


形名	EL-D10/2 (152NM) AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.5 H					
	B-B'	0.5 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

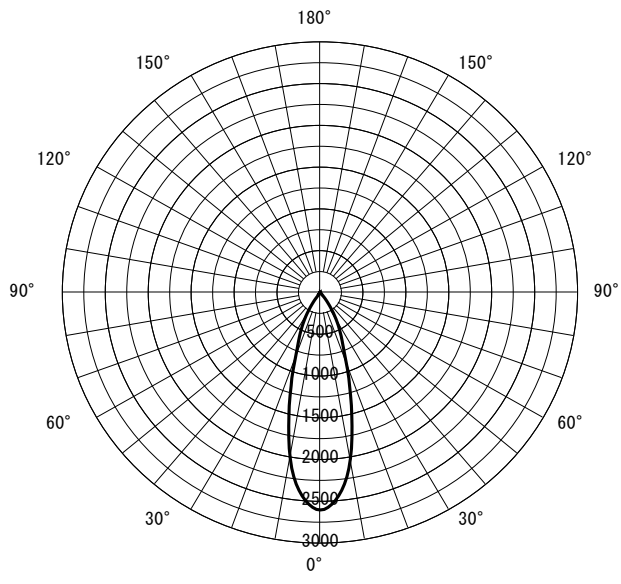

○直射水平面照度 (全光束 : 1240 × 1 = 1240lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

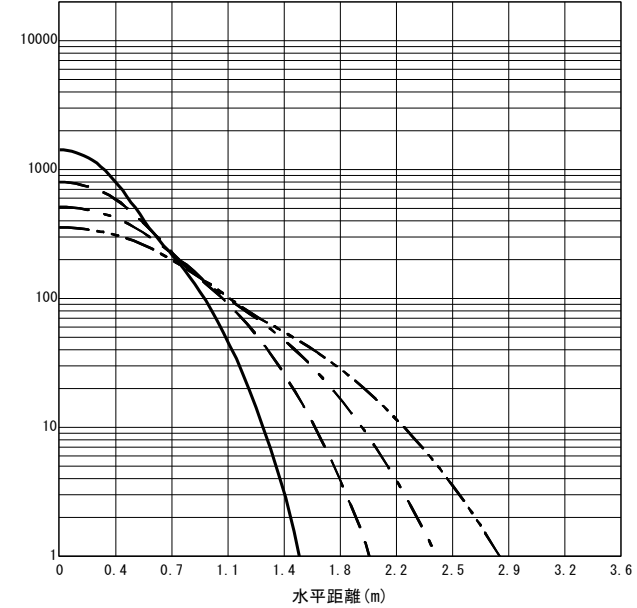

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照明率 (× 0.01)																																	
0.60	93	86	84	80	77	75	74	92	85	84	80	79	76	75	74	90	84	82	79	78	76	75	74	87	83	81	79	77	76	74	74	74	73	
0.80	101	92	92	87	87	83	81	99	91	92	86	86	83	83	81	96	90	90	86	85	83	82	80	93	88	88	85	84	82	81	80	80	79	
1.00	106	95	98	91	92	88	88	85	104	95	97	90	92	87	88	85	100	93	94	89	90	87	87	85	97	92	92	88	88	86	86	84	84	83
1.25	111	98	103	94	97	91	93	89	108	97	101	94	96	91	93	89	104	96	98	93	94	90	91	88	100	94	96	91	92	89	89	88	87	86
1.50	114	100	106	97	101	94	97	92	111	99	105	96	100	93	96	91	106	97	101	95	97	92	94	91	102	96	98	93	95	92	92	90	90	89
2.00	118	102	111	100	107	97	103	95	115	101	109	99	105	97	101	95	109	99	105	97	101	96	98	94	104	98	101	96	98	94	96	93	93	91
2.50	120	104	115	101	110	99	107	98	117	103	112	101	108	99	105	97	111	101	107	99	104	97	101	96	105	99	103	97	100	96	98	95	94	93
3.00	122	105	117	103	113	101	110	99	118	104	114	102	111	100	108	99	112	102	109	100	106	99	104	97	106	100	104	98	102	97	100	96	96	94
4.00	124	106	120	104	117	103	114	101	120	105	117	103	114	102	111	101	113	103	111	101	109	100	107	99	107	101	105	100	104	99	102	98	97	96
5.00	126	106	123	105	120	104	117	103	122	105	119	104	116	103	114	102	114	103	112	102	110	101	109	101	108	101	106	100	105	100	104	99	98	97
7.00	128	107	125	106	123	105	121	104	123	106	121	105	119	104	117	104	115	104	114	103	112	103	111	102	109	102	107	101	106	101	105	100	99	98
10.00	129	108	127	107	125	106	124	106	124	107	123	106	121	105	120	105	116	104	115	104	114	103	113	103	109	102	108	102	107	102	107	101	100	98

JIS C 8030:2014

三菱電機照明株式会社