



○諸特性

光源		LED870lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.80m	2.40m	3.00m	3.60m	
	B-B	1.80m	2.40m	3.00m	3.60m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.820	普通	0.770	悪い	0.690

○配光曲線図 (cd/1000lm)

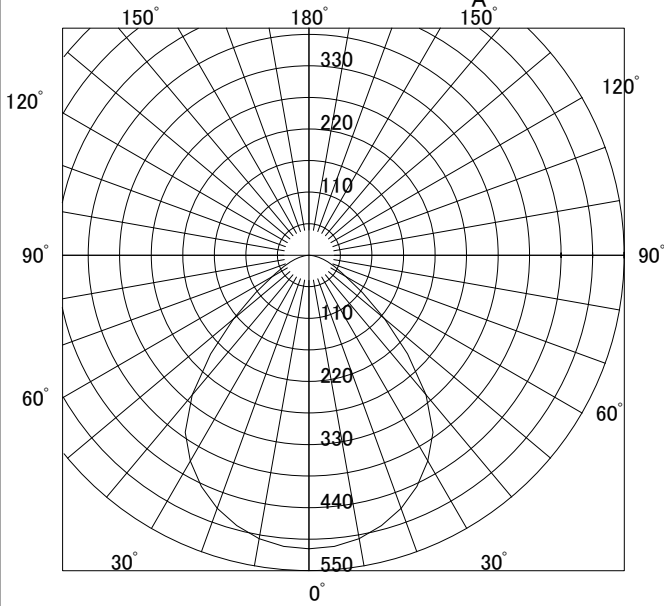

○直射水平面照度

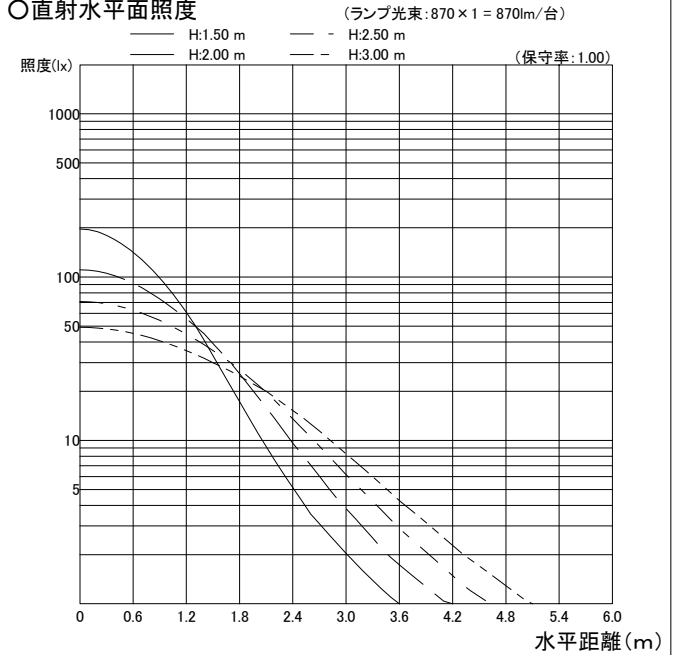

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	53	72	82	90	98	103	109	114	116	120	122	125	127
		10	49	67	74	81	87	90	95	98	100	102	103	105	106
	50	30	40	60	69	78	87	92	100	106	109	114	117	121	124
		10	39	57	65	72	80	84	89	94	96	99	101	103	105
70	70	30	52	71	80	88	96	100	106	110	112	116	118	120	122
		10	49	66	73	80	86	89	94	97	98	101	102	104	105
	50	30	40	59	68	77	86	90	98	103	106	111	114	117	120
		10	38	56	64	72	79	83	88	93	95	98	100	102	104
50	70	30	33	52	60	69	78	83	91	97	101	106	110	114	118
		10	32	50	58	66	74	78	84	89	92	95	98	100	102
	50	30	39	57	66	74	83	87	93	98	101	105	107	110	112
		10	38	55	63	70	78	81	87	91	93	96	98	100	101
30	70	30	33	51	59	68	76	81	88	94	97	101	104	108	110
		10	32	50	57	65	73	77	83	88	90	94	96	98	100
	50	30	33	51	59	68	76	81	88	94	97	101	104	108	110
		10	32	50	57	65	73	77	83	88	90	94	96	98	100
0	70	30	32	50	58	66	75	78	85	90	93	97	99	102	104
		10	32	49	57	64	72	76	82	86	89	92	94	97	98
	50	30	32	50	58	66	75	78	85	90	93	97	99	102	104
		10	28	46	53	61	69	73	79	84	87	90	93	96	98
30	30	32	50	58	66	75	78	85	90	93	97	99	102	104	
	10	28	46	53	61	69	73	79	84	87	90	93	96	98	
0	30	32	50	58	66	75	78	85	90	93	97	99	102	104	
	10	28	46	53	61	69	73	79	84	87	90	93	96	98	
0	30	32	50	58	66	75	78	85	90	93	97	99	102	104	
	10	28	46	53	61	69	73	79	84	87	90	93	96	98	
0	30	32	50	58	66	75	78	85	90	93	97	99	102	104	
	10	28	46	53	61	69	73	79	84	87	90	93	96	98	