


形名	EL-D11/3 (300MM) AHZ	電源		○諸特性
出力	連調調色	温度		
モード			(色温度可変機種)電球色相当	
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.1 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

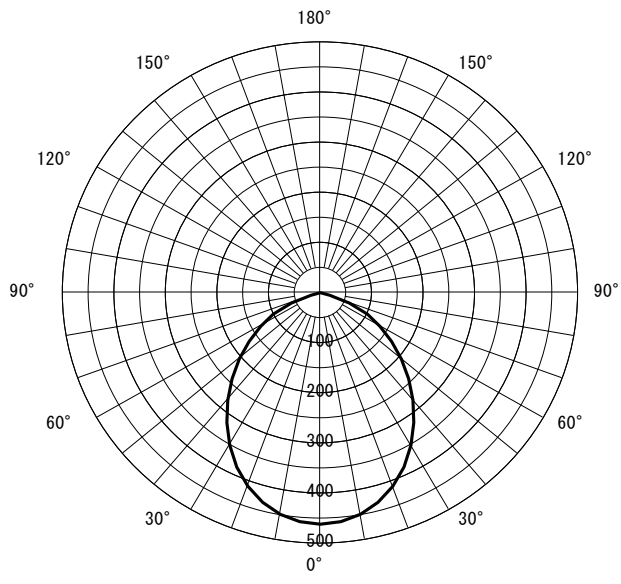

○直射水平面照度 (全光束: 1740 × 1 = 1740lm/台)

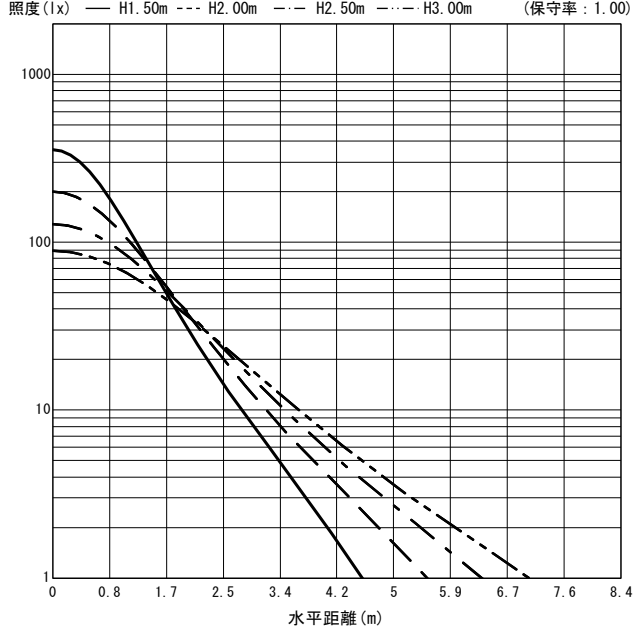

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	68	62	54	51	46	44	40	39	66	61	53	51	45	44	40	39	63	59	52	50	45	44	40	39	60	57	51	49	44	43	39	39	39	37								
0.80	80	73	67	62	58	56	52	51	78	71	65	62	57	55	52	50	74	69	63	61	56	55	51	50	70	67	62	59	55	54	51	50	50	48								
1.00	88	79	75	70	67	63	61	58	86	78	74	69	66	63	60	58	81	75	71	68	65	62	59	58	77	73	69	66	63	61	58	58	57	56								
1.25	96	85	84	77	75	71	69	66	93	83	82	76	74	70	69	66	88	81	79	74	72	69	67	65	83	78	76	73	71	68	66	65	65	63								
1.50	101	89	90	82	82	76	76	71	98	87	88	81	81	75	75	71	92	85	84	79	78	74	73	70	87	82	81	77	76	73	72	70	70	68								
2.00	108	94	98	88	91	83	85	79	104	92	96	87	89	83	84	79	98	90	92	85	86	81	82	78	93	87	88	83	83	80	79	77	77	75								
2.50	112	97	104	92	98	88	92	84	109	95	101	91	95	87	91	84	102	93	96	89	92	86	87	83	96	90	92	87	88	84	85	82	81	80								
3.00	115	99	108	95	102	91	97	88	111	98	105	94	100	90	95	87	104	95	100	92	95	89	92	86	98	92	95	90	91	87	88	85	85	83								
4.00	119	101	113	98	108	95	104	93	115	100	110	97	106	94	102	92	108	98	104	95	100	93	97	91	101	95	98	93	96	91	93	89	89	87								
5.00	122	103	117	100	112	98	109	96	117	102	113	99	109	97	106	95	110	99	106	97	103	95	101	93	103	97	101	95	98	93	96	92	91	89								
7.00	124	105	121	103	117	101	114	99	120	103	117	101	114	100	111	98	112	101	110	99	107	98	105	97	105	99	103	97	101	96	100	95	94	92								
10.00	127	106	124	104	121	103	119	102	122	105	120	103	117	102	115	101	114	102	112	101	110	100	109	99	106	100	105	99	104	98	103	97	96	95								

JIS C 8030:2014

三菱電機照明株式会社