


形名	EL-D16/2 (152NM) AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.1%	99.9%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

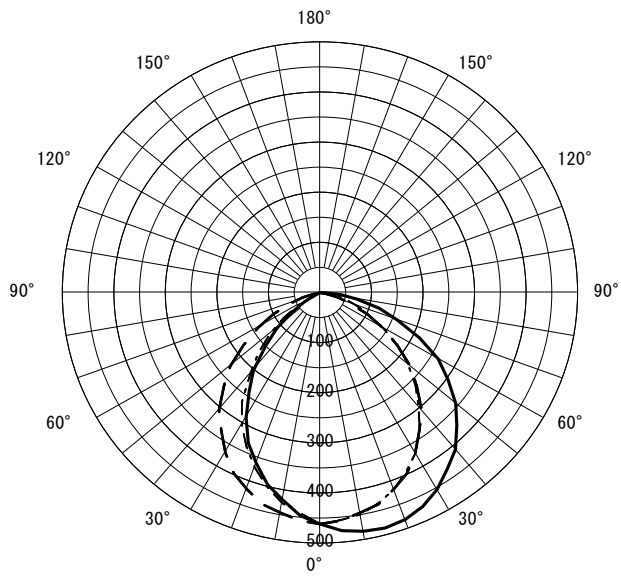

○直射水平面照度 (全光束: 1530 × 1 = 1530lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

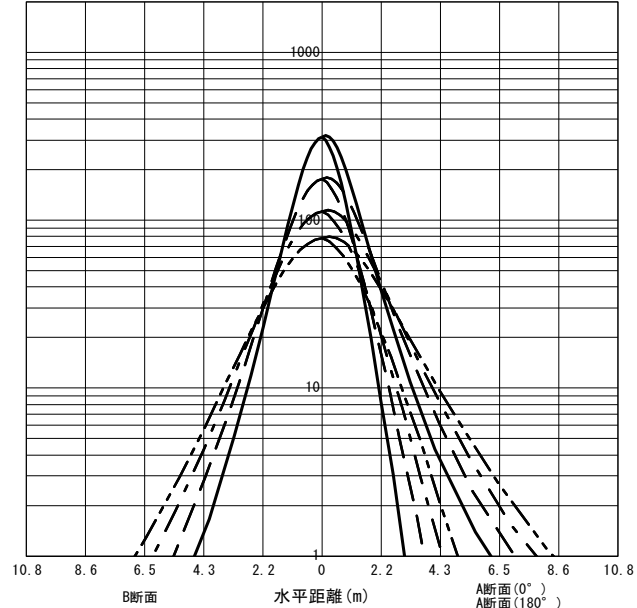

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照明率 (× 0.01)																																	
0.60	68	62	54	51	45	44	40	39	66	61	53	51	45	44	40	39	63	59	52	50	44	43	39	39	60	57	50	49	44	43	39	39	39	37
0.80	80	72	66	62	58	55	52	50	78	71	65	62	57	55	51	50	74	69	63	60	56	54	51	50	70	66	61	59	55	54	50	50	50	48
1.00	88	79	75	70	66	63	60	58	85	77	74	69	66	63	60	58	81	75	71	67	64	62	59	57	77	72	69	66	63	61	58	57	57	55
1.25	95	84	83	76	75	70	68	65	92	83	82	75	74	70	68	65	87	80	78	74	72	69	67	65	83	78	75	72	70	68	65	64	64	62
1.50	100	88	89	81	81	75	75	70	97	87	87	80	80	75	74	70	91	84	83	78	77	73	72	70	87	81	80	77	75	72	71	69	69	67
2.00	107	93	98	87	90	82	84	78	104	92	95	86	88	81	83	78	97	89	91	84	85	80	80	77	92	86	87	82	82	79	78	76	76	74
2.50	112	96	103	91	96	87	91	83	108	95	100	90	94	86	89	83	101	92	95	88	90	85	86	82	95	90	91	86	87	83	83	81	80	78
3.00	115	98	107	94	101	90	96	87	111	97	104	93	99	89	94	86	104	94	99	91	94	88	90	85	98	92	94	89	90	86	87	84	83	81
4.00	119	101	113	97	107	94	103	91	114	100	109	96	105	93	100	91	107	97	103	94	99	92	96	89	101	94	97	92	95	90	92	88	88	86
5.00	121	102	116	100	111	97	107	95	117	101	112	98	108	96	105	94	109	99	106	96	103	94	100	92	102	96	100	94	97	93	95	91	90	88
7.00	124	104	120	102	117	100	113	98	119	103	116	101	113	99	110	97	111	100	109	99	106	97	104	96	104	98	102	97	101	95	99	94	93	91
10.00	126	106	123	104	121	103	118	101	122	104	119	103	117	102	115	100	113	102	111	101	110	100	108	98	106	100	105	99	103	98	102	97	96	94

JIS C 8030:2014

三菱電機照明株式会社