


形名	EL-D18/3 (152NM) AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

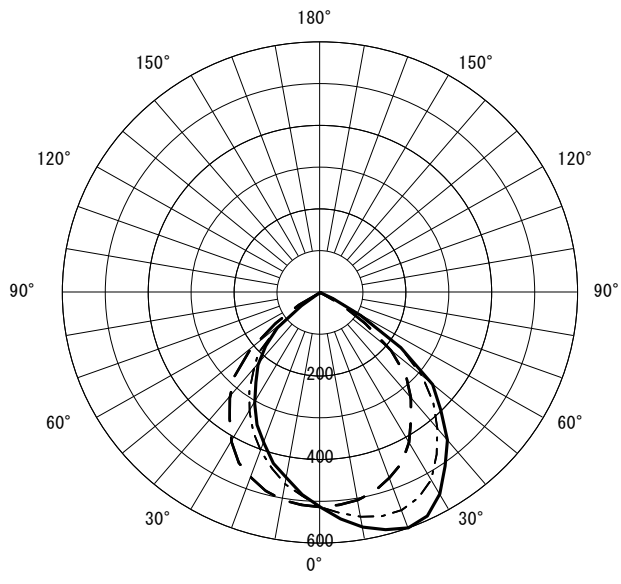

○直射水平面照度 (全光束: 1480 × 1 = 1480lm/台)

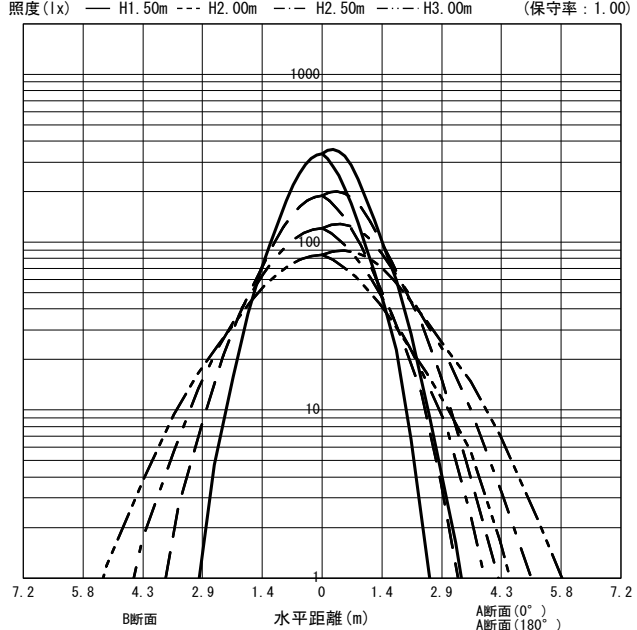

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	作業面照明率 (× 0.01)																																	
0.60	72	67	59	56	52	50	46	46	71	65	59	56	51	50	46	45	68	63	57	55	51	49	46	45	65	62	56	54	50	49	46	45	45	44
0.80	85	77	73	68	65	62	59	58	83	76	72	68	64	62	59	58	79	74	70	67	63	62	59	58	76	72	68	66	62	61	58	57	57	56
1.00	93	84	82	76	74	71	69	66	91	83	81	75	73	70	68	66	87	80	78	74	72	69	67	66	83	78	76	73	71	69	66	65	65	64
1.25	100	89	90	82	83	77	77	73	98	88	88	82	81	77	76	73	93	86	85	80	79	76	75	73	89	83	82	79	77	75	74	72	72	70
1.50	105	92	95	87	88	82	83	78	102	91	93	86	87	81	82	78	97	89	90	84	84	80	80	77	92	87	87	83	82	79	78	77	76	75
2.00	111	97	103	92	97	88	91	85	108	95	101	91	95	87	90	84	102	93	96	89	91	86	88	84	97	91	92	88	88	85	85	83	82	81
2.50	115	99	108	95	102	92	97	89	111	98	105	94	100	91	96	88	105	96	100	92	96	90	92	87	99	93	96	91	92	88	89	86	86	84
3.00	118	101	111	97	106	94	102	92	114	100	108	96	104	94	100	91	107	97	103	95	99	92	96	90	101	95	98	93	95	91	92	89	89	87
4.00	121	103	116	100	111	98	108	96	117	102	112	99	109	97	105	95	110	99	106	97	103	95	101	94	103	97	101	95	98	94	96	92	92	90
5.00	123	104	119	102	115	100	112	98	119	103	115	101	112	99	109	97	111	101	108	99	106	97	104	96	105	98	103	97	101	96	99	94	94	92
7.00	125	105	122	104	119	102	117	101	121	104	118	103	116	101	113	100	113	102	111	101	109	100	107	98	106	100	105	99	103	98	102	97	96	94
10.00	127	106	125	105	123	104	121	103	123	105	121	104	119	103	117	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	99	98	96

JIS C 8030:2014

三菱電機照明株式会社