



	EL-D3000M/3W
	AHZ




○諸特性		LED2910lm M				
最大 取付 間隔	光源	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	1.83m	2.44m	3.05m	3.66m	
	B-B	1.83m	2.44m	3.05m	3.66m	
器具効率	上方光束	0.0%	下方光束		計	
			96.9%		96.9%	
保守率	良い	0.790	普通	0.750	悪い	0.660

○配光曲線図 (cd/1000lm)

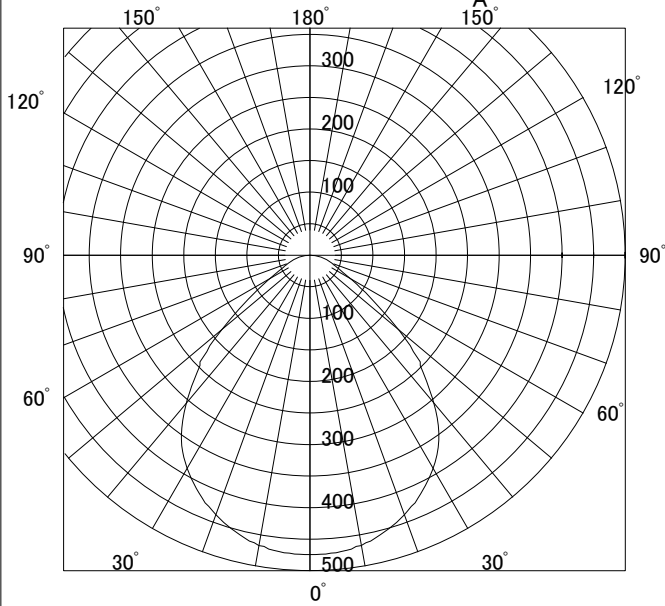

○直射水平面照度

(ランプ光束: 2910 × 1 = 2910lm/台)

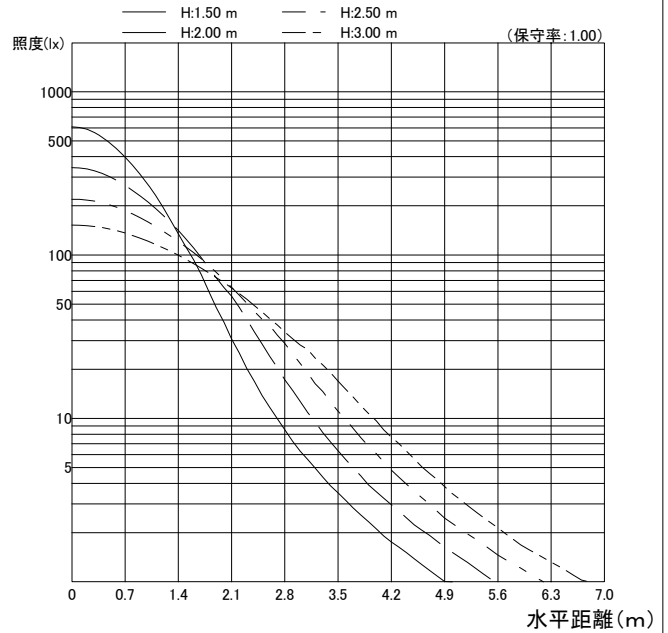

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	50	69	78	87	95	99	105	110	112	116	118	121	122
		10	47	64	71	78	84	87	92	95	96	98	100	101	102
	50	30	38	56	66	75	84	88	96	102	105	110	113	117	120
		10	36	54	62	69	77	80	86	90	92	95	97	99	101
70	70	30	49	67	76	84	92	96	102	106	109	112	114	116	118
		10	46	62	70	77	83	86	90	93	95	97	99	100	101
	50	30	37	56	65	73	82	87	94	99	103	107	110	113	116
		10	36	53	61	69	76	79	85	89	91	94	96	98	100
50	70	30	31	49	57	66	75	80	88	94	97	102	106	110	113
		10	30	47	55	63	71	75	81	86	88	92	94	97	99
	50	30	37	54	63	71	79	83	90	94	97	101	103	106	108
		10	35	52	60	67	74	78	83	87	89	92	94	96	98
30	70	30	30	48	56	64	73	77	84	90	93	97	100	104	107
		10	30	47	54	62	70	74	80	84	87	90	92	95	97
	50	30	30	47	55	63	71	75	82	86	89	93	95	98	100
0	70	30	30	47	55	63	71	75	82	86	89	93	95	98	100
		10	30	46	54	61	69	73	79	83	85	89	91	93	95
0	0	0	25	41	48	56	64	67	74	78	81	84	87	89	91