



	EL-D5511W/5W
	AHZ

○諸特性		LED4880lm W				
最大 取付 間隔	光源	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	1.94m	2.59m	3.24m	3.87m	
	B-B	1.94m	2.59m	3.24m	3.87m	
器具効率		上方光束	下方光束	計		
		0.0%	100.0%	100.0%		
保守率		良い 0.720	普通 0.680	悪い 0.610		

○配光曲線図 (cd/1000lm)

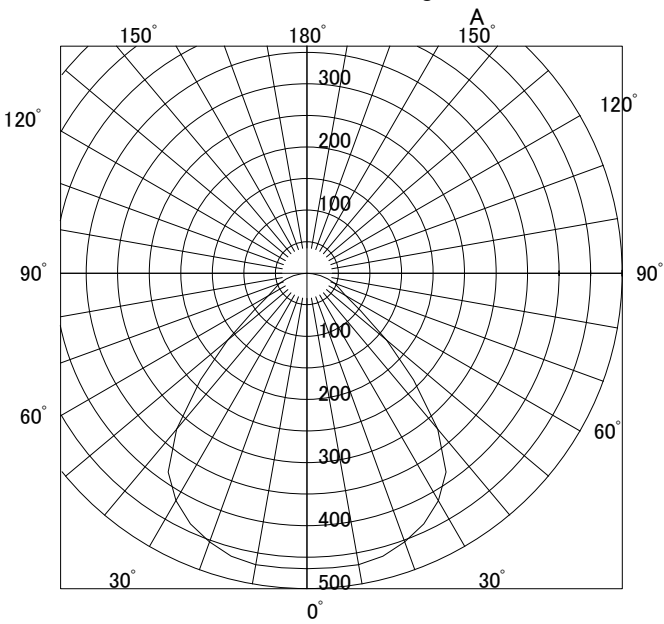

○直射水平面照度

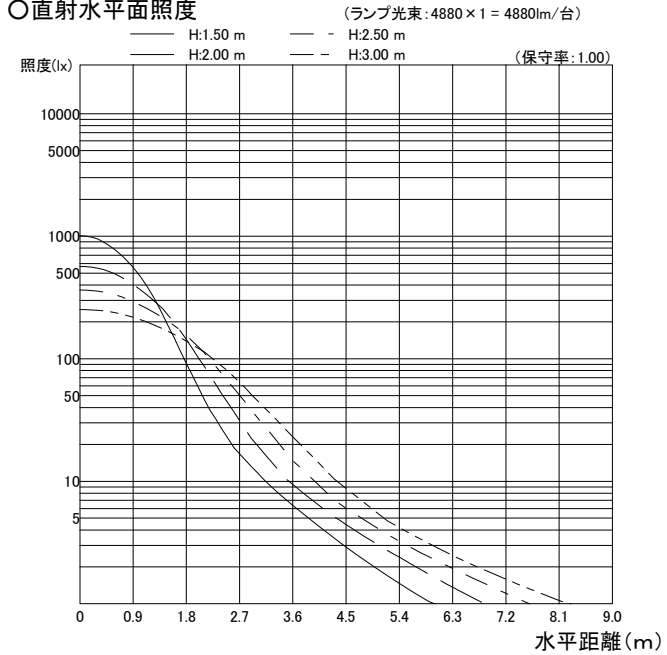

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	53	72	81	90	98	102	108	113	116	119	122	124	126
		10	49	66	74	81	87	90	94	98	99	102	103	105	106
	50	30	40	59	68	77	87	91	99	105	109	114	117	121	124
		10	39	56	64	72	79	83	89	93	95	98	100	103	104
70	70	30	51	70	79	87	95	99	105	109	112	115	118	120	122
		10	48	65	73	79	86	88	93	96	98	100	102	103	105
	50	30	40	59	67	76	85	89	97	102	106	110	113	117	120
		10	38	56	63	71	79	82	88	92	94	97	99	102	103
50	70	30	33	51	59	68	77	82	90	96	100	106	109	114	117
		10	32	50	57	65	73	77	83	88	91	95	97	100	102
	50	30	39	57	65	73	82	86	92	97	100	104	107	110	112
		10	38	55	62	70	77	80	86	90	92	95	97	99	101
30	70	30	33	51	58	67	75	80	87	93	96	101	104	107	110
		10	32	49	57	64	72	76	82	87	89	93	95	98	100
	50	30	33	51	58	67	75	80	87	93	96	101	104	107	110
0	70	30	32	50	57	65	74	77	84	89	92	96	98	102	104
		10	32	49	56	64	71	75	81	85	88	91	94	96	98
	50	30	28	45	52	60	68	72	78	83	86	90	92	95	97
	10	10	28	45	52	60	68	72	78	83	86	90	92	95	97
	0	0	27	44	50	58	66	70	76	81	83	87	90	92	94