



EL-D601N/W

EL-X0003



○配光曲線図 (cd/1000lm)

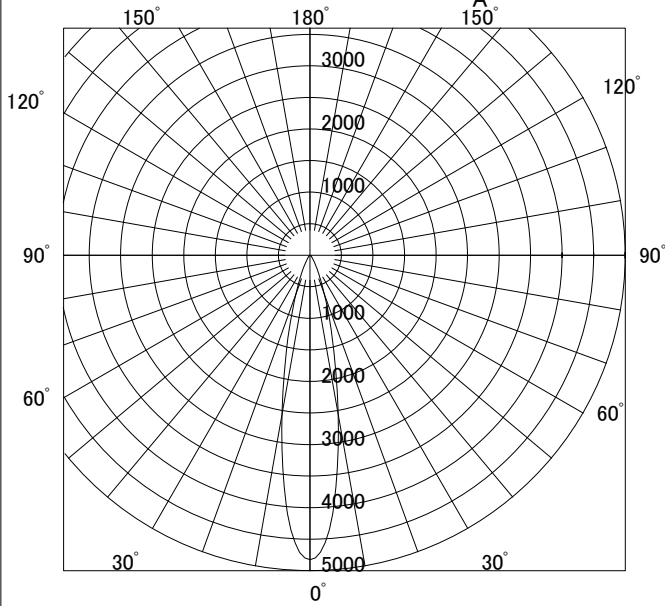


○諸特性

光源		LED625lm N(高出力)			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	0.53m	0.71m	0.89m	1.07m
	B-B	0.53m	0.71m	0.89m	1.07m
器具効率	上方光束	下方光束		計	
	0.0%	100.0%		100.0%	
保守率	良い 0.750	普通 0.710	悪い 0.660		

○直射水平面照度

(ランプ光束: 625 × 1 = 625lm/台)

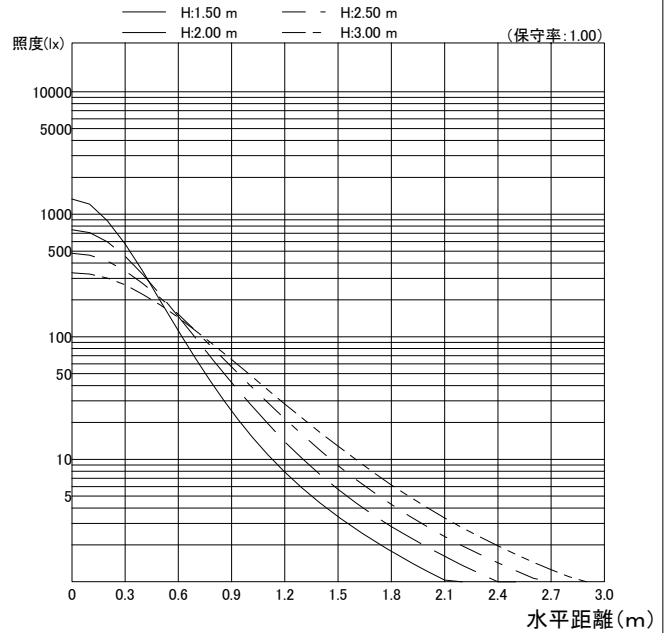

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	64	83	93	100	105	109	114	117	120	123	125	127	129
		10	60	76	85	89	94	96	99	101	103	104	105	107	108
	50	30	54	72	83	90	96	100	107	111	114	118	121	124	127
		10	52	69	78	83	88	91	95	98	100	102	104	106	107
70	30	30	48	66	76	83	90	94	101	106	109	114	118	122	125
		10	47	64	73	79	84	87	92	95	97	100	102	105	107
	10	30	43	60	70	75	81	84	89	93	95	99	101	104	106
		10	43	60	70	75	81	84	89	93	95	98	100	103	105
50	70	30	63	82	91	97	103	106	111	114	116	119	121	123	124
		10	60	76	84	88	92	95	98	100	101	103	104	106	107
	50	30	53	72	82	88	95	99	104	108	111	115	117	120	123
		10	51	68	77	83	88	90	94	97	99	101	103	105	106
30	50	30	47	65	74	81	87	90	96	99	102	106	109	111	113
		10	46	63	72	78	83	86	90	93	95	98	100	101	103
	30	30	47	64	73	79	85	88	93	96	98	101	103	106	108
		10	46	63	72	77	82	85	89	92	94	97	98	100	102
0	0	30	47	64	73	79	85	88	93	96	98	101	103	106	108
		10	46	63	72	77	82	85	89	92	94	97	98	100	102
0	0	30	43	60	69	75	80	83	87	90	92	95	97	100	102
		10	43	60	69	75	80	83	87	90	92	95	97	100	102
0	0	0	42	59	68	73	78	81	85	88	90	93	95	97	99