


	EL-D601N/W
	EL-X0004


○諸特性

光源		LED625lm N(高出力)			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	0.71m	0.95m	1.19m	1.42m
	B-B	0.71m	0.95m	1.19m	1.42m
器具効率		上方光束	下方光束	計	
		0.0%	100.0%	100.0%	
保守率		良い 0.750	普通 0.710	悪い 0.660	

○配光曲線図 (cd/1000lm)

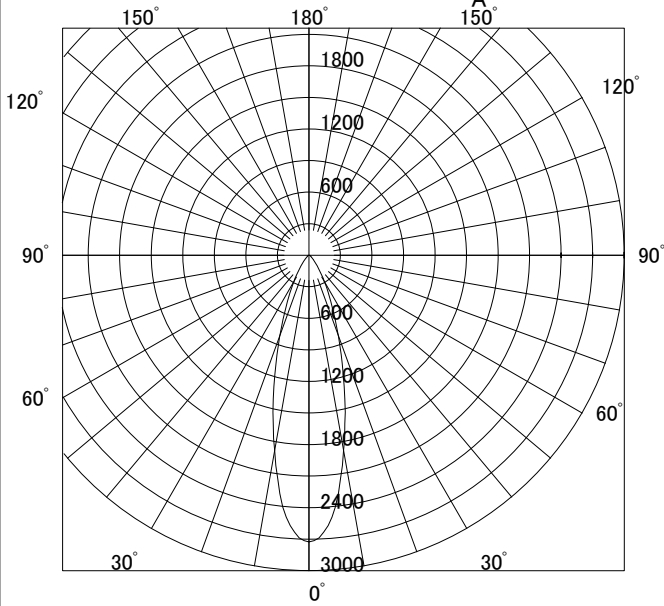

○直射水平面照度

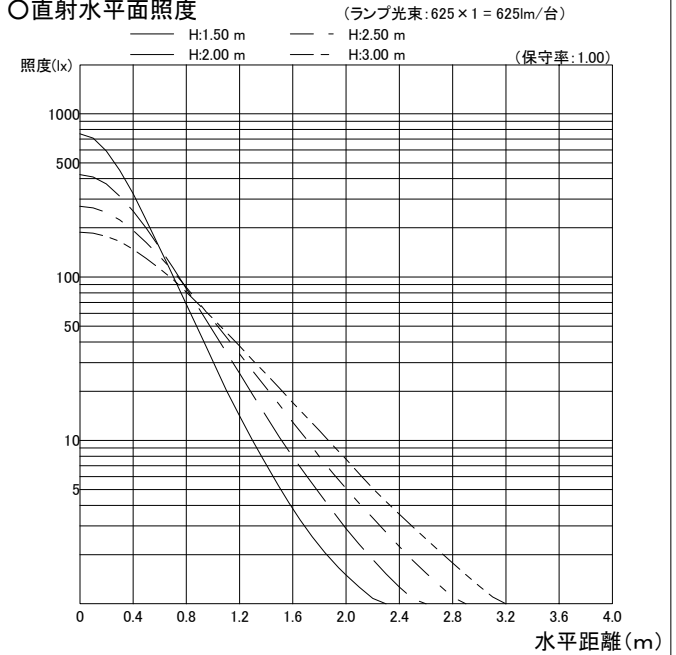

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	63	82	92	99	105	108	114	117	119	122	124	127	129
		10	60	76	84	89	93	96	99	101	102	104	105	107	108
	50	30	53	71	82	89	95	100	106	110	114	118	121	124	127
		10	51	68	77	82	87	91	95	98	99	102	104	106	107
70	30	30	46	65	75	82	89	93	100	105	109	114	117	122	125
		10	46	63	72	78	83	87	91	95	97	100	102	105	106
	10	30	42	59	68	74	80	84	89	92	95	98	101	104	106
		10	42	59	68	74	80	83	88	92	94	98	100	103	105
50	30	30	51	69	79	85	91	94	99	103	105	108	110	113	115
		10	50	66	75	81	85	88	92	95	97	99	101	103	104
	10	30	46	63	73	80	86	90	95	99	102	106	108	111	114
		10	45	62	71	77	82	85	90	93	95	98	100	102	103
30	30	46	63	72	78	84	87	92	95	98	101	103	106	107	
	10	45	62	71	76	81	84	89	91	93	96	98	100	102	
0	0	0	41	57	66	72	77	80	85	88	90	93	95	97	99