


EL-D601N/W


EL-X0001

○諸特性

光源		LED660lm N(高出力)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	0.26m	0.34m	0.43m	0.52m	
	B-B	0.26m	0.34m	0.43m	0.52m	
器具効率	上方光束	下方光束		計		
	0.0%	100.4%		100.4%		
保守率	良い	0.750	普通	0.710	悪い	0.660




○配光曲線図 (cd/1000lm)

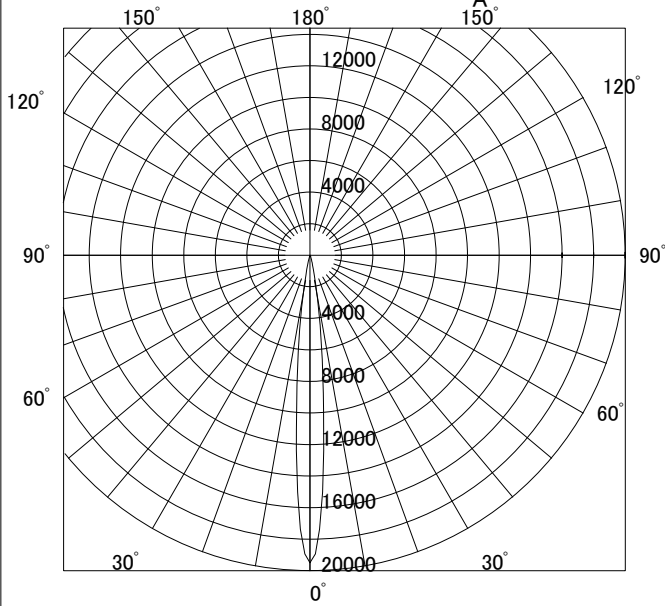

○直射水平面照度

(ランプ光束: 660 × 1 = 660lm/台)

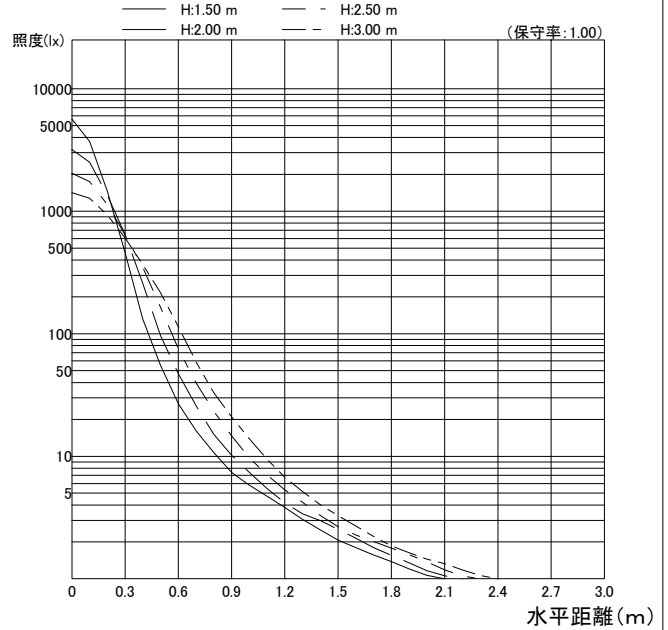

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	65	84	94	100	106	110	115	118	120	123	125	128	129
		10	61	77	86	90	94	97	100	102	103	105	106	107	108
	50	30	55	73	84	91	97	101	107	112	115	119	122	125	128
		10	53	70	79	84	89	92	96	99	101	103	105	106	108
70	30	30	49	67	77	84	91	95	102	106	110	115	118	123	126
		10	48	65	74	80	85	88	93	96	98	101	103	106	107
	50	30	64	83	92	98	104	107	112	115	117	119	121	123	125
		10	61	77	85	89	93	96	99	101	102	104	105	106	107
50	30	30	54	73	83	89	96	100	105	109	112	116	118	121	124
		10	52	69	78	84	88	91	95	98	100	102	104	105	107
	50	30	48	67	77	83	90	94	100	104	108	112	115	119	122
		10	48	65	74	80	85	88	92	95	97	100	102	105	106
30	30	30	53	71	81	87	93	96	101	104	106	109	112	114	116
		10	52	69	77	83	87	90	94	96	98	100	102	103	105
	30	30	48	66	76	82	88	91	97	100	103	107	109	112	115
		10	47	64	73	79	84	87	91	94	96	99	101	103	104
0	0	30	48	65	75	80	86	89	93	97	99	102	104	107	108
		10	47	64	73	78	83	86	90	93	95	97	99	101	102
0	0	0	43	60	69	74	79	82	86	89	91	94	96	98	100