



	EL-D9006W/6W
	AHZ

○諸特性					
光源		LED8970lm W			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	1.82m	2.43m	3.04m	3.64m
	B-B	1.82m	2.43m	3.04m	3.64m
器具効率		上方光束	下方光束	計	
		0.0%	100.0%	100.0%	
保守率		良い 0.720	普通 0.680	悪い 0.610	

○配光曲線図 (cd/1000lm)

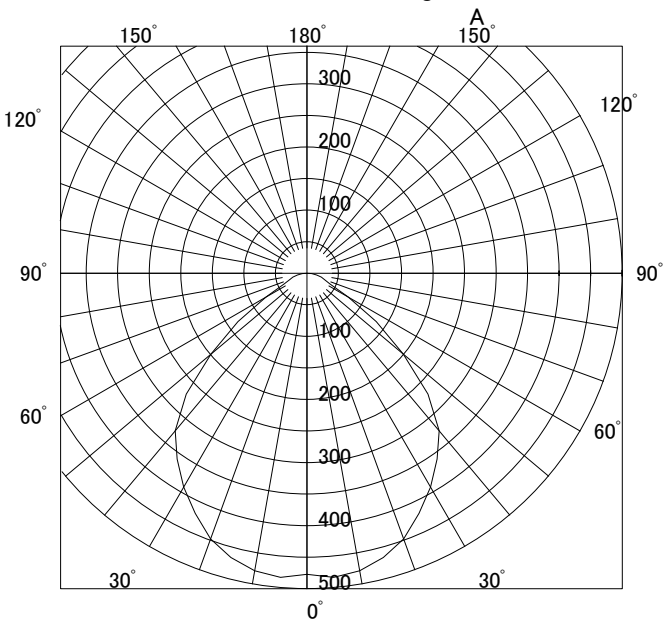

○直射水平面照度

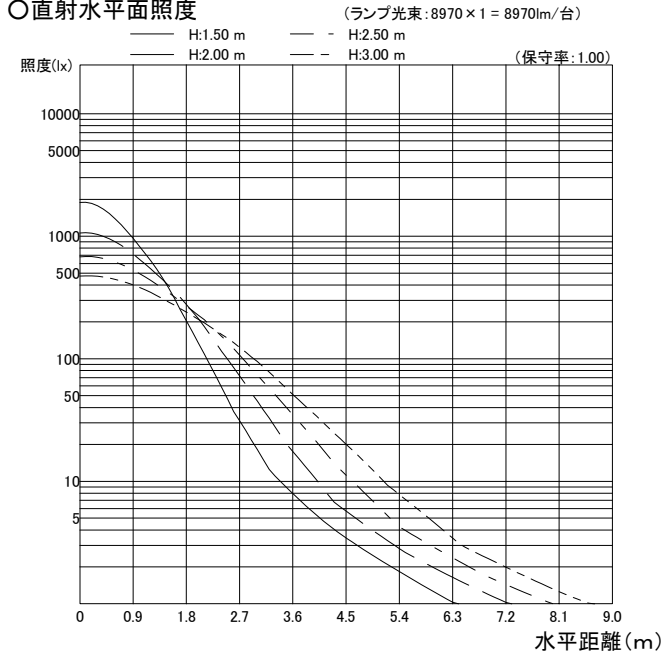

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	51	70	81	89	98	102	109	113	116	119	122	124	126
		10	48	65	73	80	87	90	95	98	99	102	103	104	106
	50	30	38	57	67	77	86	91	99	105	109	114	117	120	123
		10	37	55	63	71	79	83	89	93	95	98	100	102	104
70	70	30	50	69	78	87	95	99	105	110	112	115	117	120	122
		10	47	64	72	79	85	88	93	96	98	100	102	103	104
	50	30	38	57	66	76	85	89	97	103	106	110	113	116	119
		10	36	54	63	71	78	82	88	92	94	97	99	101	103
50	70	30	31	49	58	68	77	82	91	97	101	106	109	113	117
		10	30	48	56	65	73	77	84	88	91	95	97	100	102
	50	30	37	55	64	73	82	86	93	98	100	104	107	109	111
		10	36	53	61	69	77	80	86	90	92	95	97	99	101
30	70	30	31	48	57	66	75	80	87	93	96	101	104	107	110
		10	30	47	56	64	72	76	82	87	90	93	95	98	100
	30	30	30	48	56	65	73	77	84	89	92	96	98	101	103
0	70	10	26	43	51	59	68	72	78	83	86	90	92	95	97
	0	0	25	41	49	57	66	70	76	81	84	87	89	92	94