


形名	EL-D9011WM/6W AHTZ	電源		○諸特性
出力	段調光	温度		
モード	節電			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.760	普通	0.720	悪い	0.640

○配光曲線図 (cd/1000lm)

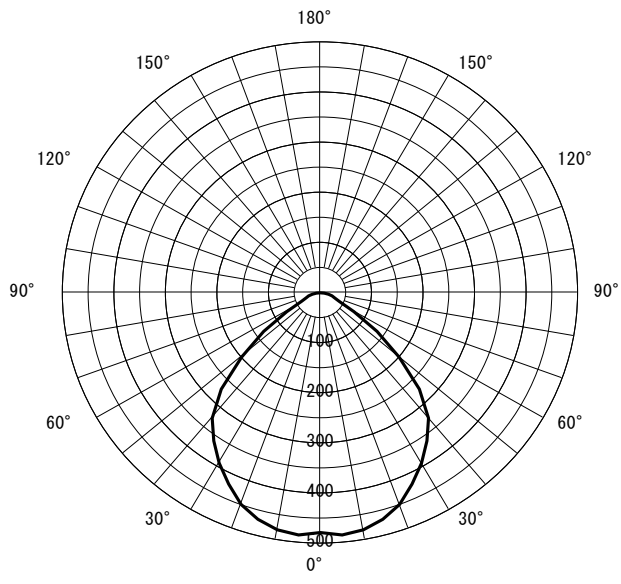

○直射水平面照度 (全光束: 8320 × 1 = 8320lm/台)

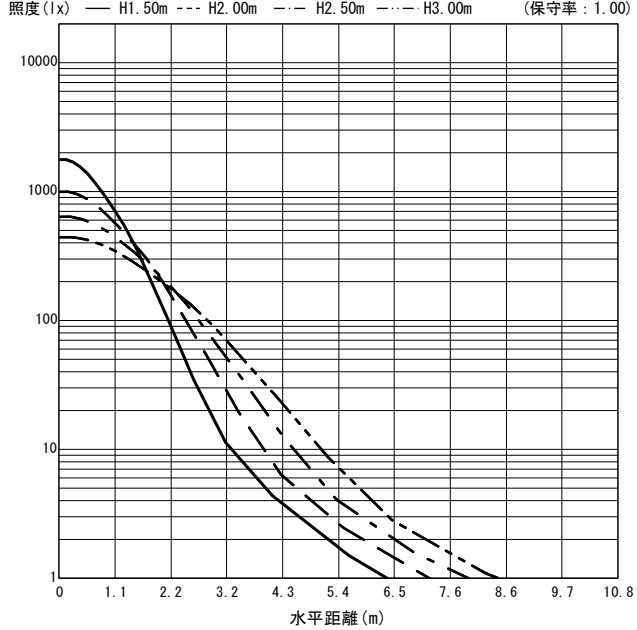

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照度 (× 0.01)																																	
0.60	70	65	57	54	49	48	44	43	69	64	56	54	49	47	43	43	66	62	55	53	48	47	43	43	63	60	54	52	47	46	43	43	42	41
0.80	83	75	70	66	62	59	56	55	81	74	69	65	61	59	56	55	77	72	67	64	60	58	55	54	74	69	65	63	59	58	55	54	54	52
1.00	91	82	79	73	71	67	65	63	89	80	78	73	70	67	64	62	84	78	75	71	69	66	64	62	80	76	73	70	67	65	63	62	62	60
1.25	98	87	87	80	79	74	73	70	95	86	85	79	78	74	72	69	90	83	82	77	76	73	71	69	86	81	79	76	74	72	70	68	68	67
1.50	103	90	92	84	85	79	79	75	100	89	90	83	84	78	78	74	94	87	87	81	81	77	76	74	90	84	83	80	79	76	75	73	73	71
2.00	109	95	100	90	93	85	88	81	106	94	98	89	92	85	87	81	100	91	93	87	88	83	84	80	94	89	89	85	85	82	82	79	79	77
2.50	113	98	106	93	99	89	94	86	110	96	103	92	97	89	92	85	103	94	98	90	93	87	89	85	97	91	93	88	90	86	86	84	83	81
3.00	116	100	109	96	104	92	99	89	112	98	106	95	101	91	97	89	105	96	101	93	97	90	93	88	99	93	96	91	93	88	90	86	86	84
4.00	120	102	114	99	109	96	105	94	116	101	111	98	106	95	103	93	108	98	105	96	101	94	98	92	102	96	99	94	96	92	94	90	90	88
5.00	122	103	117	101	113	98	109	96	118	102	114	100	110	97	107	96	110	99	107	98	104	96	102	94	104	97	101	96	99	94	97	93	92	90
7.00	125	105	121	103	118	101	115	100	120	104	117	102	114	100	112	99	112	101	110	100	108	98	106	97	105	99	104	98	102	97	100	95	95	93
10.00	127	106	124	105	122	103	119	102	122	105	120	104	118	102	116	101	114	102	112	101	111	100	109	99	107	100	105	99	104	98	103	98	97	95

JIS C 8030:2014

三菱電機照明株式会社