


EL-G3505AWM


AHTJ




○諸特性

光源		LED3370lm W(標準出力)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.89m	2.47m	3.09m	3.71m	
	B-B	1.64m	2.06m	2.58m	3.09m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.900	普通	0.860	悪い	0.760

○配光曲線図(cd/1000lm)

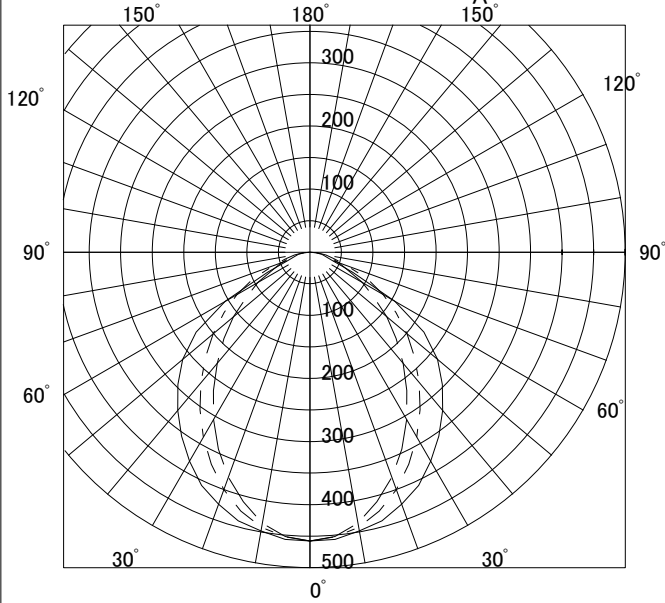

○直射水平面照度

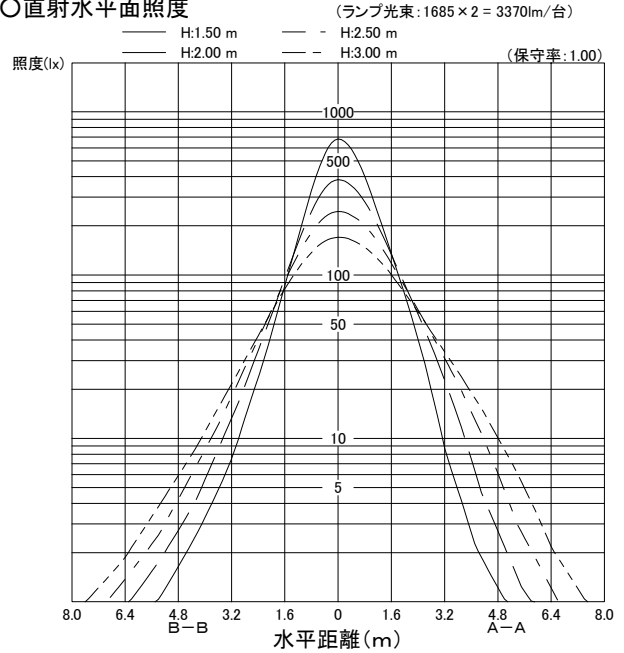

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	48	67	77	86	94	99	106	111	114	118	121	124	126
		10	45	62	70	77	84	87	93	96	98	101	102	104	105
	50	30	35	53	63	73	82	88	96	103	107	112	116	120	123
		10	34	50	59	67	75	79	86	91	93	97	99	102	104
70	70	30	28	45	54	63	73	79	88	96	100	106	111	116	120
		10	27	43	52	60	69	73	81	86	89	94	96	100	102
	50	30	34	51	60	69	77	82	89	95	98	102	105	109	111
		10	33	49	57	65	73	77	83	88	90	94	96	98	100
30	30	27	44	52	61	70	75	84	90	93	99	102	106	109	
	10	27	43	51	59	67	72	79	84	87	91	94	97	99	
10	30	23	38	46	54	63	68	75	81	84	89	92	95	98	
	10	23	38	46	54	63	68	75	81	84	89	92	95	98	
30	30	27	43	51	60	68	73	81	86	89	94	97	100	103	
	10	27	42	50	58	66	71	78	83	86	89	92	95	97	
10	30	23	38	46	54	63	67	74	80	83	87	90	94	96	
	10	23	38	46	54	63	67	74	80	83	87	90	94	96	
0	0	0	21	36	44	52	60	65	72	77	81	85	88	91	93