



EL-G35201AN/6
EL-GU45200N
AHZ




○諸特性

光源		LED4780lm N					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.00m	2.62m	3.27m	3.92m		
	B-B	1.68m	2.11m	2.63m	3.16m		
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.900	普通	0.860	悪い	0.760

○配光曲線図 (cd/1000lm)

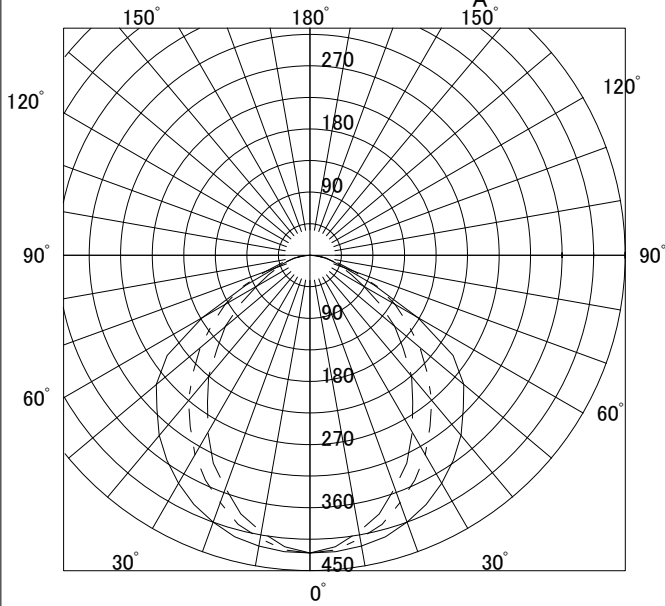

○直射水平面照度

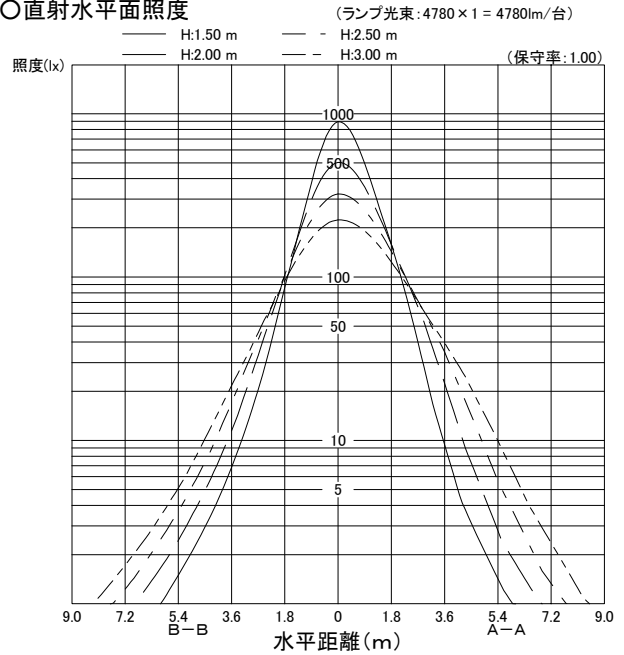

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	47	66	76	85	93	98	106	111	114	118	121	124	126
		10	44	60	69	76	83	87	92	96	98	100	102	104	105
	50	30	34	52	62	71	81	87	96	102	106	112	115	119	123
		10	33	49	58	66	74	79	85	90	93	97	99	102	104
70	30	30	27	43	53	62	72	78	88	95	99	106	110	116	120
		10	26	42	51	59	68	72	80	85	89	93	96	99	102
	10	70	46	64	74	82	90	95	102	107	110	114	116	119	121
		10	44	59	68	75	81	85	90	94	96	99	101	103	104
50	30	30	34	51	61	70	79	85	93	99	103	108	112	115	119
		10	33	49	57	65	73	78	84	89	92	95	98	100	102
	10	50	33	49	59	67	76	81	89	94	97	102	105	108	111
		10	32	47	56	64	72	76	82	87	90	93	96	98	100
30	30	26	42	51	60	69	74	83	89	93	98	102	106	109	
	10	26	41	50	58	66	71	78	83	86	91	93	97	99	
10	30	22	37	45	53	62	66	74	80	83	88	91	95	98	
	10	22	37	45	53	62	66	74	80	83	88	91	95	98	
0	30	30	26	41	50	59	67	72	80	85	89	93	96	100	103
	10	10	26	41	49	57	65	70	77	82	85	89	92	95	97
0	10	10	22	36	45	53	61	66	73	79	82	87	90	93	96
	0	0	20	35	43	51	59	64	71	77	80	84	87	91	93