



EL-G35211AN/6
EL-GU45200N
AHZ




○配光曲線図 (cd/1000lm)

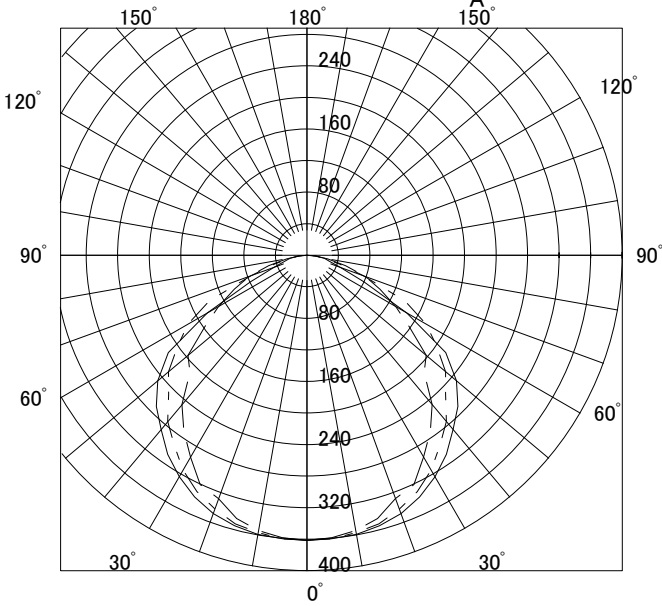

○諸特性

光源		LED5200lm N				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.03m	2.65m	3.31m	3.97m	
	B-B	1.89m	2.43m	3.03m	3.63m	
器具効率	上方光束	100.0%		計		
	下方光束	0.0%		100.0%		
保守率	良い	0.900	普通	0.860	悪い	0.760

○直射水平面照度

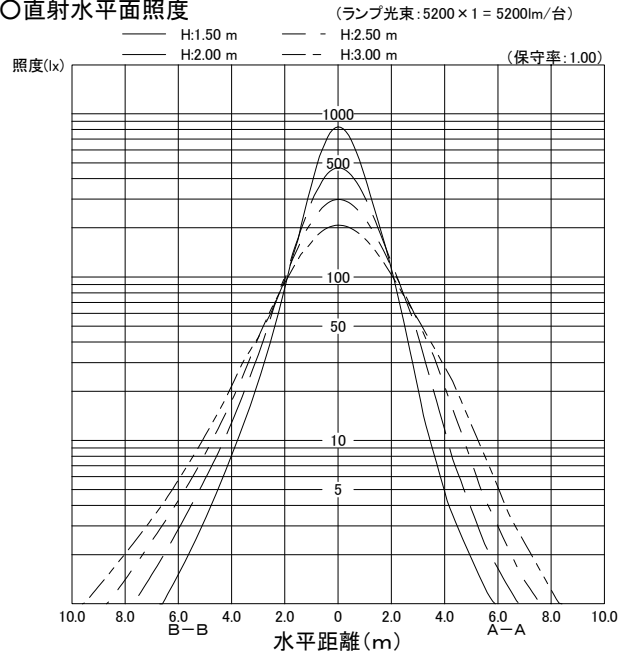

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	46	64	74	83	92	97	105	110	113	118	120	123	126
		10	43	59	67	75	82	86	91	95	97	100	102	104	105
	50	30	32	49	60	69	79	85	94	101	105	111	115	119	123
		10	31	47	56	64	72	77	84	89	92	96	99	101	103
70	30	30	25	40	50	60	70	76	86	93	98	105	110	115	120
		10	24	39	48	57	65	70	78	84	88	92	96	99	102
	10	70	20	34	43	51	60	65	74	80	84	89	93	97	100
		30	25	40	50	60	70	76	86	93	98	105	110	115	120
50	30	30	31	47	56	65	74	79	87	93	97	101	104	108	111
		10	30	45	54	62	70	74	81	86	89	93	95	98	100
	10	30	24	39	49	58	67	72	81	88	92	97	101	105	109
		10	24	39	47	56	64	69	77	82	85	90	93	96	99
30	30	24	39	48	56	65	70	78	84	88	93	96	100	102	
	10	24	38	47	55	63	68	75	81	84	88	91	94	97	
0	30	20	34	42	50	59	64	72	78	81	86	89	93	96	
	10	20	34	42	50	59	64	72	78	81	86	89	93	96	
0	0	0	18	32	40	48	57	61	69	75	79	83	87	90	93