



EL-G35211AW/6
EL-GU45200W
AHZ



○配光曲線図 (cd/1000lm)

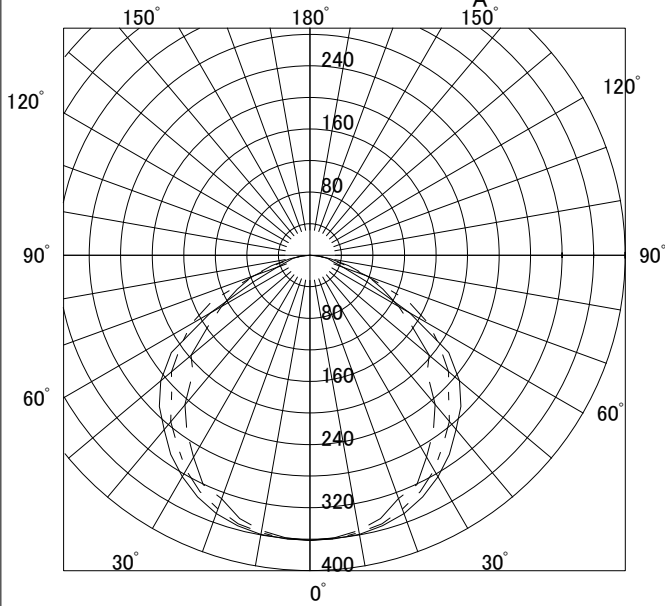


○諸特性

光源		LED4770lm W			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.03m	2.65m	3.31m	3.97m
	B-B	1.89m	2.43m	3.03m	3.63m
器具効率		上方光束	下方光束	計	
		0.0%	100.0%	100.0%	
保守率		良い 0.900	普通 0.860	悪い 0.760	

○直射水平面照度

(ランプ光束: 4770 × 1 = 4770lm/台)

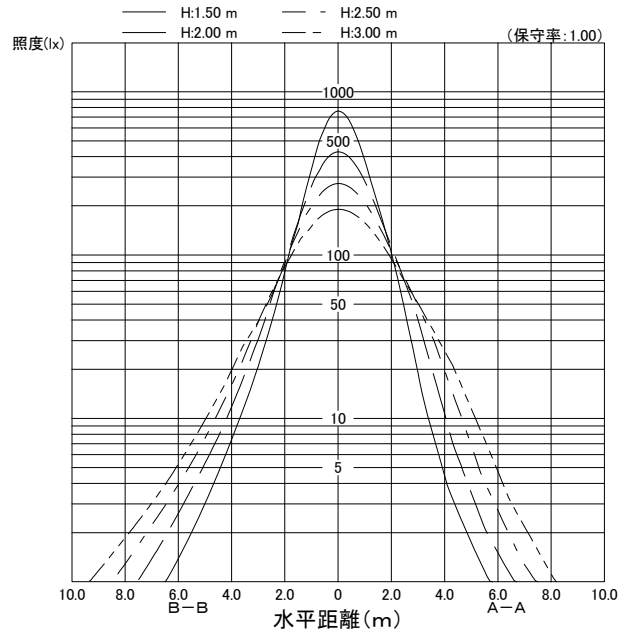

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	46	64	74	83	92	97	105	110	113	118	120	123	126
		10	43	59	67	75	82	86	91	95	97	100	102	104	105
	50	30	32	49	60	69	79	85	94	101	105	111	115	119	123
		10	31	47	56	64	72	77	84	89	92	96	99	101	103
70	70	30	45	62	72	81	89	94	101	106	109	113	116	119	121
		10	42	57	66	73	80	84	90	93	96	99	100	102	104
	50	30	32	48	59	68	77	83	92	98	102	108	111	115	118
		10	31	46	55	63	71	76	83	88	91	95	97	100	102
50	70	30	25	40	50	59	69	75	84	91	96	102	107	112	116
		10	24	39	48	56	65	70	78	83	87	92	95	98	101
	50	30	31	47	56	65	74	79	87	93	97	101	104	108	111
		10	30	45	54	62	70	74	81	86	89	93	95	98	100
30	70	30	24	39	49	58	67	72	81	88	92	97	101	105	109
		10	24	39	47	56	64	69	77	82	85	90	93	96	99
	50	30	20	34	42	51	59	64	72	78	82	87	91	95	98
		10	20	34	42	51	60	65	73	79	83	89	92	96	99
0	70	30	24	39	48	56	65	70	78	84	88	93	96	100	102
		10	24	38	47	55	63	68	75	81	84	88	91	94	97
	50	30	20	34	42	50	59	64	72	78	81	86	89	93	96
		10	20	34	42	50	59	64	72	78	81	86	89	93	96
30	30	18	32	40	48	57	61	69	75	79	83	87	90	93	
	10	18	32	40	48	57	61	69	75	79	83	87	90	93	