



| | | | | |
|--------|--------------------|----|-------|----------------|
| 形名 | EL-GT15114N/W VHTN | 電源 | | ○諸特性 |
| 出力 | 段調光 | 温度 | +25°C | 光源 |
| モード | 定格 | | | LED |
| オプション1 | EL-XGA001B | | | 最大 取付 間隔 |
| オプション2 | | | | 高さ |
| オプション3 | | | | A-A' |
| オプション4 | | | | B-B' |
| オプション5 | | | | 器具効率 |
| | | | | 上方光束 |
| | | | | 下方光束 |
| | | | | 計 |
| | | | | 保守率 |




○配光曲線図 (cd/1000lm)

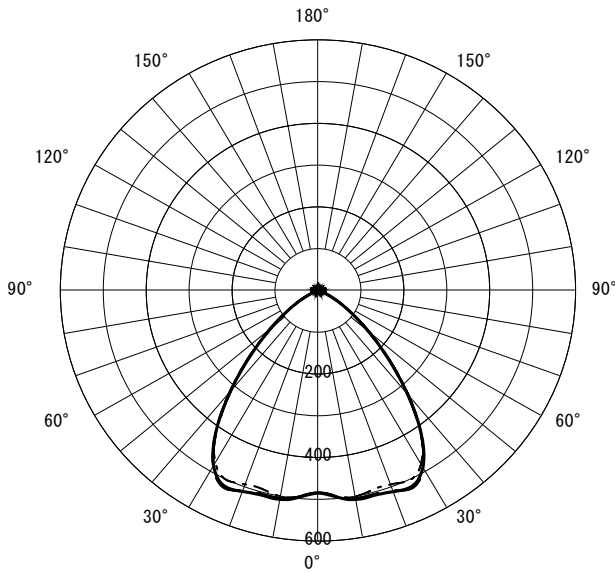

○直射水平面照度

(全光束 : 15700 × 1 = 15700lm/台)

照度 (lx) — H4.00m --- H6.00m - - - H8.00m - · - · H10.00m (保守率 : 1.00)

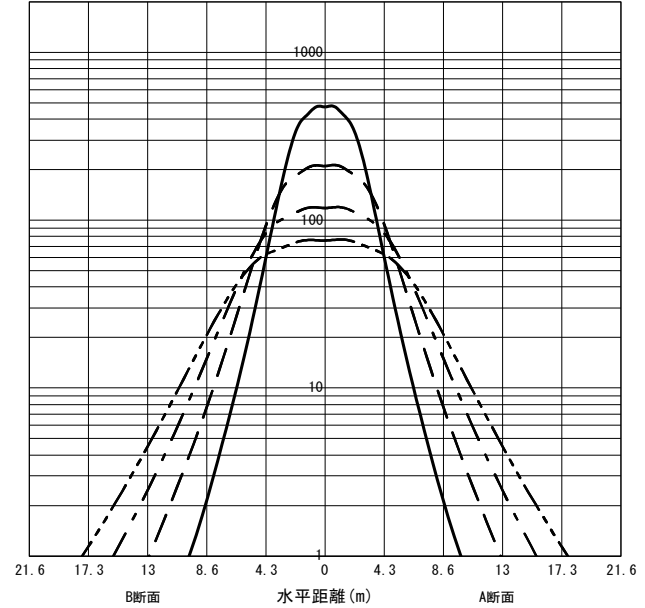

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|---|
| 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | | | | | 30 | | | | | | | | 20 | 0 | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 74 | 68 | 61 | 58 | 54 | 52 | 49 | 48 | 72 | 67 | 61 | 58 | 53 | 52 | 48 | 48 | 69 | 65 | 59 | 57 | 53 | 51 | 48 | 48 | 67 | 63 | 58 | 56 | 52 | 51 | 48 | 47 | 47 | 46 | | | | | | | | |
| 0.80 | 86 | 78 | 74 | 69 | 66 | 64 | 61 | 59 | 84 | 77 | 73 | 69 | 66 | 63 | 60 | 59 | 80 | 75 | 71 | 68 | 65 | 63 | 60 | 59 | 77 | 73 | 69 | 67 | 64 | 62 | 59 | 59 | 59 | 57 | | | | | | | | |
| 1.00 | 94 | 84 | 83 | 77 | 75 | 71 | 69 | 67 | 91 | 83 | 81 | 76 | 74 | 71 | 69 | 67 | 87 | 81 | 79 | 75 | 73 | 70 | 68 | 66 | 83 | 79 | 76 | 73 | 71 | 69 | 67 | 66 | 66 | 64 | | | | | | | | |
| 1.25 | 101 | 89 | 90 | 83 | 83 | 78 | 77 | 74 | 98 | 88 | 88 | 82 | 82 | 77 | 77 | 73 | 93 | 86 | 85 | 80 | 80 | 76 | 75 | 73 | 89 | 84 | 83 | 79 | 78 | 75 | 74 | 72 | 72 | 71 | | | | | | | | |
| 1.50 | 105 | 93 | 95 | 87 | 88 | 82 | 83 | 78 | 102 | 91 | 93 | 86 | 87 | 81 | 82 | 78 | 97 | 89 | 90 | 84 | 84 | 80 | 80 | 77 | 92 | 87 | 87 | 83 | 82 | 79 | 78 | 77 | 76 | 75 | | | | | | | | |
| 2.00 | 111 | 97 | 103 | 92 | 96 | 88 | 91 | 85 | 108 | 95 | 100 | 91 | 95 | 87 | 90 | 84 | 102 | 93 | 96 | 89 | 91 | 86 | 87 | 83 | 96 | 91 | 92 | 88 | 88 | 85 | 85 | 83 | 82 | 80 | | | | | | | | |
| 2.50 | 115 | 99 | 108 | 95 | 102 | 92 | 97 | 89 | 111 | 98 | 105 | 94 | 100 | 91 | 95 | 88 | 105 | 95 | 100 | 92 | 96 | 90 | 92 | 87 | 99 | 93 | 95 | 91 | 92 | 88 | 89 | 86 | 86 | 84 | | | | | | | | |
| 3.00 | 117 | 101 | 111 | 97 | 106 | 94 | 101 | 92 | 114 | 99 | 108 | 96 | 103 | 94 | 99 | 91 | 107 | 97 | 103 | 94 | 99 | 92 | 96 | 90 | 101 | 95 | 98 | 93 | 95 | 91 | 92 | 89 | 88 | 87 | | | | | | | | |
| 4.00 | 121 | 103 | 116 | 100 | 111 | 98 | 107 | 96 | 117 | 102 | 112 | 99 | 108 | 97 | 105 | 95 | 109 | 99 | 106 | 97 | 103 | 95 | 100 | 93 | 103 | 97 | 101 | 95 | 98 | 94 | 96 | 92 | 91 | 90 | | | | | | | | |
| 5.00 | 123 | 104 | 119 | 102 | 115 | 100 | 111 | 98 | 119 | 103 | 115 | 101 | 112 | 99 | 109 | 97 | 111 | 100 | 108 | 99 | 106 | 97 | 103 | 96 | 104 | 98 | 102 | 97 | 100 | 95 | 99 | 94 | 93 | 92 | | | | | | | | |
| 7.00 | 125 | 105 | 122 | 104 | 119 | 102 | 116 | 101 | 121 | 104 | 118 | 103 | 115 | 101 | 113 | 100 | 113 | 102 | 111 | 100 | 109 | 99 | 107 | 98 | 106 | 99 | 104 | 98 | 103 | 98 | 102 | 97 | 96 | 94 | | | | | | | | |
| 10.00 | 127 | 106 | 125 | 105 | 122 | 104 | 120 | 103 | 123 | 105 | 120 | 104 | 119 | 103 | 117 | 102 | 114 | 103 | 113 | 102 | 111 | 101 | 110 | 100 | 107 | 101 | 106 | 100 | 105 | 99 | 104 | 98 | 98 | 96 | | | | | | | | |

JIS C 8030:2014

三菱電機照明株式会社