


	EL-GT15200N/W-G
	+25°C
	AHTN




○配光曲線図 (cd/1000lm)

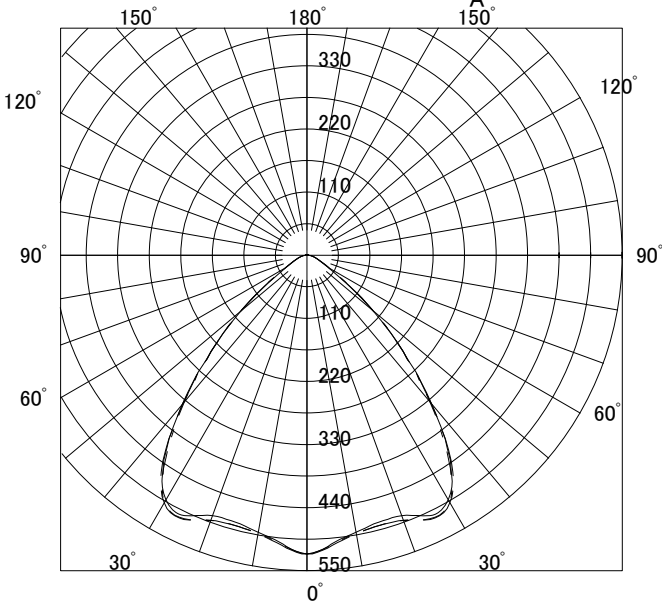

○諸特性

光源		LED15800lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.00m	2.67m	3.34m	4.01m	
	B-B	2.01m	2.69m	3.36m	4.03m	
器具効率	上方光束	下方光束		計		
	0.7%	99.3%		100.0%		
保守率	良い	0.830	普通	0.800	悪い	0.760

○直射水平面照度

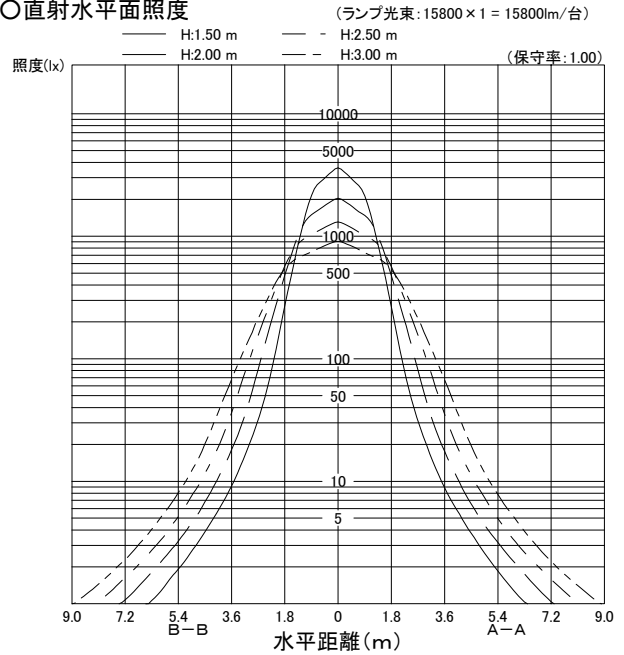

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	55	76	85	93	101	105	111	115	117	121	123	125	127
		10	52	70	77	84	90	92	96	99	101	103	104	105	106
	50	30	43	64	73	82	91	95	102	108	111	115	118	122	124
		10	42	61	68	76	83	86	91	95	97	100	102	104	105
70	30	30	37	57	65	74	83	88	96	102	106	111	114	119	122
		10	36	55	62	70	78	81	87	92	94	97	100	102	104
	10	30	32	51	58	66	74	78	84	89	91	95	98	100	103
		10	32	51	58	66	74	77	83	88	91	94	97	100	102
50	30	30	42	62	69	78	86	89	95	100	102	106	108	110	112
		10	41	59	66	74	81	84	89	92	94	97	98	100	101
	10	30	36	56	63	72	80	84	90	96	99	102	105	108	111
		10	36	54	61	69	77	80	85	90	92	95	97	99	101
30	30	36	55	62	70	78	81	87	92	94	98	100	102	104	
	10	35	54	61	68	76	79	84	88	90	93	95	97	99	
0	0	0	30	49	55	63	71	74	80	84	86	89	91	93	95