


| | | | | |
|--------|--------------------|----|--|------|
| 形名 | EL-GT15512N/W AHTN | 電源 | | ○諸特性 |
| 出力 | 段調光 | 温度 | | |
| モード | 定格 | | | |
| オプション1 | EL-XB003 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|-------|-------|--------|-------|----|-------|
| 光源 | | LED | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.2 H | | | | | |
| | B-B' | 1.2 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 9.2% | 91.4% | 100.6% | | | |
| 保守率 | | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

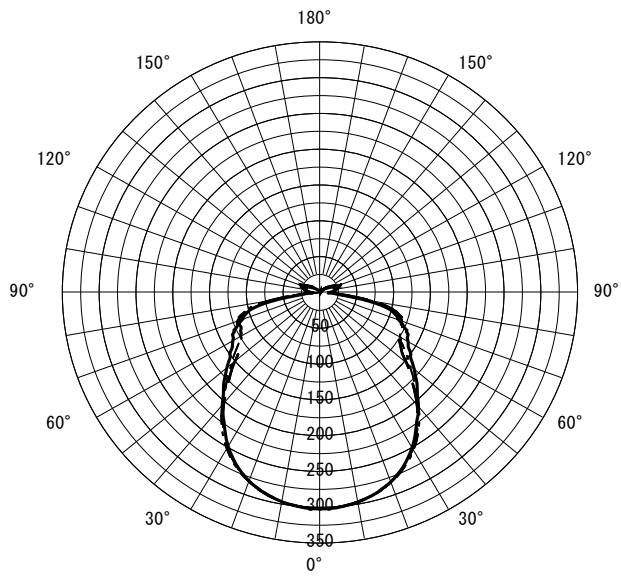

○直射水平面照度 (全光束: 13700 × 1 = 13700lm/台)

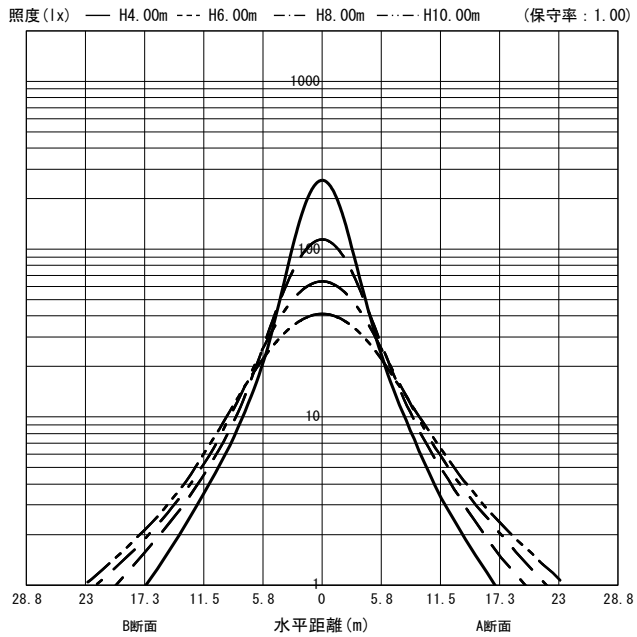

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|-----|-----|-----|-----|----|-----|----|-----|-----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | | | |
| 室指数 | 作業面照度率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 60 | 55 | 45 | 43 | 36 | 35 | 30 | 30 | 58 | 54 | 44 | 42 | 36 | 35 | 30 | 30 | 54 | 50 | 42 | 40 | 35 | 34 | 29 | 29 | 50 | 47 | 40 | 39 | 33 | 33 | 29 | 28 | 28 | 26 |
| 0.80 | 71 | 65 | 56 | 53 | 47 | 45 | 40 | 39 | 68 | 63 | 55 | 52 | 46 | 44 | 40 | 39 | 63 | 59 | 52 | 50 | 44 | 43 | 38 | 38 | 59 | 55 | 49 | 47 | 42 | 41 | 37 | 37 | 36 | 34 |
| 1.00 | 79 | 71 | 65 | 60 | 55 | 52 | 47 | 46 | 76 | 69 | 63 | 58 | 53 | 51 | 47 | 45 | 70 | 65 | 59 | 56 | 51 | 49 | 45 | 44 | 64 | 61 | 55 | 53 | 49 | 48 | 44 | 43 | 42 | 40 |
| 1.25 | 86 | 77 | 73 | 66 | 63 | 59 | 55 | 53 | 83 | 74 | 70 | 65 | 61 | 58 | 54 | 52 | 76 | 70 | 66 | 62 | 58 | 56 | 52 | 51 | 70 | 66 | 62 | 59 | 55 | 54 | 50 | 49 | 49 | 46 |
| 1.50 | 92 | 81 | 79 | 71 | 69 | 64 | 62 | 58 | 88 | 78 | 76 | 70 | 67 | 63 | 60 | 57 | 80 | 74 | 71 | 66 | 64 | 61 | 58 | 56 | 74 | 69 | 66 | 63 | 60 | 58 | 55 | 54 | 53 | 50 |
| 2.00 | 99 | 86 | 88 | 78 | 79 | 72 | 72 | 66 | 95 | 84 | 85 | 77 | 76 | 70 | 70 | 65 | 87 | 79 | 79 | 73 | 72 | 68 | 66 | 63 | 80 | 75 | 73 | 70 | 68 | 65 | 63 | 61 | 60 | 57 |
| 2.50 | 104 | 90 | 94 | 83 | 86 | 77 | 79 | 72 | 100 | 88 | 91 | 81 | 83 | 76 | 77 | 71 | 91 | 83 | 84 | 78 | 78 | 73 | 73 | 69 | 83 | 78 | 78 | 74 | 73 | 70 | 69 | 67 | 66 | 62 |
| 3.00 | 108 | 93 | 99 | 87 | 91 | 81 | 85 | 77 | 103 | 90 | 95 | 85 | 88 | 80 | 82 | 75 | 94 | 86 | 88 | 81 | 82 | 77 | 78 | 73 | 86 | 81 | 81 | 77 | 77 | 74 | 73 | 71 | 69 | 66 |
| 4.00 | 113 | 96 | 105 | 91 | 99 | 87 | 93 | 83 | 108 | 94 | 101 | 89 | 95 | 85 | 90 | 82 | 98 | 89 | 93 | 85 | 89 | 82 | 85 | 79 | 90 | 85 | 86 | 82 | 83 | 79 | 79 | 76 | 75 | 71 |
| 5.00 | 116 | 98 | 110 | 94 | 104 | 90 | 99 | 87 | 111 | 96 | 105 | 92 | 100 | 89 | 96 | 86 | 101 | 91 | 97 | 88 | 93 | 85 | 89 | 83 | 93 | 87 | 89 | 84 | 86 | 82 | 83 | 80 | 78 | 75 |
| 7.00 | 120 | 101 | 115 | 98 | 110 | 95 | 106 | 92 | 114 | 98 | 110 | 96 | 106 | 93 | 102 | 90 | 104 | 94 | 101 | 91 | 98 | 89 | 95 | 87 | 95 | 90 | 93 | 88 | 91 | 86 | 88 | 84 | 83 | 79 |
| 10.00 | 123 | 103 | 119 | 100 | 116 | 98 | 112 | 96 | 117 | 100 | 114 | 98 | 111 | 96 | 108 | 94 | 107 | 96 | 104 | 94 | 102 | 93 | 100 | 91 | 98 | 92 | 96 | 90 | 94 | 89 | 92 | 88 | 86 | 82 |

JIS C 8030:2014

三菱電機照明株式会社