


	EL-GT20100N/AM
	EL-XB001
	AHJ




○配光曲線図 (cd/1000lm)

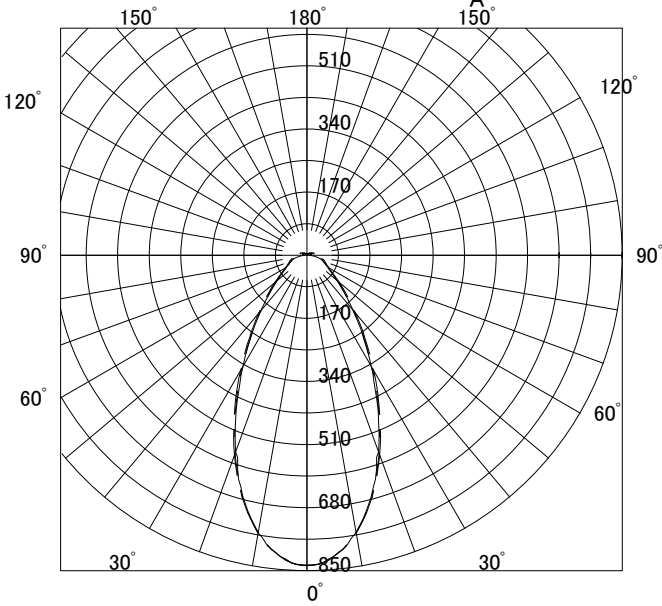

○諸特性

光源		LED17660lm				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	3.20m	4.80m	6.40m	8.01m	
	B-B	3.25m	4.88m	6.50m	8.13m	
器具効率	上方光束	下方光束		計		
	6.0%	94.1%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

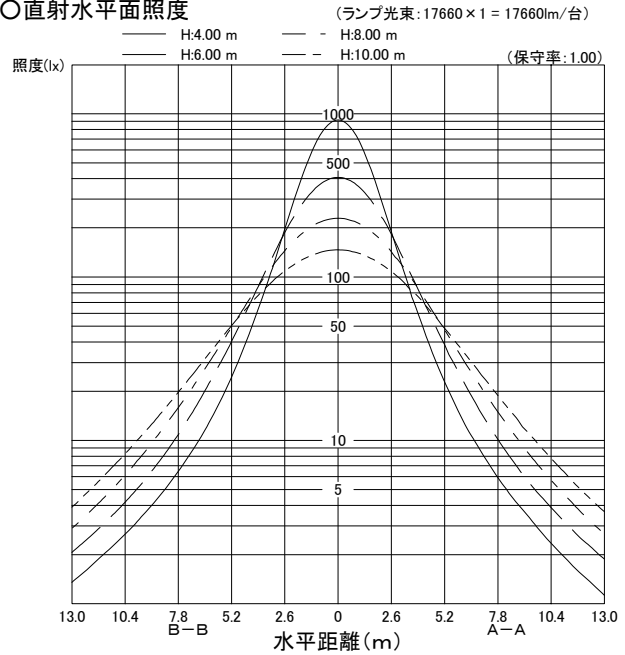

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	53	70	81	88	95	100	106	110	113	117	120	123	125
		10	50	65	73	79	85	88	92	95	97	100	101	103	104
	50	30	41	57	68	76	84	89	97	102	106	111	115	119	122
		10	40	55	64	70	77	81	87	90	93	96	98	101	103
70	30	30	34	50	60	68	75	81	89	95	100	106	110	115	120
		10	34	48	57	64	71	75	82	86	89	93	96	99	102
	10	10	30	44	53	59	66	71	77	82	86	90	93	97	100
	70	30	52	68	78	85	92	96	102	106	109	113	115	118	120
50		10	49	63	72	78	83	86	91	93	95	98	99	101	103
	50	30	40	56	67	74	81	87	94	99	102	107	110	114	117
		10	39	54	63	69	75	80	85	89	91	95	97	99	101
	30	30	34	49	59	67	74	79	87	93	97	103	106	111	115
30		10	33	48	57	64	70	74	81	85	88	92	94	98	100
	10	10	30	43	52	59	66	70	77	81	85	89	92	96	99
	50	30	39	54	64	71	78	82	89	93	96	100	103	106	108
		10	38	52	61	67	73	77	82	86	88	92	94	96	98
0	30	30	33	48	58	64	71	76	83	88	92	96	100	104	107
		10	33	47	56	62	68	73	78	83	85	89	92	95	97
	10	10	29	43	52	58	64	69	75	80	83	87	90	93	96
0	30	30	33	47	56	62	69	73	79	84	87	91	94	97	99
		10	32	46	55	61	67	71	77	80	83	87	89	92	94
0	0	0	27	40	49	55	61	65	70	74	77	81	83	86	89