
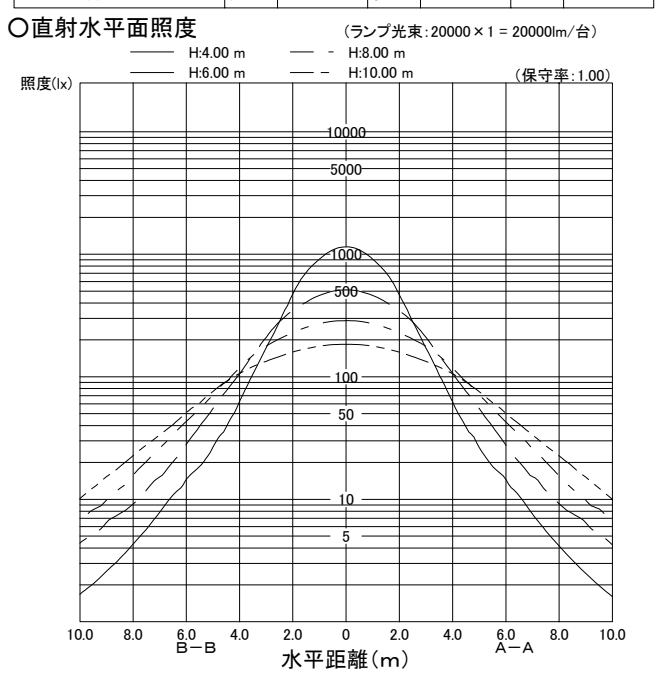


○諸特性

光源		LED20000lm				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	3.56m	5.34m	7.12m	8.90m	
	B-B	3.58m	5.38m	7.17m	8.96m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

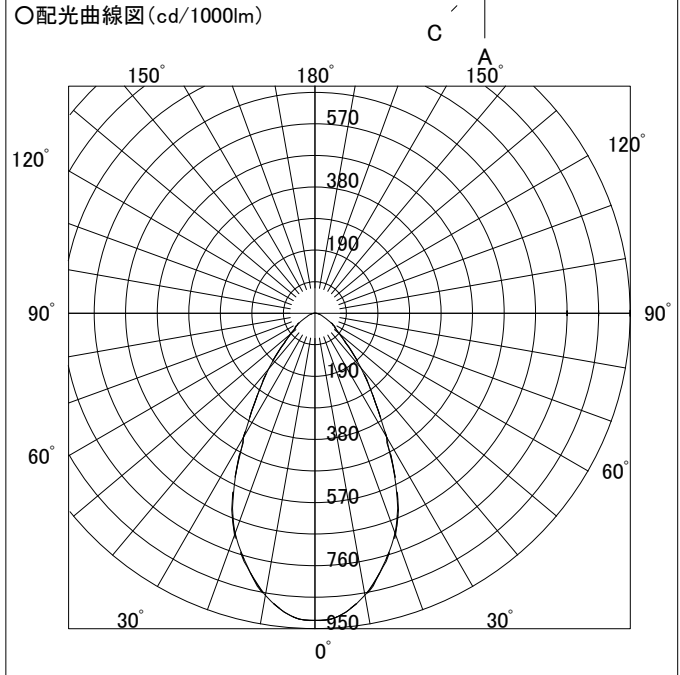

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	57	75	86	94	100	105	111	115	117	121	123	125	127
		10	54	69	78	84	89	92	96	99	101	103	104	106	107
	50	30	45	63	74	82	90	95	102	107	111	115	119	122	125
		10	44	60	70	76	82	86	91	95	97	100	102	104	106
70	30	30	39	56	67	75	82	88	96	101	105	111	115	119	123
		10	38	54	64	71	77	82	87	91	94	98	100	102	105
	50	30	56	74	84	91	98	102	107	111	114	117	119	121	123
		10	53	68	77	83	88	91	95	98	99	102	103	104	105
50	30	30	45	62	73	81	88	93	100	105	108	112	115	118	121
		10	44	60	69	76	82	85	91	94	96	99	101	103	104
	50	30	39	55	66	74	81	86	94	99	103	108	111	116	119
		10	38	54	64	70	77	81	87	91	93	97	99	102	104
30	30	30	44	61	71	78	85	90	96	100	102	106	108	111	113
		10	43	59	68	74	80	84	89	92	94	97	99	101	102
	30	30	38	55	65	72	79	84	91	95	98	103	106	109	112
		10	38	53	63	70	76	80	86	89	92	95	97	100	102
0	0	30	38	54	64	71	77	82	88	92	94	98	100	103	105
		10	37	53	63	69	75	79	84	88	90	94	96	98	100
0	0	0	33	48	58	64	70	74	80	84	86	90	92	94	96