



EL-GT20100N/W

EL-XGA001

AHJ



○配光曲線図 (cd/1000lm)

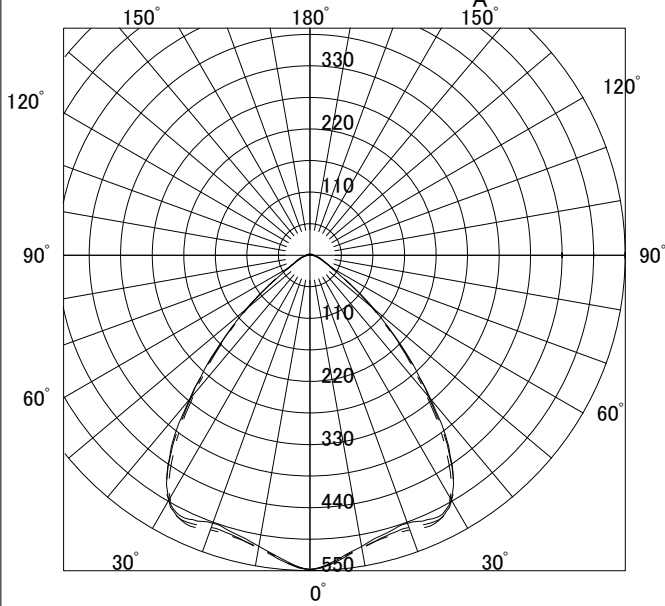


○諸特性

光源		LED20640lm				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	5.15m	7.72m	10.31m	12.87m	
	B-B	5.15m	7.72m	10.30m	12.87m	
器具効率	上方光束	下方光束		計		
	1.6%	98.4%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

(ランプ光束: 20640 × 1 = 20640lm/台)

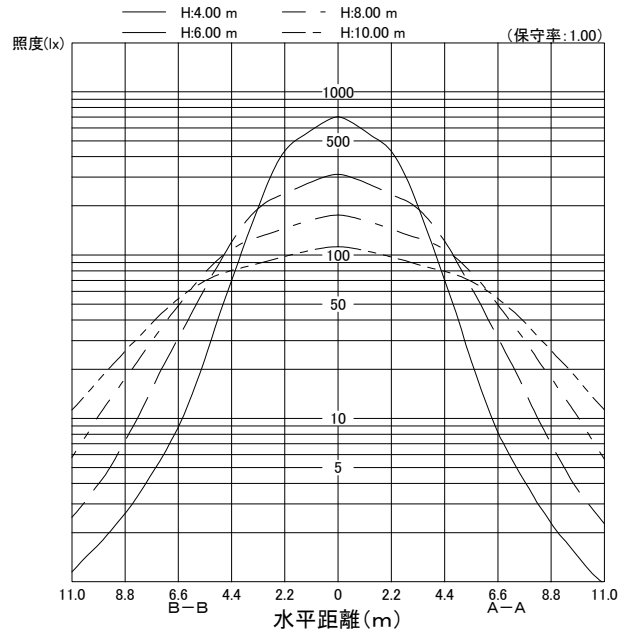

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	56	76	85	93	101	105	111	115	117	120	123	125	127
		10	52	70	77	84	90	92	96	99	101	102	104	105	106
	50	30	44	64	73	82	91	95	102	108	111	115	118	122	124
		10	42	61	68	76	83	86	91	95	97	100	101	103	105
70	70	30	55	75	83	91	98	101	107	111	113	116	118	120	122
		10	52	69	76	82	88	91	95	98	99	101	102	104	105
	50	30	43	64	72	80	89	93	100	105	108	112	114	117	120
		10	42	61	68	75	82	85	90	94	96	99	100	102	104
50	70	30	37	57	64	73	82	86	94	99	103	108	111	115	118
		10	36	55	62	70	78	81	86	91	93	96	98	101	102
	50	30	33	51	58	66	74	77	83	88	91	94	97	99	101
		10	33	51	58	66	74	77	83	88	91	94	97	99	101
30	70	30	42	62	70	78	86	89	95	99	102	105	107	110	112
		10	41	60	66	74	81	83	88	92	94	96	98	100	101
	50	30	37	56	63	72	80	84	90	95	98	102	105	108	110
		10	36	55	61	69	77	80	85	89	91	94	96	99	100
0	70	30	32	51	58	65	73	76	82	87	89	93	95	97	99
		10	32	51	57	65	73	76	81	86	88	91	93	96	97
	50	30	36	55	62	70	78	81	87	91	94	97	99	102	104
		10	36	54	61	68	76	78	84	88	90	93	94	96	98
30	30	32	51	57	65	73	76	81	86	88	91	93	96	97	
	10	32	51	57	65	73	76	81	86	88	91	93	96	97	
0	0	30	31	49	55	63	71	74	79	83	85	88	90	93	94
		10	31	49	55	63	71	74	79	83	85	88	90	93	94