



○諸特性

光源		LED21300lm				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	5.35m	8.02m	10.68m	13.34m	
	B-B	5.38m	8.07m	10.74m	13.40m	
器具効率	上方光束	下方光束		計		
	0.7%	99.3%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

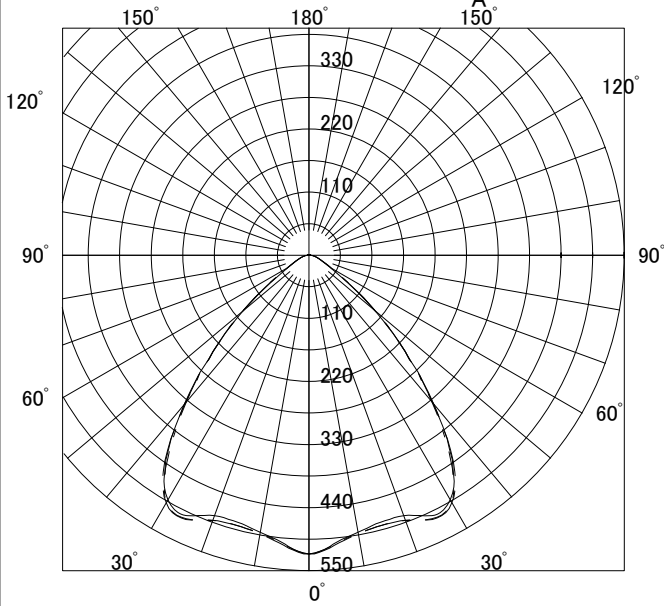

○直射水平面照度

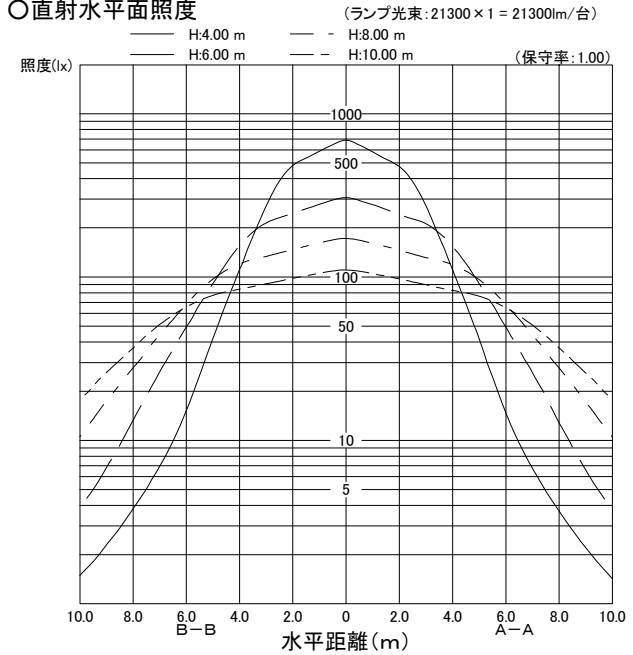

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	55	76	85	93	101	105	111	115	117	121	123	125	127
		10	52	70	77	84	90	92	96	99	101	103	104	105	106
	50	30	43	64	73	82	91	95	102	108	111	115	118	122	124
		10	42	61	68	76	83	86	91	95	97	100	102	104	105
70	30	30	37	57	65	74	83	88	96	102	106	111	114	119	122
		10	36	55	62	70	78	81	87	92	94	97	100	102	104
	50	30	42	63	72	80	89	93	100	105	108	112	115	118	120
		10	42	60	68	75	82	85	90	94	96	99	101	102	104
50	30	30	37	56	64	73	82	86	94	100	103	108	111	115	118
		10	36	55	62	70	78	81	87	91	93	96	99	101	103
	50	30	42	62	69	78	86	89	95	100	102	106	108	110	112
		10	41	59	66	74	81	84	89	92	94	97	98	100	101
30	30	30	36	56	63	72	80	84	90	96	99	102	105	108	111
		10	36	54	61	69	77	80	85	90	92	95	97	99	101
	30	30	36	55	62	70	78	81	87	92	94	98	100	102	104
		10	35	54	61	68	76	79	84	88	90	93	95	97	99
0	0	0	30	49	55	63	71	74	80	84	86	89	91	93	95