


EL-GT20111N/W

EL-XGA001B


AHTN




○諸特性

光源		LED19900lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.01m	2.69m	3.36m	4.03m	
	B-B	1.99m	2.66m	3.33m	3.99m	
器具効率	上方光束	下方光束		計		
	2.8%	97.2%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図(cd/1000lm)

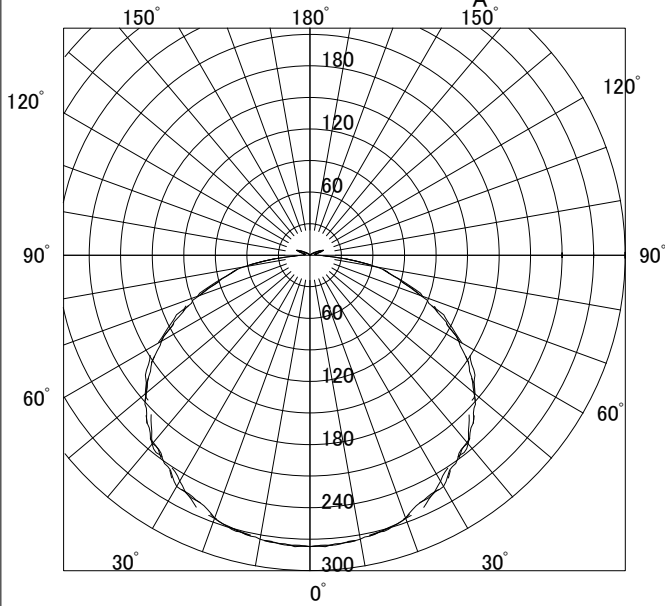

○直射水平面照度

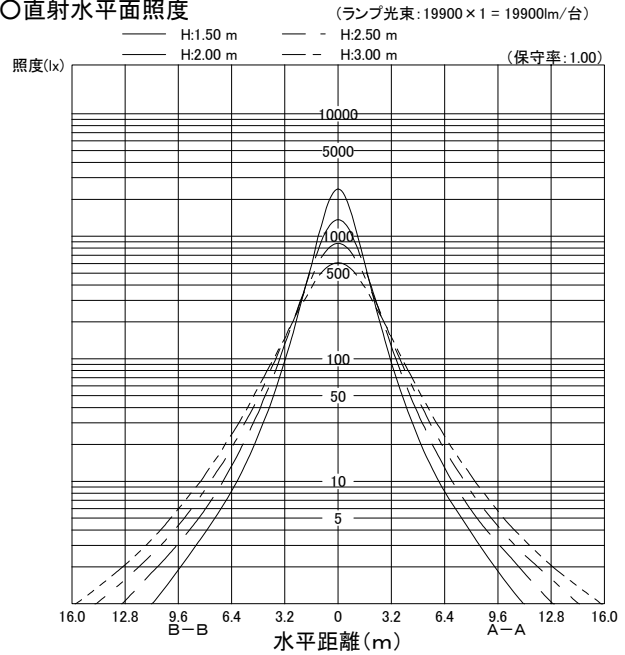

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	59	70	78	87	92	100	106	109	114	117	121	124
		10	40	55	63	70	77	81	87	91	94	97	99	102	104
	50	30	29	44	54	63	72	79	88	95	100	107	111	116	120
		10	28	42	51	59	66	71	79	84	88	92	95	99	101
70	30	30	22	35	44	53	62	69	79	87	92	100	105	111	117
		10	21	34	42	50	59	64	72	78	82	88	91	96	99
	10	30	17	28	36	44	52	58	67	73	78	84	88	93	97
		10	17	28	36	44	52	58	67	73	78	84	88	93	97
50	70	30	42	57	67	75	83	89	96	102	105	110	113	116	119
		10	39	53	61	68	75	79	85	89	92	95	97	100	102
	50	30	29	43	53	62	71	76	86	92	97	103	107	112	116
		10	28	41	50	58	65	70	78	83	86	91	94	97	100
30	30	30	21	35	44	52	61	67	77	85	90	97	102	108	113
		10	21	34	42	50	58	63	71	77	81	87	90	95	98
	10	16	28	36	44	52	57	66	72	77	83	87	92	96	
0	50	30	28	42	50	59	67	72	81	87	91	96	100	104	107
		10	27	40	48	56	63	68	75	80	83	88	91	94	97
	30	30	21	34	42	50	59	65	74	80	85	91	96	101	105
10		21	33	41	49	57	62	70	75	79	84	88	92	95	
30	30	30	20	33	41	49	57	62	71	77	81	86	90	95	98
		10	20	32	40	48	55	60	68	74	77	82	86	90	93
10	10	30	16	28	35	43	51	56	64	70	74	80	83	88	92
		10	16	28	35	43	51	56	64	70	74	80	83	88	92
0	0	0	14	26	33	40	48	53	61	67	71	76	80	84	88