



	EL-GT30110L/W
	EL-XB001B
	AHTN



○配光曲線図 (cd/1000lm)

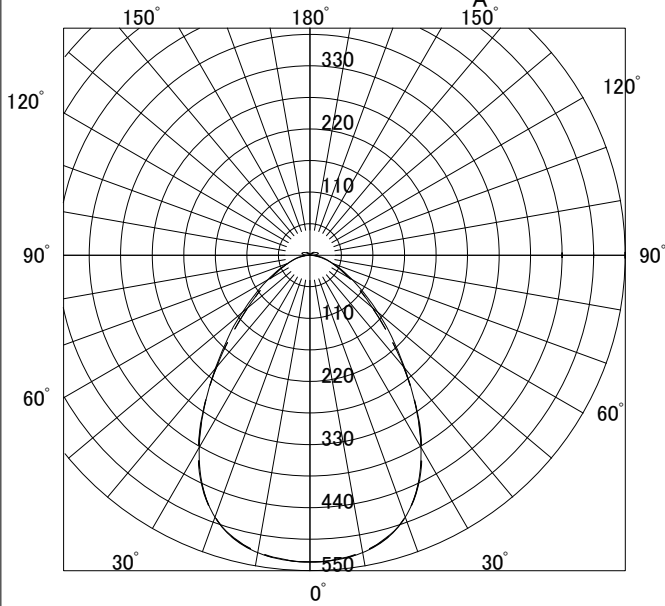


○諸特性

光源		LED23400lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.66m	2.21m	2.77m	3.32m	
	B-B	1.67m	2.22m	2.78m	3.34m	
器具効率	上方光束	下方光束		計		
	5.4%	94.6%		100.0%		
保守率	良い	0.760	普通	0.720	悪い	0.640

○直射水平面照度

(ランプ光束: 23400 × 1 = 23400lm/台)

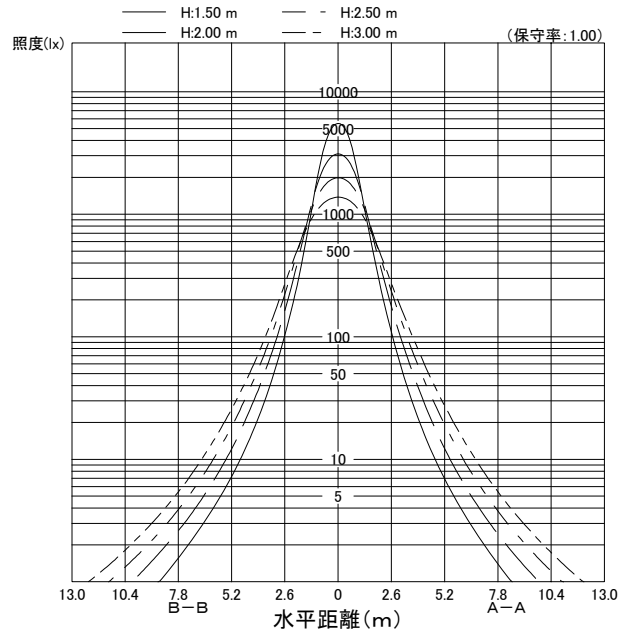

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	53	72	81	89	97	101	107	112	114	118	121	123	125
		10	49	66	73	80	86	89	93	96	98	101	102	104	105
	50	30	40	59	68	77	86	90	98	104	107	112	116	120	123
		10	39	56	64	71	78	82	88	92	94	97	99	102	103
70	30	30	33	52	60	68	78	82	91	97	101	107	111	116	120
		10	33	50	57	65	73	76	83	88	91	94	97	100	102
	10	30	29	46	52	60	68	72	79	84	87	92	95	98	101
		10	29	46	52	60	68	72	79	84	87	92	95	98	101
50	70	30	51	70	78	86	93	97	103	108	110	113	116	118	120
		10	48	65	72	78	84	87	91	95	96	99	100	102	103
	50	30	40	58	66	75	83	88	95	101	104	108	112	115	118
		10	38	56	63	70	77	81	86	90	93	96	98	100	102
30	30	30	33	51	59	67	76	81	89	95	99	104	108	112	116
		10	33	50	57	64	72	76	82	87	89	93	96	98	101
	10	30	29	46	52	60	68	71	78	83	86	91	94	97	99
		10	29	46	52	60	68	71	78	83	86	91	94	97	99
0	50	30	38	56	64	72	80	83	90	95	98	101	104	107	109
		10	37	54	61	68	75	78	84	88	90	93	95	97	99
	30	30	33	50	57	65	74	78	85	90	93	98	101	105	107
		10	32	49	56	63	71	74	80	84	87	91	93	96	98
10	30	28	45	51	59	67	70	77	82	85	88	91	94	97	
	10	28	45	51	59	67	70	77	82	85	88	91	94	97	
30	30	32	49	56	63	71	75	81	86	89	92	95	98	100	
	10	31	48	54	62	69	72	78	82	85	88	90	93	95	
10	30	28	45	51	58	66	69	75	80	83	86	89	92	94	
	10	28	45	51	58	66	69	75	80	83	86	89	92	94	
0	0	0	26	43	48	56	63	66	72	77	79	83	85	88	90