



EL-GT40227N/W

+40°C

AHTN



○配光曲線図 (cd/1000lm)

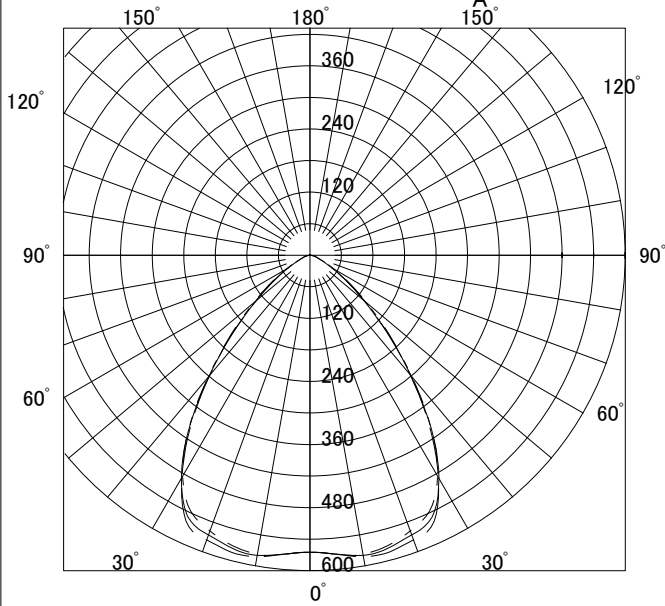


○諸特性

光源		LED41100lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.86m	2.48m	3.10m	3.72m	
	B-B	1.85m	2.46m	3.08m	3.70m	
器具効率	上方光束	下方光束		計		
	0.1%	99.9%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

(ランプ光束: 41100 × 1 = 41100lm/台)

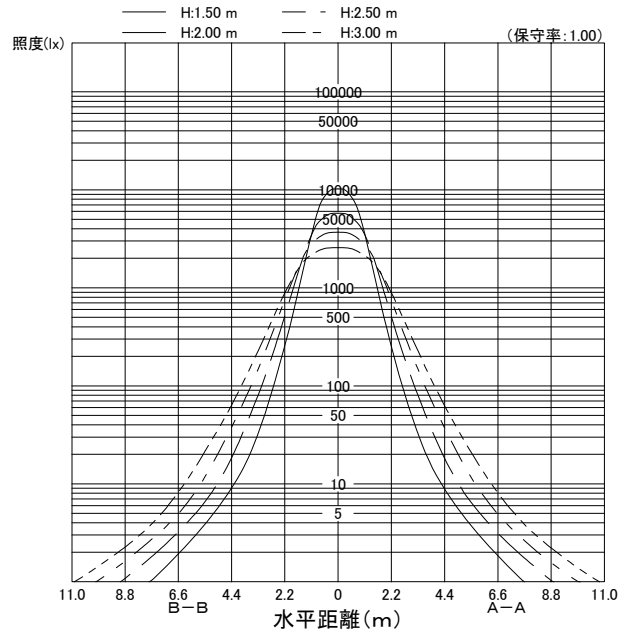

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	57	78	86	94	102	106	111	116	118	121	123	126	127
		10	53	71	78	85	91	93	97	100	101	103	104	106	107
	50	30	45	66	74	83	92	96	103	109	112	116	119	122	125
		10	43	63	69	77	84	87	92	96	98	100	102	104	105
70	30	30	38	59	66	75	85	89	97	103	106	112	115	119	123
		10	37	57	64	72	80	83	88	93	95	98	100	103	104
	10	30	34	53	59	67	76	79	85	90	92	96	99	101	103
		10	34	53	59	67	76	79	85	90	92	96	99	101	103
50	70	30	56	76	84	92	99	103	108	112	114	117	119	121	123
		10	52	70	77	83	89	92	96	99	100	102	103	104	105
	50	30	44	65	73	82	90	94	101	106	109	113	115	118	121
		10	43	62	69	76	84	86	91	95	97	99	101	103	104
30	30	30	38	58	66	75	84	88	95	101	104	109	112	116	119
		10	37	57	63	71	79	82	88	92	94	97	99	102	103
	10	30	34	53	59	67	76	79	85	89	92	95	98	100	102
		10	34	53	59	67	76	79	85	89	92	95	98	100	102
0	30	30	44	64	71	79	87	90	96	101	103	107	109	111	113
		10	42	61	68	75	82	85	90	93	95	98	99	101	102
	30	30	38	58	65	73	82	85	92	97	100	103	106	109	112
		10	37	56	63	70	78	81	86	91	93	96	98	100	101
0	30	30	34	53	59	67	75	78	84	88	91	94	96	99	101
		10	34	53	59	67	75	78	84	88	91	94	96	99	101
	30	30	37	57	64	72	80	83	89	93	95	99	101	103	105
		10	37	56	62	70	77	80	85	89	91	94	96	98	100
0	0	30	33	53	59	67	75	77	83	87	90	93	95	97	99
		10	33	53	59	67	75	77	83	87	90	93	95	97	99
0	0	30	32	51	57	65	73	75	81	85	87	90	92	94	96
		10	32	51	57	65	73	75	81	85	87	90	92	94	96