



○諸特性

光源		LED3740lm M				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.87m	2.48m	3.09m	3.71m	
	B-B	1.89m	2.43m	2.98m	3.46m	
器具効率	上方光束	下方光束		計		
	3.4%	96.6%		100.0%		
保守率	良い	0.810	普通	0.790	悪い	0.750

○配光曲線図 (cd/1000lm)

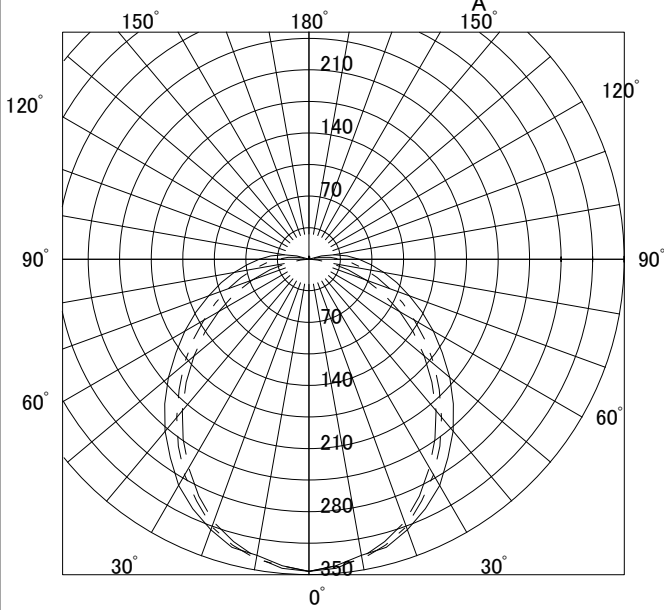

○直射水平面照度

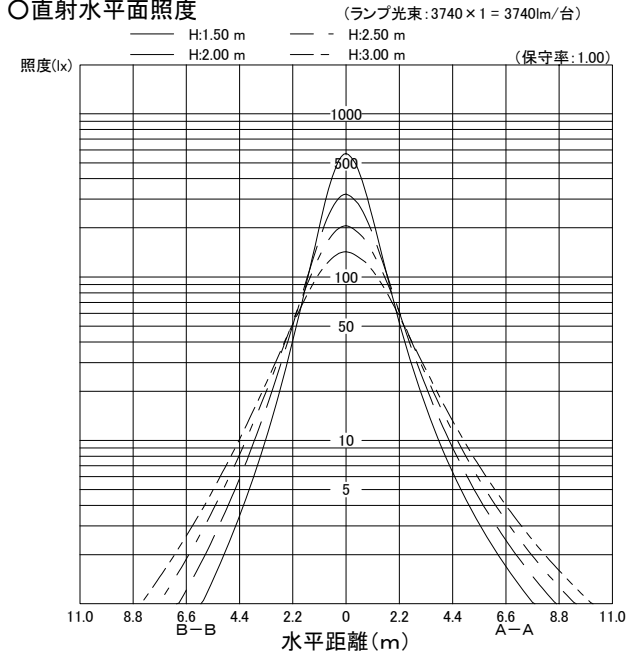

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	45	62	72	80	88	93	101	106	110	114	117	121	123
		10	42	57	65	72	79	82	88	92	94	97	99	102	103
	50	30	32	47	57	66	75	81	90	96	101	107	111	116	120
		10	31	45	53	61	69	73	80	85	88	92	95	98	101
70	70	30	44	60	69	77	85	90	97	102	105	110	112	116	118
		10	41	56	64	70	77	80	86	90	92	95	97	100	102
	50	30	31	47	56	64	73	78	87	93	97	103	107	111	115
		10	30	44	52	60	67	72	79	84	87	91	94	97	99
50	30	30	24	38	47	55	64	69	79	86	90	97	102	107	112
		10	24	37	45	52	60	65	73	78	82	87	90	94	97
	10	10	19	32	39	47	55	60	68	74	78	83	87	92	96
30	30	30	30	45	53	61	69	74	82	87	91	96	100	104	107
		10	29	43	51	58	65	69	76	81	84	88	91	94	96
	10	10	19	32	39	46	54	59	66	72	76	81	85	90	93
0	0	30	23	36	44	52	59	64	72	78	81	86	90	94	98
		10	23	36	43	50	58	62	69	74	78	82	86	89	92
0	0	0	17	29	36	43	50	55	62	68	71	76	80	84	87