
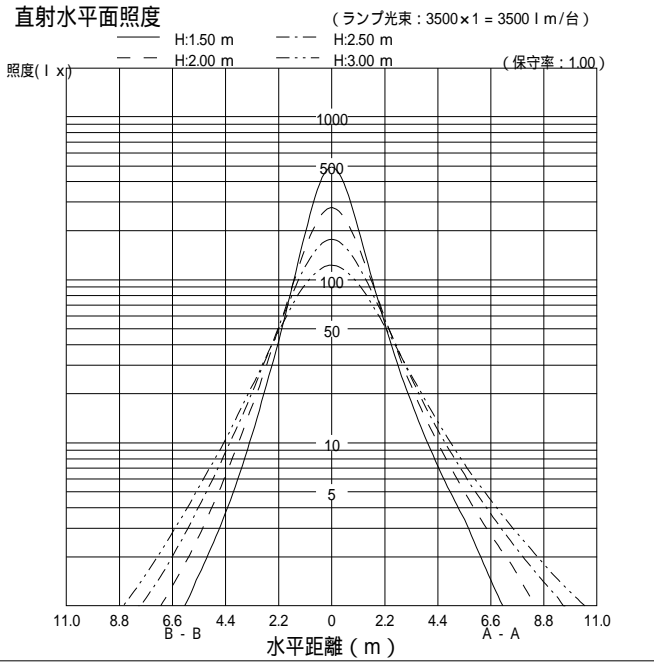


諸特性

光源		LDL40S.N/31/35					
最大取付間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.95m	2.56m	3.18m	3.80m		
	B-B	2.10m	2.62m	3.19m	3.77m		
器具効率		上方光束	下方光束	計			
		0.0%	96.9%	96.9%			
保守率		良い	0.810	普通	0.760	悪い	0.670

配光曲線図 (cd/1000lm)

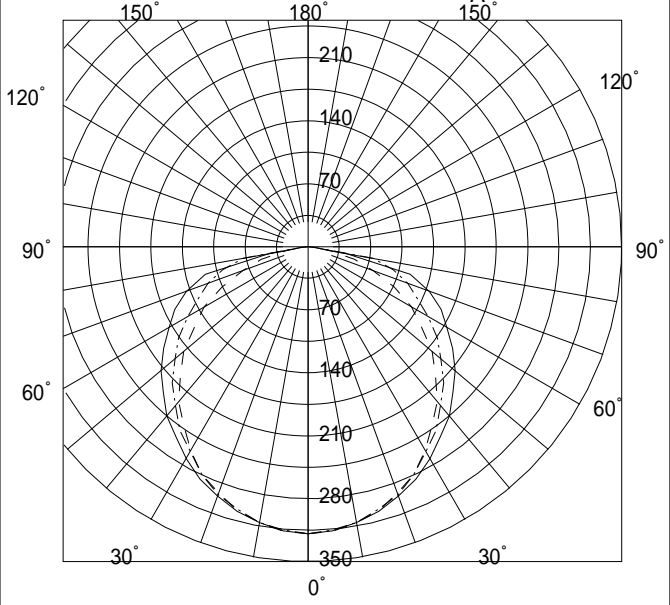

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	59	69	78	86	91	99	104	108	112	115	119	121
		10	41	55	63	70	76	80	86	90	92	95	97	100	101
	50	30	30	45	54	63	72	78	88	94	99	105	109	114	118
		10	29	43	51	59	66	71	78	83	87	91	94	97	100
		30	30	23	36	45	54	63	69	79	86	92	99	104	110
70	70	30	22	35	43	51	59	64	72	78	82	87	91	95	98
		10	18	30	37	45	53	58	67	73	77	83	87	92	96
	50	30	42	58	67	75	83	88	95	100	104	108	111	114	117
		10	40	53	61	68	75	78	84	88	91	94	96	98	100
		30	29	44	53	62	71	76	85	92	96	102	106	110	114
50	70	30	22	36	44	53	62	68	77	84	89	96	101	107	111
		10	22	35	43	50	58	63	71	77	81	86	90	94	97
	50	30	29	43	51	59	68	73	81	87	91	96	99	103	106
		10	28	41	49	56	64	68	75	80	83	88	90	94	96
		30	22	35	42	50	57	62	70	76	79	84	88	92	95
30	30	18	30	37	44	52	57	66	72	76	82	85	90	93	
	30	22	35	42	50	58	63	71	77	81	87	91	95	98	
	10	21	34	42	49	57	61	69	74	78	83	86	90	93	
0	0	0	16	28	35	42	50	54	62	68	72	78	81	86	89