


EL-LFB45001B AHN(25N5)


AHN




○諸特性

光源		LDL40S・N/17/25・N5				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.02m	2.65m	3.31m	3.95m	
	B-B	2.16m	2.69m	3.28m	3.88m	
器具効率	上方光束	下方光束		計		
	0.0%	96.3%		96.3%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

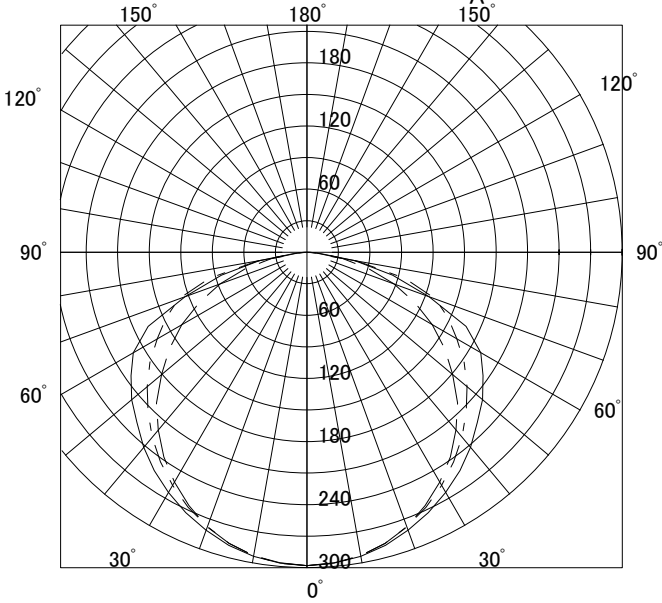

○直射水平面照度

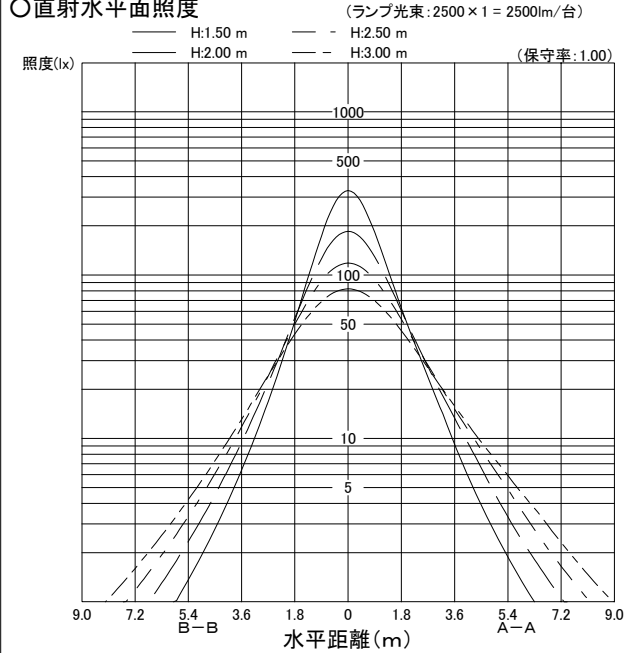

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	42	58	68	77	85	90	98	103	107	112	115	118	121
		10	40	54	62	69	75	79	85	89	92	95	97	99	101
	50	30	29	44	54	62	71	77	87	94	98	105	109	114	117
		10	28	42	50	58	65	70	78	83	86	90	93	97	99
70	30	30	22	35	44	53	62	68	78	86	91	98	103	110	114
		10	21	34	42	50	58	63	71	77	81	87	90	94	97
	10	30	17	29	36	44	52	57	66	72	77	83	87	92	96
		10	17	29	36	44	52	57	66	72	76	82	86	91	95
50	30	30	28	42	50	58	67	72	80	86	90	95	99	103	106
		10	27	40	48	55	63	67	74	80	83	87	90	93	96
	10	30	21	34	42	50	59	64	73	80	85	91	95	100	104
		10	21	33	41	49	57	61	69	75	79	84	87	91	94
30	30	21	34	41	49	57	62	71	77	81	86	90	94	98	
	10	21	33	41	48	56	60	68	74	77	82	86	90	92	
0	0	0	15	27	34	41	49	54	62	68	72	77	81	85	89