


形名	EL-LFB45122B AHN (25N5)	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1	L4342			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-D/17/24-N4					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	86.7%	86.8%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

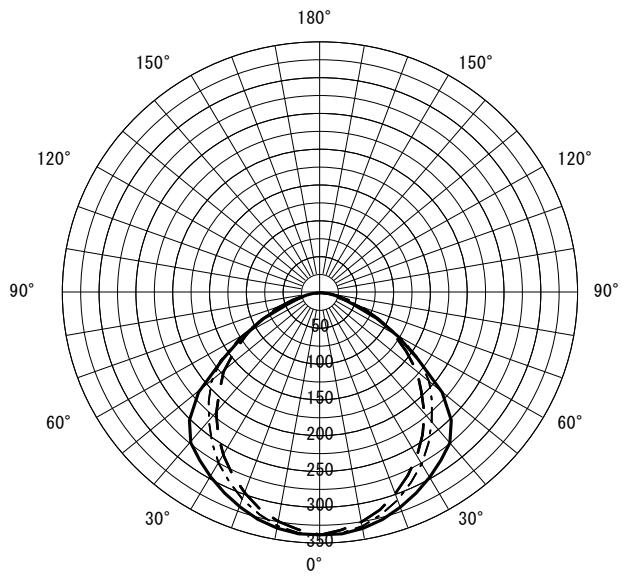

○直射水平面照度 (全光束: 2400 × 2 = 4800lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

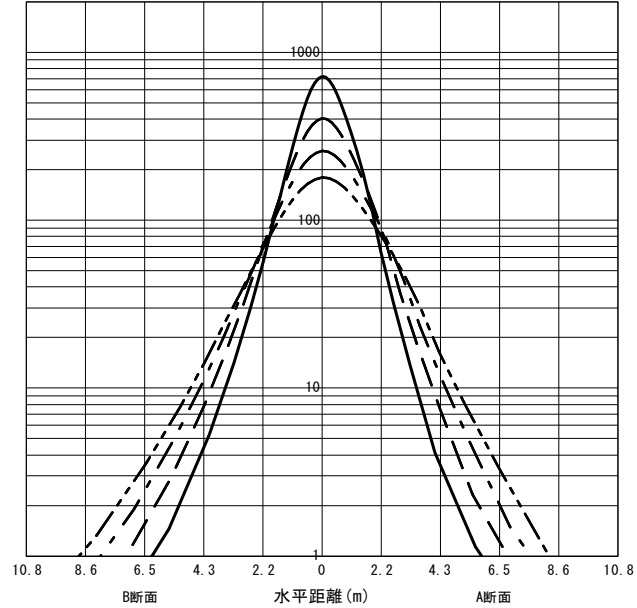

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	56	52	44	41	36	35	31	30	54	51	43	41	36	35	31	30	52	49	42	40	35	34	31	30	49	47	40	39	35	34	30	30	30	30	29							
0.80	67	61	55	51	47	45	41	40	65	59	54	51	46	45	41	40	61	57	52	50	45	44	41	40	58	55	50	48	44	44	40	40	40	40	38							
1.00	74	67	62	58	55	52	49	47	72	65	61	57	54	51	49	47	68	63	59	56	53	51	48	47	64	61	57	55	51	50	47	46	46	46	45							
1.25	81	72	70	64	62	58	56	54	78	70	68	63	61	58	56	54	74	68	66	62	60	57	55	53	70	66	63	60	58	56	54	53	53	53	51							
1.50	85	75	75	68	68	63	62	59	83	74	74	67	67	62	61	58	78	71	70	66	65	61	60	58	73	69	67	64	63	61	59	57	57	57	55							
2.00	92	80	83	74	76	69	71	66	89	78	81	73	75	69	70	65	83	76	77	72	72	68	68	65	78	74	73	70	69	67	66	64	64	64	62							
2.50	96	83	88	78	82	74	77	70	93	81	86	77	80	73	76	70	87	79	81	75	77	72	73	69	82	77	77	73	74	71	70	68	68	68	66							
3.00	99	85	92	80	86	77	81	74	95	83	89	79	84	76	80	73	89	81	84	78	80	75	77	72	84	79	80	76	77	73	74	71	71	71	69							
4.00	102	87	97	84	92	81	88	78	99	86	94	83	90	80	86	78	92	83	88	81	85	79	82	76	87	81	84	79	81	77	79	75	75	75	73							
5.00	105	88	100	86	96	83	92	81	101	87	97	85	93	82	90	80	94	85	91	83	88	81	85	79	88	83	86	81	84	79	82	78	77	76								
7.00	107	90	104	88	100	86	98	85	103	89	100	87	97	85	95	84	96	87	94	85	92	84	90	82	90	85	88	83	87	82	85	81	80	79								
10.00	109	91	107	90	104	89	102	87	105	90	103	89	101	88	99	86	98	88	96	87	95	86	93	85	92	86	90	85	89	84	88	83	83	81								

JIS C 8030:2014

三菱電機照明株式会社