


| | | | | |
|--------|-------------------------|----|--|------|
| 形名 | EL-LFB45122B AHN (25N5) | 電源 | | ○諸特性 |
| 出力 | 固定出力 | 温度 | | |
| モード | | | | |
| オプション1 | L4342 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | |
|----------------|------|--------------------|----------|----------|
| 光源 | | LDL40S-WW/17/23-N4 | | |
| 最大 取付 間隔 | 高さ | H | | |
| | A-A' | 1.3 H | | |
| | B-B' | 1.2 H | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 |
| | | 0.0% | 86.7% | 86.8% |
| 保守率 | | 良い 0.810 | 普通 0.770 | 悪い 0.680 |

○配光曲線図 (cd/1000lm)

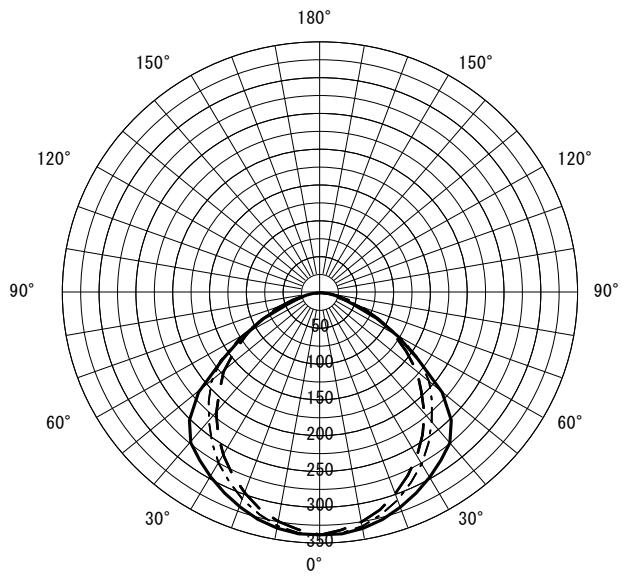

○直射水平面照度 (全光束: 2300 × 2 = 4600lm/台)

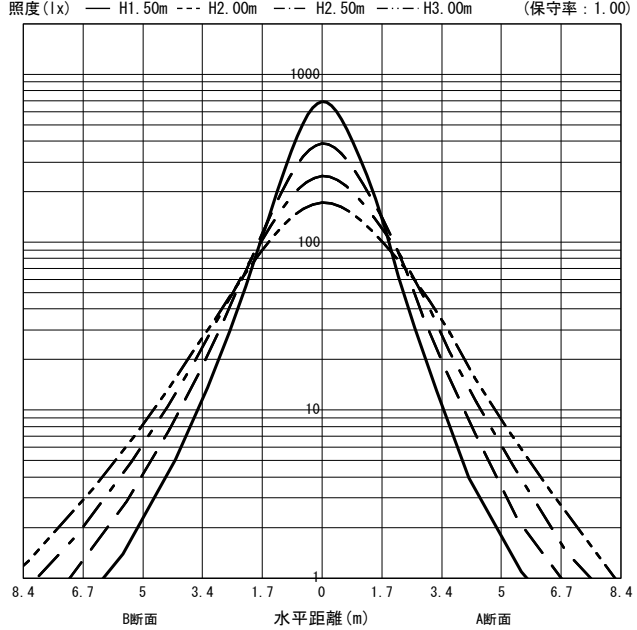

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 天井 | 80 | | | | | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 56 | 52 | 44 | 41 | 36 | 35 | 31 | 30 | 54 | 51 | 43 | 41 | 36 | 35 | 31 | 30 | 52 | 49 | 42 | 40 | 35 | 34 | 31 | 30 | 49 | 47 | 40 | 39 | 35 | 34 | 30 | 30 | 30 | 29 | |
| 0.80 | 67 | 61 | 55 | 51 | 47 | 45 | 41 | 40 | 65 | 59 | 54 | 51 | 46 | 45 | 41 | 40 | 61 | 57 | 52 | 50 | 45 | 44 | 41 | 40 | 58 | 55 | 50 | 48 | 44 | 44 | 40 | 40 | 40 | 38 | |
| 1.00 | 74 | 67 | 62 | 58 | 55 | 52 | 49 | 47 | 72 | 65 | 61 | 57 | 54 | 51 | 49 | 47 | 68 | 63 | 59 | 56 | 53 | 51 | 48 | 47 | 64 | 61 | 57 | 55 | 51 | 50 | 47 | 46 | 46 | 45 | |
| 1.25 | 81 | 72 | 70 | 64 | 62 | 58 | 56 | 54 | 78 | 70 | 68 | 63 | 61 | 58 | 56 | 54 | 74 | 68 | 66 | 62 | 60 | 57 | 55 | 53 | 70 | 66 | 63 | 60 | 58 | 56 | 54 | 53 | 53 | 51 | |
| 1.50 | 85 | 75 | 75 | 68 | 68 | 63 | 62 | 59 | 83 | 74 | 74 | 67 | 67 | 62 | 61 | 58 | 78 | 71 | 70 | 66 | 65 | 61 | 60 | 58 | 73 | 69 | 67 | 64 | 63 | 61 | 59 | 57 | 57 | 55 | |
| 2.00 | 92 | 80 | 83 | 74 | 76 | 69 | 71 | 66 | 89 | 78 | 81 | 73 | 75 | 69 | 70 | 65 | 83 | 76 | 77 | 72 | 72 | 68 | 68 | 65 | 78 | 74 | 73 | 70 | 69 | 67 | 66 | 64 | 64 | 62 | |
| 2.50 | 96 | 83 | 88 | 78 | 82 | 74 | 77 | 70 | 93 | 81 | 86 | 77 | 80 | 73 | 76 | 70 | 87 | 79 | 81 | 75 | 77 | 72 | 73 | 69 | 82 | 77 | 77 | 73 | 74 | 71 | 70 | 68 | 68 | 66 | |
| 3.00 | 99 | 85 | 92 | 80 | 86 | 77 | 81 | 74 | 95 | 83 | 89 | 79 | 84 | 76 | 80 | 73 | 89 | 81 | 84 | 78 | 80 | 75 | 77 | 72 | 84 | 79 | 80 | 76 | 77 | 73 | 74 | 71 | 71 | 69 | |
| 4.00 | 102 | 87 | 97 | 84 | 92 | 81 | 88 | 78 | 99 | 86 | 94 | 83 | 90 | 80 | 86 | 78 | 92 | 83 | 88 | 81 | 85 | 79 | 82 | 76 | 87 | 81 | 84 | 79 | 81 | 77 | 79 | 75 | 75 | 73 | |
| 5.00 | 105 | 88 | 100 | 86 | 96 | 83 | 92 | 81 | 101 | 87 | 97 | 85 | 93 | 82 | 90 | 80 | 94 | 85 | 91 | 83 | 88 | 81 | 85 | 79 | 88 | 83 | 86 | 81 | 84 | 79 | 82 | 78 | 77 | 76 | |
| 7.00 | 107 | 90 | 104 | 88 | 100 | 86 | 98 | 85 | 103 | 89 | 100 | 87 | 97 | 85 | 95 | 84 | 96 | 87 | 94 | 85 | 92 | 84 | 90 | 82 | 90 | 85 | 88 | 83 | 87 | 82 | 85 | 81 | 80 | 79 | |
| 10.00 | 109 | 91 | 107 | 90 | 104 | 89 | 102 | 87 | 105 | 90 | 103 | 89 | 101 | 88 | 99 | 86 | 98 | 88 | 96 | 87 | 95 | 86 | 93 | 85 | 92 | 86 | 90 | 85 | 89 | 84 | 88 | 83 | 83 | 81 | |

JIS C 8030:2014

三菱電機照明株式会社