


| | | | | |
|--------|-------------------------|----|--|------|
| 形名 | EL-LFB45122B AHN (25N5) | 電源 | | ○諸特性 |
| 出力 | 固定出力 | 温度 | | |
| モード | | | | |
| オプション1 | L4362 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|--------|------|--------------------|-------|-------|-------|----|-------|
| 光源 | | LDL40S-WW/17/23-N4 | | | | | |
| 最大取付間隔 | 高さ | H | | | | | |
| | A-A' | 1.1 H | | | | | |
| | B-B' | 1.0 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 0.0% | 47.7% | 47.7% | | | |
| 保守率 | | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

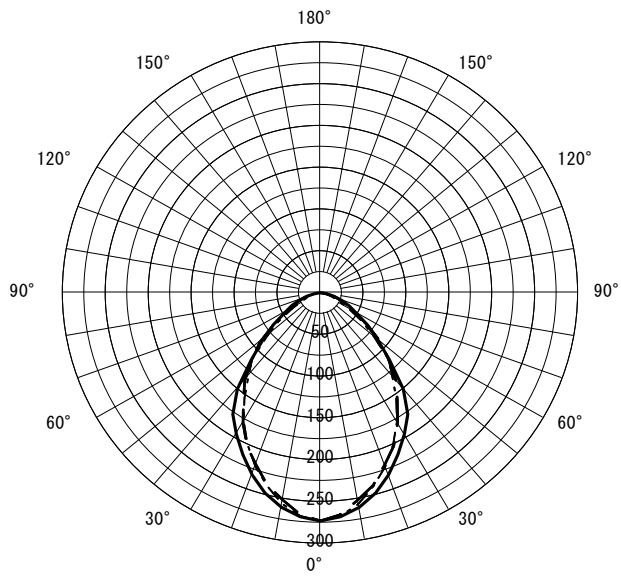

○直射水平面照度 (全光束: 2300 × 2 = 4600lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

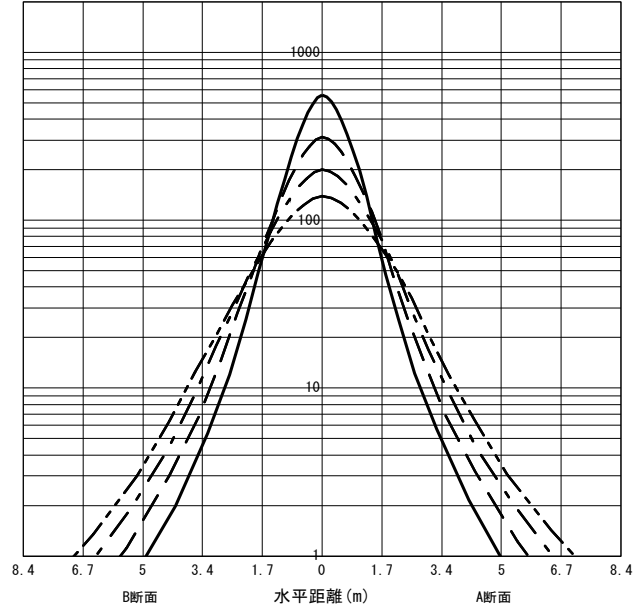

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | | | | | 30 | | | | | | | | 20 | 0 | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 34 | 31 | 28 | 26 | 24 | 23 | 21 | 21 | 33 | 31 | 27 | 26 | 24 | 23 | 21 | 21 | 32 | 30 | 27 | 26 | 24 | 23 | 21 | 21 | 31 | 29 | 26 | 25 | 23 | 23 | 21 | 21 | 21 | 20 | | | | | | | | |
| 0.80 | 40 | 36 | 34 | 32 | 30 | 29 | 27 | 26 | 39 | 35 | 33 | 31 | 29 | 28 | 27 | 26 | 37 | 34 | 32 | 31 | 29 | 28 | 27 | 26 | 35 | 33 | 31 | 30 | 28 | 28 | 26 | 26 | 26 | 25 | | | | | | | | |
| 1.00 | 43 | 39 | 38 | 35 | 34 | 32 | 31 | 30 | 42 | 38 | 37 | 35 | 33 | 32 | 31 | 30 | 40 | 37 | 36 | 34 | 33 | 32 | 30 | 30 | 38 | 36 | 35 | 33 | 32 | 31 | 30 | 29 | 29 | 29 | | | | | | | | |
| 1.25 | 47 | 41 | 41 | 38 | 38 | 35 | 35 | 33 | 45 | 41 | 41 | 37 | 37 | 35 | 34 | 33 | 43 | 40 | 39 | 37 | 36 | 35 | 34 | 33 | 41 | 38 | 38 | 36 | 35 | 34 | 33 | 33 | 32 | 32 | | | | | | | | |
| 1.50 | 49 | 43 | 44 | 40 | 40 | 37 | 38 | 35 | 47 | 42 | 43 | 39 | 40 | 37 | 37 | 35 | 45 | 41 | 41 | 39 | 39 | 37 | 36 | 35 | 43 | 40 | 40 | 38 | 37 | 36 | 36 | 35 | 35 | 34 | | | | | | | | |
| 2.00 | 52 | 45 | 48 | 43 | 44 | 40 | 42 | 39 | 50 | 45 | 47 | 42 | 44 | 40 | 41 | 39 | 47 | 43 | 44 | 41 | 42 | 40 | 40 | 38 | 45 | 42 | 43 | 41 | 41 | 39 | 39 | 38 | 38 | 37 | | | | | | | | |
| 2.50 | 54 | 47 | 50 | 44 | 47 | 42 | 45 | 41 | 52 | 46 | 49 | 44 | 46 | 42 | 44 | 41 | 49 | 45 | 46 | 43 | 44 | 41 | 42 | 40 | 46 | 44 | 44 | 42 | 43 | 41 | 41 | 40 | 40 | 39 | | | | | | | | |
| 3.00 | 55 | 47 | 52 | 46 | 49 | 44 | 47 | 42 | 53 | 47 | 51 | 45 | 48 | 44 | 46 | 42 | 50 | 46 | 48 | 44 | 46 | 43 | 44 | 42 | 47 | 44 | 46 | 43 | 44 | 42 | 43 | 41 | 41 | 40 | | | | | | | | |
| 4.00 | 57 | 49 | 54 | 47 | 52 | 46 | 50 | 45 | 55 | 48 | 53 | 47 | 51 | 45 | 49 | 44 | 52 | 47 | 50 | 46 | 48 | 45 | 47 | 44 | 49 | 46 | 47 | 45 | 46 | 44 | 45 | 43 | 43 | 42 | | | | | | | | |
| 5.00 | 58 | 49 | 56 | 48 | 54 | 47 | 52 | 46 | 56 | 49 | 54 | 47 | 52 | 46 | 51 | 46 | 52 | 47 | 51 | 46 | 50 | 46 | 48 | 45 | 49 | 46 | 48 | 46 | 47 | 45 | 46 | 44 | 44 | 43 | | | | | | | | |
| 7.00 | 59 | 50 | 58 | 49 | 56 | 48 | 55 | 47 | 57 | 49 | 56 | 49 | 54 | 48 | 53 | 47 | 54 | 48 | 52 | 48 | 51 | 47 | 50 | 46 | 50 | 47 | 49 | 47 | 49 | 46 | 48 | 45 | 45 | 44 | | | | | | | | |
| 10.00 | 60 | 51 | 59 | 50 | 58 | 49 | 57 | 49 | 58 | 50 | 57 | 49 | 56 | 49 | 55 | 48 | 54 | 49 | 53 | 48 | 53 | 48 | 52 | 47 | 51 | 48 | 50 | 47 | 50 | 47 | 49 | 47 | 46 | 45 | | | | | | | | |

JIS C 8030:2014

三菱電機照明株式会社