


| | | | | |
|--------|-------------------------|----|--|------|
| 形名 | EL-LFB45122B AHN (25N5) | 電源 | | ○諸特性 |
| 出力 | 固定出力 | 温度 | | |
| モード | | | | |
| オプション1 | L45022 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|-------------------|-------|-------|-------|----|-------|
| 光源 | | LDL40S-W/17/23-N4 | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.4 H | | | | | |
| | B-B' | 1.0 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 0.0% | 65.7% | 65.8% | | | |
| 保守率 | | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

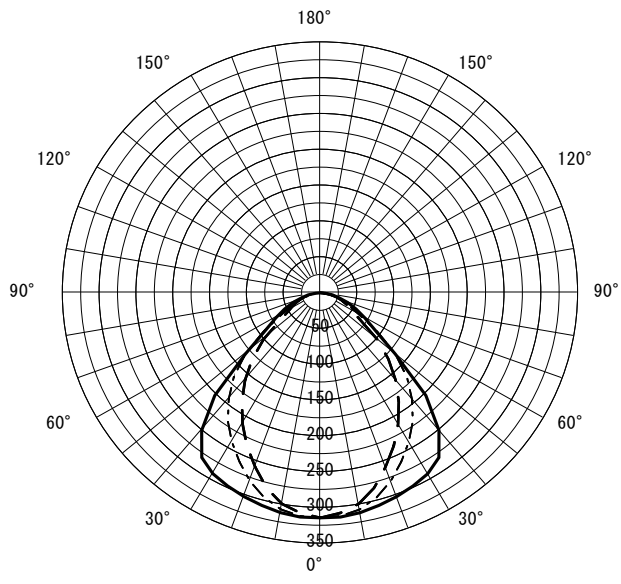

○直射水平面照度 (全光束 : 2300 × 2 = 4600lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

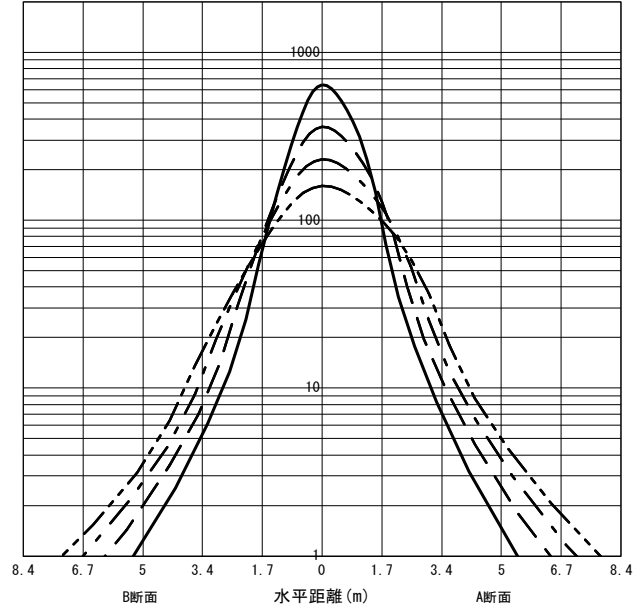

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 45 | 42 | 36 | 35 | 31 | 30 | 27 | 27 | 44 | 41 | 36 | 34 | 31 | 30 | 27 | 27 | 42 | 40 | 35 | 34 | 30 | 30 | 27 | 27 | 40 | 38 | 34 | 33 | 30 | 29 | 27 | 27 | 27 | 26 |
| 0.80 | 53 | 48 | 45 | 42 | 39 | 38 | 35 | 34 | 52 | 48 | 44 | 42 | 39 | 37 | 35 | 34 | 49 | 46 | 43 | 41 | 38 | 37 | 35 | 34 | 47 | 45 | 41 | 40 | 37 | 37 | 34 | 34 | 34 | 33 |
| 1.00 | 59 | 53 | 50 | 47 | 45 | 43 | 41 | 39 | 57 | 52 | 50 | 46 | 44 | 42 | 41 | 39 | 54 | 50 | 48 | 45 | 43 | 42 | 40 | 39 | 51 | 49 | 46 | 44 | 42 | 41 | 39 | 39 | 39 | 38 |
| 1.25 | 63 | 56 | 56 | 51 | 50 | 47 | 46 | 44 | 61 | 55 | 55 | 50 | 50 | 47 | 46 | 44 | 58 | 54 | 52 | 49 | 48 | 46 | 45 | 44 | 55 | 52 | 51 | 48 | 47 | 46 | 44 | 43 | 43 | 42 |
| 1.50 | 67 | 59 | 59 | 54 | 54 | 50 | 50 | 47 | 64 | 58 | 58 | 53 | 53 | 50 | 50 | 47 | 61 | 56 | 56 | 52 | 49 | 48 | 47 | 44 | 55 | 52 | 51 | 48 | 47 | 46 | 44 | 43 | 43 | 42 |
| 2.00 | 71 | 62 | 65 | 58 | 60 | 55 | 56 | 52 | 69 | 61 | 63 | 57 | 59 | 54 | 55 | 52 | 65 | 59 | 60 | 56 | 57 | 53 | 54 | 51 | 61 | 57 | 58 | 55 | 55 | 53 | 52 | 51 | 51 | 49 |
| 2.50 | 74 | 64 | 68 | 60 | 64 | 58 | 60 | 55 | 71 | 63 | 67 | 60 | 63 | 57 | 59 | 55 | 67 | 61 | 63 | 58 | 60 | 56 | 57 | 54 | 63 | 59 | 60 | 57 | 58 | 55 | 55 | 54 | 53 | 52 |
| 3.00 | 76 | 65 | 71 | 62 | 67 | 60 | 64 | 58 | 73 | 64 | 69 | 61 | 65 | 59 | 62 | 57 | 69 | 62 | 65 | 60 | 62 | 58 | 60 | 56 | 65 | 61 | 62 | 59 | 60 | 57 | 58 | 56 | 55 | 54 |
| 4.00 | 78 | 67 | 74 | 64 | 71 | 62 | 68 | 61 | 76 | 66 | 72 | 64 | 69 | 62 | 67 | 60 | 71 | 64 | 68 | 62 | 66 | 61 | 64 | 59 | 66 | 62 | 64 | 61 | 63 | 60 | 61 | 58 | 58 | 57 |
| 5.00 | 80 | 68 | 77 | 66 | 74 | 64 | 71 | 63 | 77 | 67 | 74 | 65 | 72 | 63 | 69 | 62 | 72 | 65 | 70 | 64 | 68 | 62 | 66 | 61 | 68 | 63 | 66 | 62 | 64 | 61 | 63 | 60 | 60 | 58 |
| 7.00 | 82 | 69 | 79 | 67 | 77 | 66 | 75 | 65 | 79 | 68 | 77 | 67 | 75 | 65 | 73 | 64 | 73 | 66 | 72 | 65 | 70 | 64 | 69 | 63 | 69 | 65 | 68 | 64 | 66 | 63 | 65 | 62 | 62 | 60 |
| 10.00 | 83 | 70 | 81 | 69 | 80 | 68 | 78 | 67 | 80 | 69 | 78 | 68 | 77 | 67 | 76 | 66 | 75 | 67 | 73 | 66 | 72 | 66 | 71 | 65 | 70 | 66 | 69 | 65 | 68 | 64 | 67 | 64 | 63 | 62 |

JIS C 8030:2014

三菱電機照明株式会社