


形名	EL-LFB45122B AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	L4362			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-N/17/25-N5					
最大取付間隔	高さ	H					
	A-A'	1.1 H					
	B-B'	1.0 H					
器具効率		上方光束	下方光束	計			
		0.0%	47.7%	47.7%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

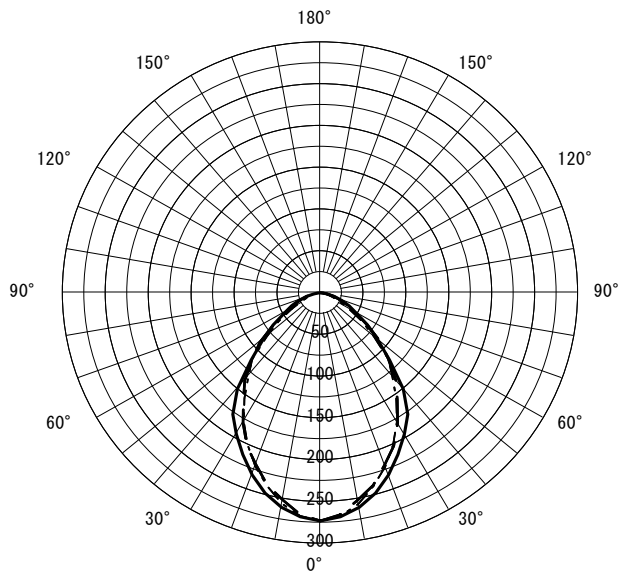

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

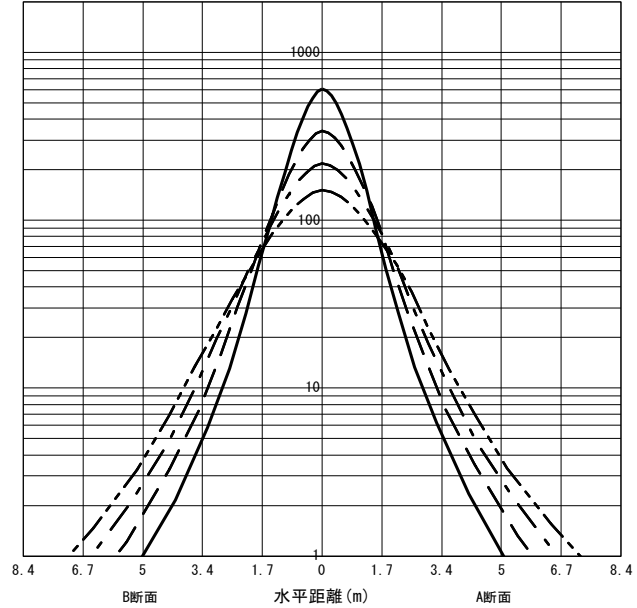

反射率 (%)																																										
天井	80				70				50				30				20	0																								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	34	31	28	26	24	23	21	21	33	31	27	26	24	23	21	21	32	30	27	26	24	23	21	21	31	29	26	25	23	23	21	21	21	20								
0.80	40	36	34	32	30	29	27	26	39	35	33	31	29	28	27	26	37	34	32	31	29	28	27	26	35	33	31	30	28	28	26	26	26	25								
1.00	43	39	38	35	34	32	31	30	42	38	37	35	33	32	31	30	40	37	36	34	33	32	30	30	38	36	35	33	32	31	30	29	29	29								
1.25	47	41	41	38	38	35	35	33	45	41	41	37	37	35	34	33	43	40	39	37	36	35	34	33	41	38	38	36	35	34	33	33	32	32								
1.50	49	43	44	40	40	37	38	35	47	42	43	39	40	37	37	35	45	41	41	39	39	37	36	35	43	40	40	38	37	36	36	35	35	34								
2.00	52	45	48	43	44	40	42	39	50	45	47	42	44	40	41	39	47	43	44	41	42	40	40	38	45	42	43	41	41	39	39	38	38	37								
2.50	54	47	50	44	47	42	45	41	52	46	49	44	46	42	44	41	49	45	46	43	44	41	42	40	46	44	44	42	43	41	41	40	40	39								
3.00	55	47	52	46	49	44	47	42	53	47	51	45	48	44	46	42	50	46	48	44	46	43	44	42	47	44	46	43	44	42	43	41	41	40								
4.00	57	49	54	47	52	46	50	45	55	48	53	47	51	45	49	44	52	47	50	46	48	45	47	44	49	46	47	45	46	44	45	43	43	42								
5.00	58	49	56	48	54	47	52	46	56	49	54	47	52	46	51	46	52	47	51	46	50	46	48	45	49	46	48	46	47	45	46	44	44	43								
7.00	59	50	58	49	56	48	55	47	57	49	56	49	54	48	53	47	54	48	52	48	51	47	50	46	50	47	49	47	49	46	48	45	45	44								
10.00	60	51	59	50	58	49	57	49	58	50	57	49	56	49	55	48	54	49	53	48	53	48	52	47	51	48	50	47	50	47	49	47	46	45								

JIS C 8030:2014

三菱電機照明株式会社