


| | | | | |
|--------|-------------------------|----|--|------|
| 形名 | EL-LFB45122B AHX (25N5) | 電源 | | ○諸特性 |
| 出力 | 連調単色 | 温度 | | |
| モード | | | | |
| オプション1 | P4402 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|-------------------|-------|-------|-------|----|-------|
| 光源 | | LDL40S-N/17/25-N5 | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.3 H | | | | | |
| | B-B' | 1.3 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 0.0% | 92.6% | 92.6% | | | |
| 保守率 | | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

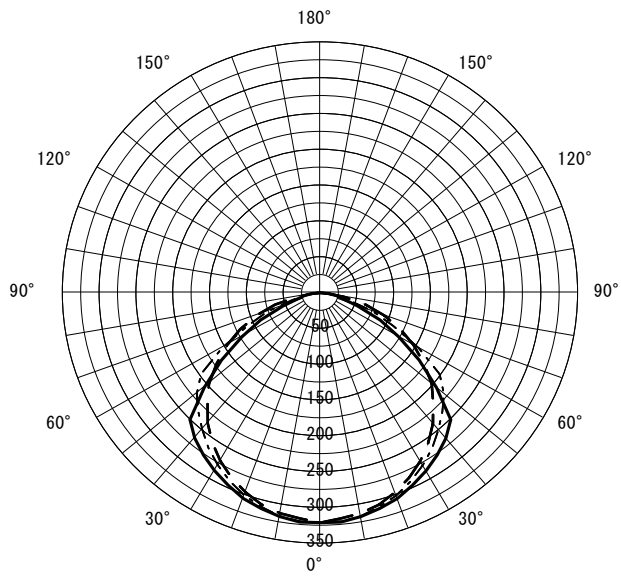

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)

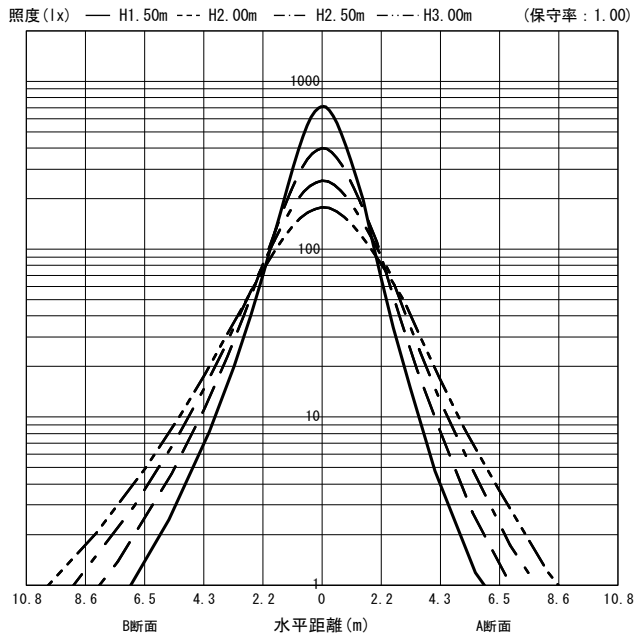

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|
| 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | | | | | 30 | | | | | | | | 20 | 0 | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 58 | 54 | 44 | 42 | 36 | 35 | 31 | 30 | 56 | 52 | 44 | 42 | 36 | 35 | 31 | 30 | 53 | 50 | 42 | 41 | 35 | 35 | 30 | 30 | 51 | 48 | 41 | 40 | 35 | 34 | 30 | 30 | 30 | 28 | | |
| 0.80 | 70 | 63 | 56 | 53 | 48 | 46 | 42 | 41 | 68 | 62 | 55 | 52 | 47 | 45 | 41 | 40 | 64 | 59 | 53 | 51 | 46 | 45 | 41 | 40 | 61 | 57 | 52 | 50 | 45 | 44 | 41 | 40 | 40 | 38 | | |
| 1.00 | 78 | 70 | 65 | 60 | 56 | 53 | 50 | 48 | 75 | 68 | 63 | 59 | 55 | 53 | 49 | 48 | 71 | 66 | 61 | 58 | 54 | 52 | 49 | 48 | 67 | 63 | 59 | 57 | 53 | 51 | 48 | 47 | 47 | 45 | | |
| 1.25 | 85 | 75 | 73 | 67 | 64 | 60 | 58 | 55 | 82 | 74 | 71 | 66 | 63 | 60 | 57 | 55 | 77 | 71 | 68 | 64 | 62 | 59 | 56 | 55 | 73 | 69 | 66 | 63 | 60 | 58 | 55 | 54 | 54 | 52 | | |
| 1.50 | 90 | 79 | 79 | 71 | 71 | 65 | 64 | 61 | 87 | 78 | 77 | 71 | 69 | 65 | 64 | 60 | 82 | 75 | 73 | 69 | 67 | 64 | 62 | 60 | 77 | 72 | 70 | 67 | 65 | 63 | 61 | 59 | 59 | 57 | | |
| 2.00 | 97 | 84 | 87 | 78 | 80 | 73 | 74 | 68 | 94 | 83 | 85 | 77 | 78 | 72 | 73 | 68 | 88 | 80 | 81 | 75 | 75 | 71 | 71 | 67 | 83 | 78 | 77 | 73 | 72 | 70 | 69 | 67 | 66 | 64 | | |
| 2.50 | 101 | 88 | 93 | 82 | 86 | 78 | 81 | 74 | 98 | 86 | 90 | 81 | 84 | 77 | 79 | 73 | 92 | 83 | 86 | 79 | 81 | 76 | 76 | 72 | 86 | 81 | 81 | 77 | 77 | 74 | 74 | 71 | 71 | 69 | | |
| 3.00 | 105 | 90 | 97 | 85 | 91 | 81 | 86 | 77 | 101 | 88 | 94 | 84 | 89 | 80 | 84 | 77 | 94 | 86 | 89 | 82 | 85 | 79 | 81 | 76 | 89 | 83 | 85 | 80 | 81 | 77 | 78 | 75 | 74 | 73 | | |
| 4.00 | 109 | 92 | 103 | 89 | 97 | 85 | 93 | 83 | 105 | 91 | 99 | 88 | 95 | 85 | 91 | 82 | 98 | 89 | 94 | 86 | 90 | 83 | 87 | 81 | 92 | 86 | 89 | 84 | 86 | 82 | 83 | 80 | 79 | 77 | | |
| 5.00 | 111 | 94 | 106 | 91 | 102 | 88 | 98 | 86 | 107 | 93 | 103 | 90 | 99 | 87 | 95 | 85 | 100 | 90 | 96 | 88 | 93 | 86 | 90 | 84 | 94 | 88 | 91 | 86 | 89 | 84 | 86 | 82 | 82 | 80 | | |
| 7.00 | 114 | 96 | 110 | 94 | 107 | 92 | 103 | 90 | 110 | 95 | 107 | 93 | 103 | 91 | 101 | 89 | 102 | 92 | 100 | 91 | 97 | 89 | 95 | 87 | 96 | 90 | 94 | 89 | 92 | 87 | 90 | 86 | 85 | 83 | | |
| 10.00 | 116 | 97 | 114 | 96 | 111 | 94 | 108 | 93 | 112 | 96 | 110 | 95 | 107 | 93 | 105 | 92 | 104 | 94 | 102 | 93 | 101 | 91 | 99 | 90 | 98 | 92 | 96 | 91 | 95 | 90 | 94 | 89 | 88 | 86 | | |

JIS C 8030:2014

三菱電機照明株式会社