


形名	EL-LFB45122B AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	L45022			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-N/17/25-N5					
最大 取付 間隔	高さ	H					
	A-A'	1.4 H					
	B-B'	1.0 H					
器具効率		上方光束	下方光束	計			
		0.0%	65.7%	65.8%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

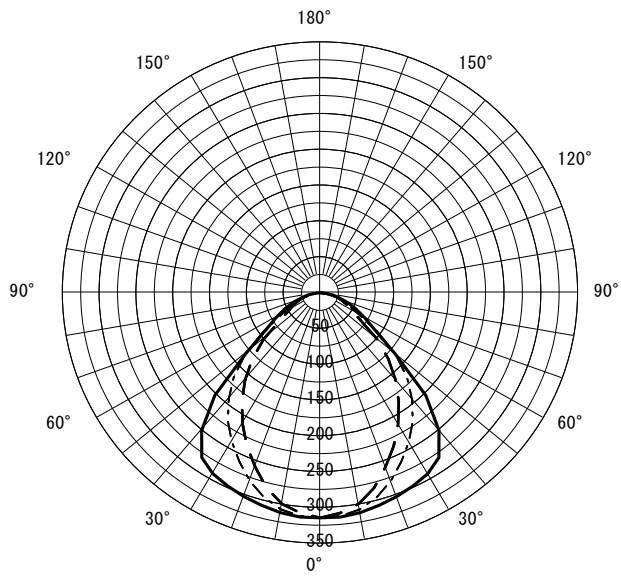

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

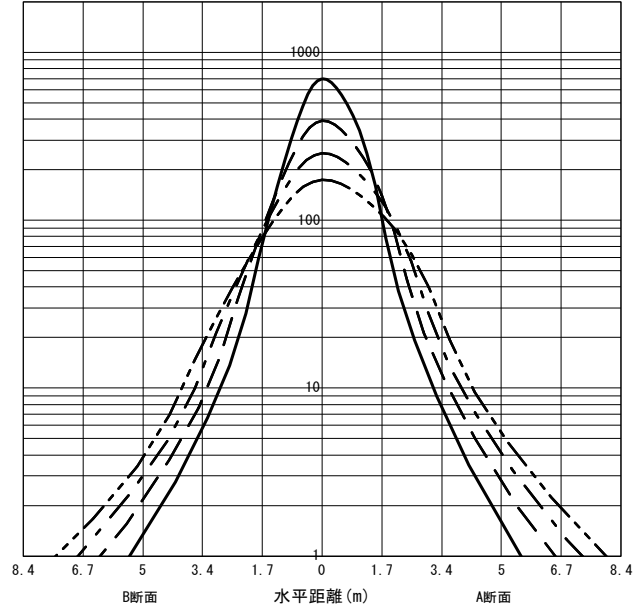

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	45	42	36	35	31	30	27	27	44	41	36	34	31	30	27	27	42	40	35	34	30	30	27	27	40	38	34	33	30	29	27	27	27	26								
0.80	53	48	45	42	39	38	35	34	52	48	44	42	39	37	35	34	49	46	43	41	38	37	35	34	47	45	41	40	37	37	34	34	34	33								
1.00	59	53	50	47	45	43	41	39	57	52	50	46	44	42	41	39	54	50	48	45	43	42	40	39	51	49	46	44	42	41	39	39	39	38								
1.25	63	56	56	51	50	47	46	44	61	55	55	50	50	47	46	44	58	54	52	49	48	46	45	44	55	52	51	48	47	46	44	43	43	42								
1.50	67	59	59	54	54	50	50	47	64	58	58	53	53	50	50	47	61	56	56	52	49	48	47	47	58	54	54	51	50	49	47	46	46	45								
2.00	71	62	65	58	60	55	56	52	69	61	63	57	59	54	55	52	65	59	60	56	57	53	54	51	61	57	58	55	55	53	52	51	51	49								
2.50	74	64	68	60	64	58	60	55	71	63	67	60	63	57	59	55	67	61	63	58	60	56	57	54	63	59	60	57	58	55	55	54	53	52								
3.00	76	65	71	62	67	60	64	58	73	64	69	61	65	59	62	57	69	62	65	60	62	58	60	56	65	61	62	59	60	57	58	56	55	54								
4.00	78	67	74	64	71	62	68	61	76	66	72	64	69	62	67	60	71	64	68	62	66	61	64	59	66	62	64	61	63	60	61	58	58	57								
5.00	80	68	77	66	74	64	71	63	77	67	74	65	72	63	69	62	72	65	70	64	68	62	66	61	68	63	66	62	64	61	63	60	60	58								
7.00	82	69	79	67	77	66	75	65	79	68	77	67	75	65	73	64	73	66	72	65	70	64	69	63	69	65	68	64	66	63	65	62	62	60								
10.00	83	70	81	69	80	68	78	67	80	69	78	68	77	67	76	66	75	67	73	66	72	66	71	65	70	66	69	65	68	64	67	64	63	62								

JIS C 8030:2014

三菱電機照明株式会社