


形名	EL-LFB45122B AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	L4522			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-N/17/25-N5					
最大 取付 間隔	高さ	H					
	A-A'	1.6 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	63.2%	63.2%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

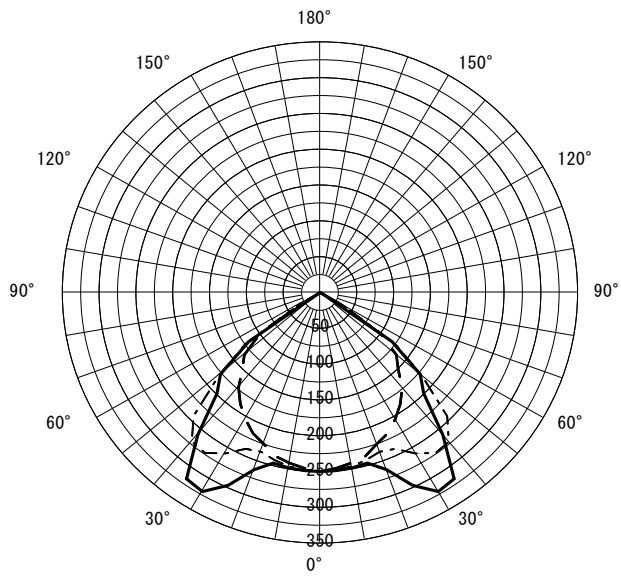

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

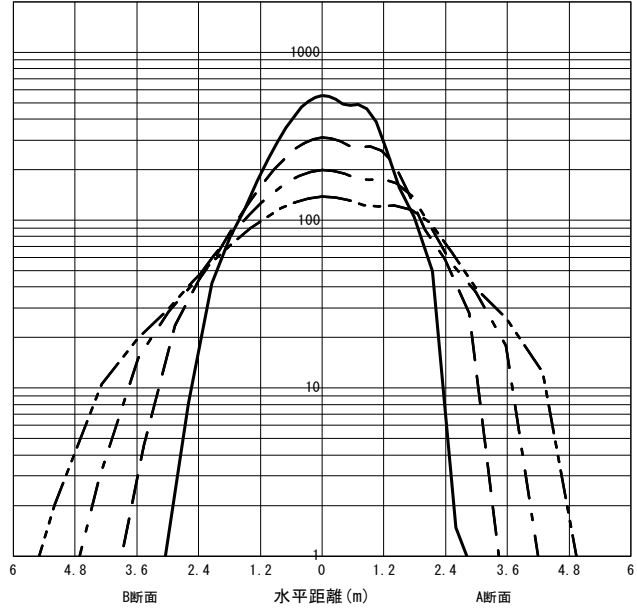

反射率 (%)																																																		
天井	80								70								50								30								20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																																	
0.60	43	39	34	33	29	28	25	25	42	39	34	32	29	28	25	25	40	37	33	32	28	28	25	25	38	36	32	31	28	27	25	25	25	24																
0.80	52	47	44	41	38	37	35	34	51	46	43	41	38	37	35	34	48	45	42	40	37	36	34	34	46	43	41	39	37	36	34	34	33	32																
1.00	58	52	50	46	45	43	41	40	56	51	49	46	44	42	41	40	53	49	48	45	43	42	40	39	51	48	46	44	43	41	40	39	39	38																
1.25	62	55	55	51	51	47	47	45	61	55	54	50	50	47	46	45	57	53	52	49	49	47	46	44	55	52	51	48	47	46	45	44	44	43																
1.50	65	58	59	54	54	50	51	48	64	57	58	53	54	50	50	48	60	55	56	52	52	50	49	47	57	54	53	51	51	49	48	47	47	46																
2.00	70	61	64	57	60	55	57	52	68	60	63	57	59	54	56	52	64	58	60	56	57	54	54	52	60	57	57	55	55	53	53	51	51	50																
2.50	72	62	68	60	64	57	61	55	70	61	66	59	62	57	60	55	66	60	63	58	60	56	58	54	62	58	60	57	58	55	56	54	54	52																
3.00	74	63	70	61	66	59	63	57	72	63	68	60	65	59	62	57	67	61	64	59	62	58	60	56	63	60	61	58	59	57	58	56	55	54																
4.00	76	65	73	63	70	61	67	60	74	64	71	62	68	61	66	60	69	62	67	61	65	60	63	59	65	61	63	60	62	59	60	58	57	56																
5.00	78	66	75	64	72	63	70	62	75	65	72	63	70	62	68	61	70	63	68	62	67	61	65	60	66	62	65	61	63	60	62	59	59	58																
7.00	79	67	77	65	75	64	73	64	76	66	74	65	73	64	71	63	71	64	70	63	69	63	67	62	67	63	66	62	65	62	64	61	60	59																
10.00	80	67	79	66	77	66	76	65	77	66	76	66	75	65	74	64	72	65	71	64	70	64	69	63	68	64	67	63	66	63	66	62	62	60																

JIS C 8030:2014

三菱電機照明株式会社