


形名	EL-LFB45122B AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1	L45232			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-N/17/25-N5					
最大 取付 間隔	高さ	H					
	A-A'	1.8 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	78.9%	78.9%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

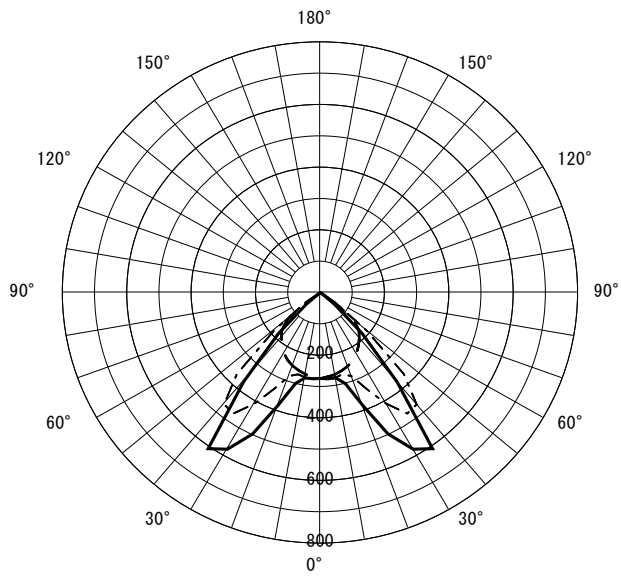

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

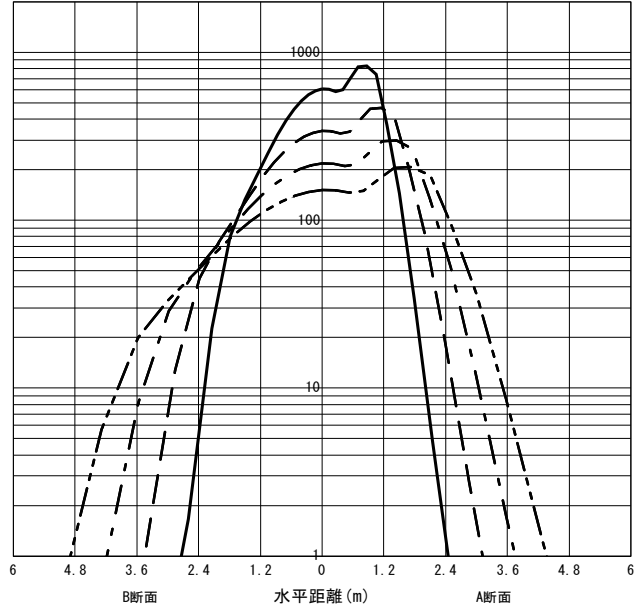

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	55	51	44	42	38	37	34	33	53	50	44	42	38	37	33	33	51	48	43	41	37	36	33	33	49	46	42	40	37	36	33	33	33	31								
0.80	66	60	56	53	50	48	45	44	64	59	55	52	49	48	45	44	61	57	54	51	49	47	45	44	59	56	52	51	48	47	44	44	44	42								
1.00	73	66	64	59	58	55	53	52	71	65	63	59	57	55	53	51	68	63	61	58	56	54	52	51	65	61	59	57	55	53	52	51	51	49								
1.25	79	70	71	65	65	61	60	57	77	69	69	64	64	60	60	57	73	67	67	63	62	60	59	57	69	65	65	62	61	59	58	56	56	55								
1.50	83	73	75	68	69	64	65	61	80	72	73	67	68	64	64	61	76	70	71	66	66	63	63	61	72	68	68	65	64	62	62	60	60	59								
2.00	88	76	81	72	76	69	72	67	85	75	79	72	75	69	71	66	80	73	76	70	72	68	69	66	76	72	73	69	70	67	67	65	65	63								
2.50	91	78	85	75	80	72	77	70	88	77	83	74	79	72	75	70	83	75	79	73	76	71	73	69	78	74	75	72	73	70	70	68	68	66								
3.00	93	80	88	77	84	74	80	72	90	79	85	76	82	74	79	72	84	77	81	75	78	73	76	71	80	75	77	73	75	72	73	70	70	68								
4.00	95	81	91	79	88	77	85	76	92	80	89	78	86	77	83	75	87	78	84	77	81	75	79	74	82	77	80	75	78	74	76	73	72	71								
5.00	97	82	94	80	91	79	88	77	94	81	91	80	88	78	86	77	88	79	86	78	84	77	82	76	83	78	81	76	79	75	78	75	74	73								
7.00	99	83	96	82	94	81	92	80	95	82	93	81	91	80	89	79	89	80	88	79	86	79	85	78	84	79	83	78	81	77	80	76	76	74								
10.00	100	84	98	83	97	82	95	81	97	83	95	82	94	81	92	81	90	81	89	81	88	80	87	79	85	79	84	79	83	78	82	78	77	76								

JIS C 8030:2014

三菱電機照明株式会社