


形名	EL-LFB4542A AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-W/17/23-N4					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	71.1%	71.1%			
保守率		良い	0.770	普通	0.720	悪い	0.680

○配光曲線図 (cd/1000lm)

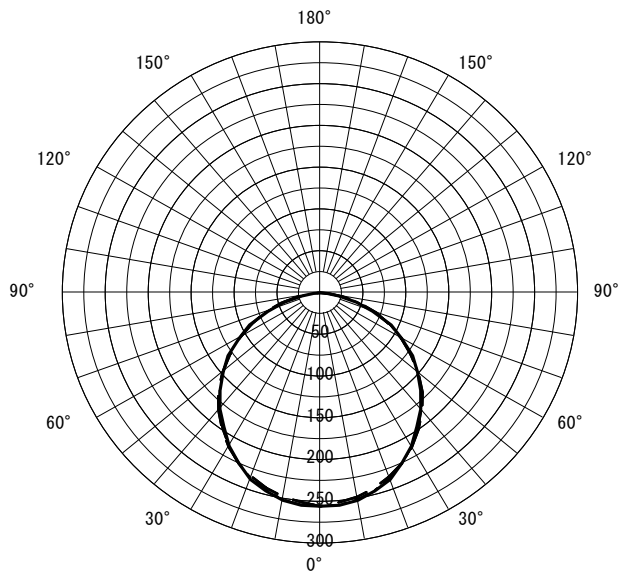

○直射水平面照度 (全光束: 2300 × 2 = 4600lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

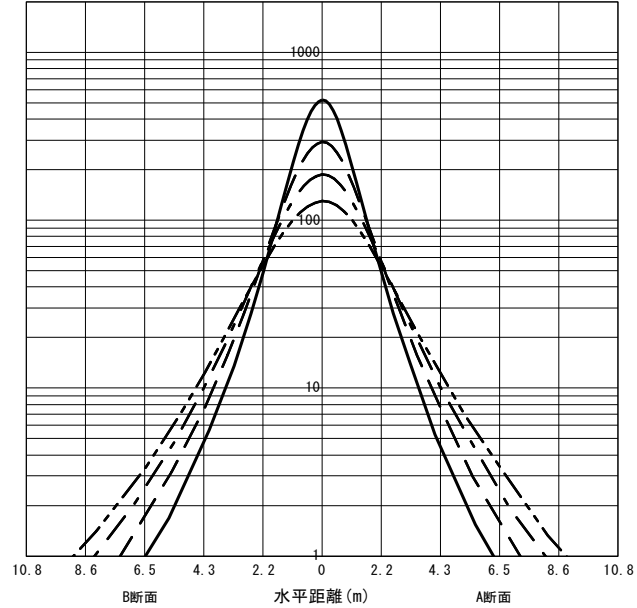

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	45	41	34	33	28	27	24	23	43	40	34	32	28	27	24	23	41	39	33	32	27	27	23	23	39	37	32	31	27	26	23	23	23	22								
0.80	53	48	43	40	36	35	32	31	52	47	42	40	36	35	32	31	49	46	41	39	35	34	31	31	46	44	39	38	35	34	31	31	30	29								
1.00	59	53	49	46	43	40	38	36	57	52	48	45	42	40	37	36	54	50	46	44	41	40	37	36	51	48	45	43	40	39	36	36	36	34								
1.25	65	57	55	51	49	46	44	42	63	56	54	50	48	45	43	42	59	54	52	49	47	45	43	41	56	52	50	48	45	44	42	41	41	39								
1.50	69	60	60	54	54	50	49	46	66	59	58	54	53	49	48	46	62	57	56	52	51	48	47	45	59	55	53	51	49	48	46	45	45	43								
2.00	74	64	66	59	61	55	56	52	71	63	65	59	59	55	55	52	67	61	61	57	57	54	53	51	63	59	59	56	55	53	52	50	50	49								
2.50	77	67	71	63	66	59	61	56	75	66	69	62	64	58	60	56	70	64	65	60	61	57	58	55	66	62	62	59	59	56	56	54	54	52								
3.00	80	69	74	65	69	62	65	59	77	67	72	64	68	61	64	58	72	65	68	63	64	60	61	58	68	64	64	61	62	59	59	57	57	55								
4.00	83	71	78	68	74	65	71	63	80	70	76	67	72	65	69	62	75	68	72	65	69	63	66	61	70	66	68	64	65	62	63	61	60	59								
5.00	85	72	81	70	78	67	74	65	82	71	79	69	75	67	73	65	76	69	74	67	71	66	69	64	72	67	70	66	68	64	66	63	62	61								
7.00	87	74	84	72	82	70	79	69	84	73	82	71	79	69	77	68	78	71	76	69	75	68	73	67	73	69	72	68	70	67	69	66	65	64								
10.00	89	75	87	73	85	72	83	71	86	74	84	73	82	71	80	70	80	72	79	71	77	70	76	69	75	70	74	69	73	69	72	68	67	66								

JIS C 8030:2014

三菱電機照明株式会社