


形名	EL-LFB4543A AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-D/17/24-N4					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	68.8%	68.8%			
保守率		良い	0.770	普通	0.720	悪い	0.680

○配光曲線図 (cd/1000lm)

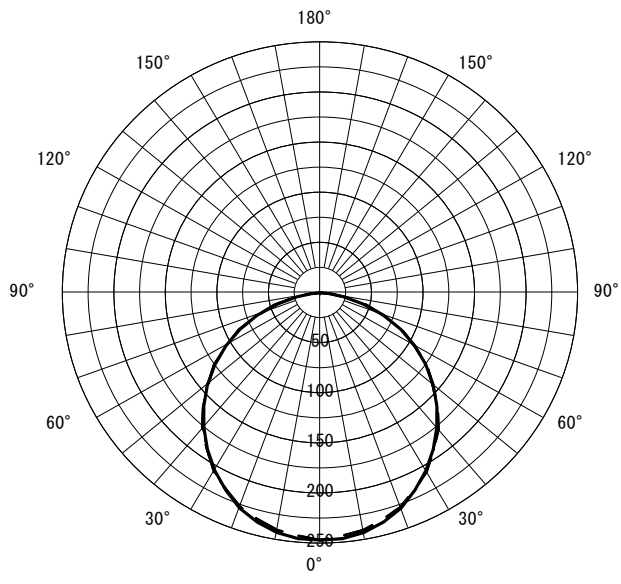

○直射水平面照度 (全光束 : 2400 × 3 = 7200lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

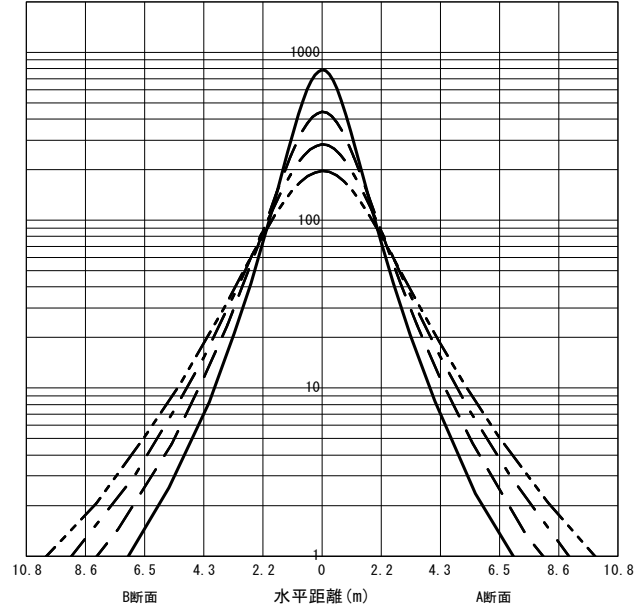

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	43	40	33	32	27	26	23	23	42	39	33	31	27	26	23	23	40	37	32	30	26	26	23	22	38	36	31	30	26	25	23	22	22	21								
0.80	52	47	42	39	35	34	31	30	50	46	41	39	35	34	31	30	47	44	39	38	34	33	30	30	45	42	38	37	33	33	30	30	29	28								
1.00	57	51	48	44	41	39	36	35	55	50	47	44	41	39	36	35	52	48	45	43	40	38	36	35	49	47	43	42	39	38	35	35	34	33								
1.25	63	56	54	49	47	44	42	40	61	54	52	48	46	44	42	40	57	52	50	47	45	43	41	40	54	51	48	46	44	43	40	40	39	38								
1.50	66	58	58	53	52	48	47	44	64	57	57	52	51	48	46	44	60	55	54	51	49	47	45	44	57	53	52	49	48	46	44	43	43	42								
2.00	72	62	64	57	59	53	54	50	69	61	63	57	57	53	53	50	65	59	59	55	55	52	52	49	61	57	57	54	53	51	50	49	48	47								
2.50	75	65	69	61	63	57	59	54	72	64	67	60	62	56	58	54	68	62	63	58	59	55	56	53	63	60	60	57	57	55	54	52	52	51								
3.00	77	66	72	63	67	60	63	57	75	65	70	62	65	59	62	57	70	63	66	60	62	58	59	56	65	61	62	59	60	57	57	55	55	53								
4.00	80	68	76	66	72	63	68	61	78	67	73	65	70	62	67	60	72	65	69	63	66	61	64	59	68	64	65	62	63	60	61	59	58	57								
5.00	82	70	78	67	75	65	72	63	79	69	76	67	73	65	70	63	74	67	71	65	69	63	67	62	69	65	67	64	65	62	64	61	60	59								
7.00	85	71	82	69	79	68	76	66	81	70	79	69	76	67	74	66	76	68	74	67	72	66	70	65	71	67	70	66	68	64	67	63	63	62								
10.00	86	72	84	71	82	70	80	69	83	71	81	70	79	69	78	68	77	70	76	69	75	68	73	67	72	68	71	67	70	66	69	66	65	64								

JIS C 8030:2014

三菱電機照明株式会社