



形名	EL-LFB4552A AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				



光源		LDL40S-N/17/25-N5		
最大 取付 間隔	高さ	H		
	A-A'	1.3 H		
	B-B'	1.2 H		
器具効率	上方光束	下方光束	計	
	0.0%	75.3%	75.3%	
保守率	良い	0.770	普通	0.720
			悪い	0.680


○配光曲線図 (cd/1000lm)

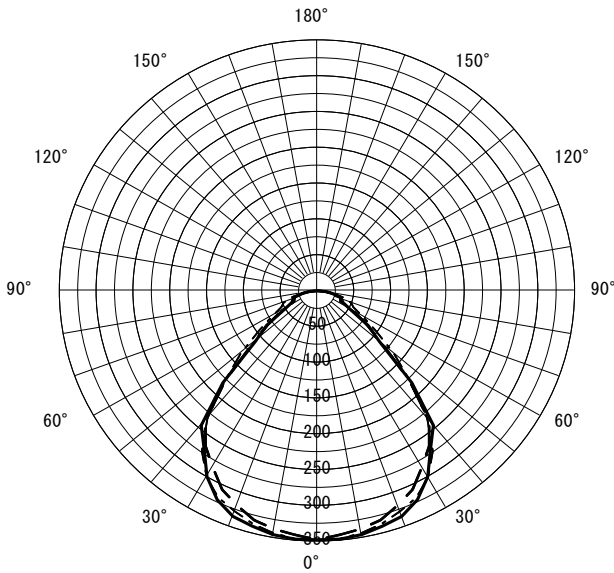

○直射水平面照度

(全光束 : 2500 × 2 = 5000lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率 : 1.00)

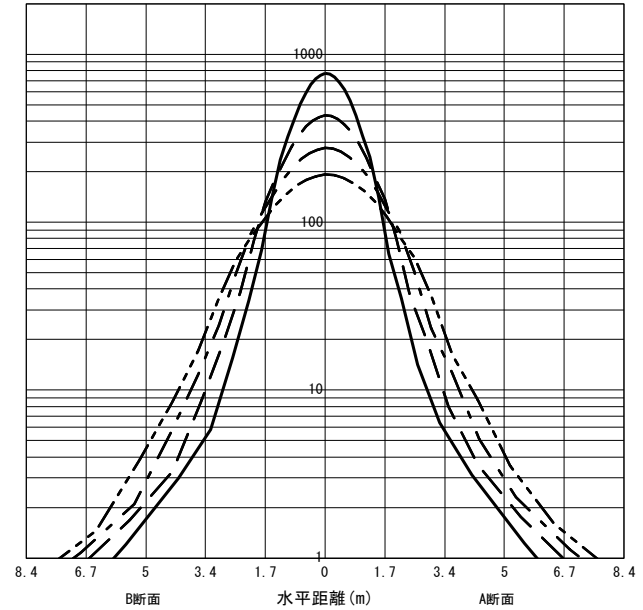

反射率 (%)																																				
天井	80								70								50								30								20	0		
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照度率 (× 0.01)																																			
0.60	52	48	42	40	36	35	32	31	51	47	42	40	36	35	32	31	49	46	41	39	35	35	32	31	47	44	40	38	35	34	31	31	31	30		
0.80	61	56	51	48	45	43	41	40	60	55	51	48	45	43	41	40	57	53	49	47	44	43	40	39	54	51	48	46	43	42	40	39	39	38		
1.00	67	60	58	54	52	49	47	45	65	59	57	53	51	49	47	45	62	57	55	52	50	48	46	45	59	56	53	51	49	48	45	45	45	43		
1.25	72	64	64	58	58	54	53	50	70	63	62	58	57	54	52	50	67	61	60	57	55	53	51	50	63	60	58	55	54	52	51	50	49	48		
1.50	76	67	68	62	62	57	57	54	74	66	66	61	61	57	57	54	70	64	64	60	59	56	55	53	66	62	61	58	57	55	54	53	53	51		
2.00	81	71	74	66	69	62	64	59	79	69	72	65	67	62	63	59	74	67	69	64	65	61	61	59	70	66	66	63	62	60	60	58	58	56		
2.50	84	73	78	69	73	66	69	63	82	72	76	68	71	65	68	63	76	70	72	67	69	64	65	62	72	68	69	65	66	63	63	61	61	59		
3.00	87	74	81	71	76	68	73	66	84	73	79	70	75	67	71	65	78	71	75	69	71	66	68	64	74	69	71	67	68	65	66	64	63	62		
4.00	89	76	85	74	81	71	78	69	86	75	82	73	79	71	76	69	81	73	78	71	75	69	73	68	76	71	74	70	71	68	70	67	66	65		
5.00	91	77	87	75	84	73	81	71	88	76	85	74	82	72	79	71	82	74	80	73	77	71	75	70	77	73	75	71	73	70	72	69	68	67		
7.00	93	79	91	77	88	75	86	74	90	78	88	76	85	75	83	73	84	76	82	74	80	73	79	72	79	74	77	73	76	72	75	71	70	69		
10.00	95	80	93	78	91	77	89	76	92	79	90	78	88	77	86	76	85	77	84	76	83	75	81	74	80	75	79	74	78	74	77	73	72	71		

JIS C 8030:2014

三菱電機照明株式会社