


EL-LFB45702B AHN(25N5)


AHN




○諸特性

光源		LDL40S・N/17/25・N5				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.03m	2.67m	3.33m	3.98m	
	B-B	2.15m	2.69m	3.28m	3.88m	
器具効率	上方光束	下方光束		計		
	0.0%	94.9%		94.9%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

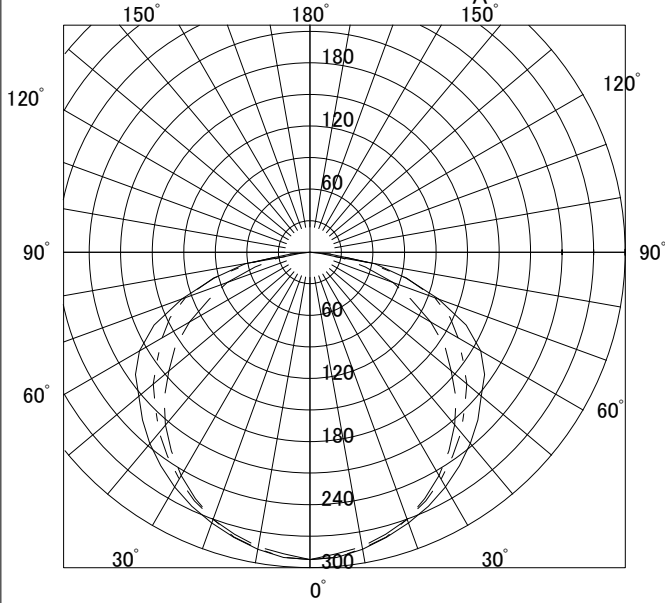

○直射水平面照度

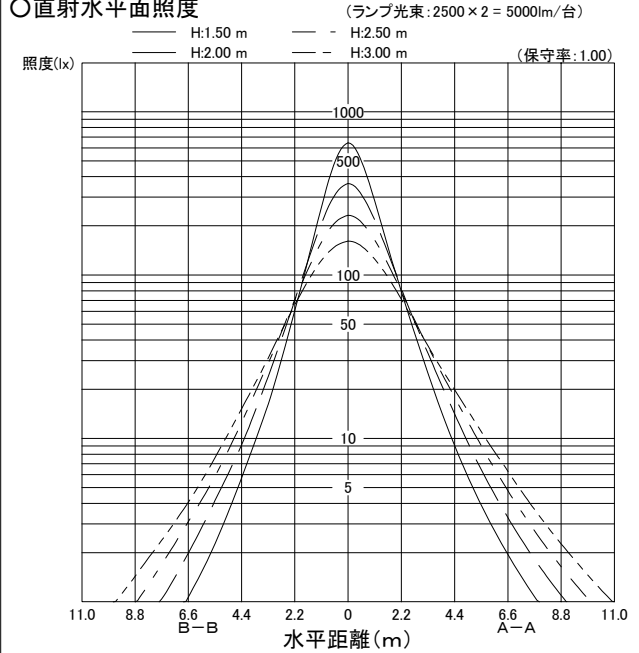

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	42	57	67	75	83	88	96	101	105	110	113	116	119
		10	39	53	61	68	74	78	84	88	90	93	95	98	99
	50	30	29	43	52	61	70	76	85	92	96	103	107	112	115
		10	28	41	49	57	64	69	76	81	84	89	92	95	97
70	30	30	21	34	43	51	60	66	76	84	89	96	101	107	112
		10	21	33	41	49	57	62	70	76	79	85	88	92	96
	10	10	17	28	35	43	51	56	64	71	75	81	85	90	94
		70	30	40	56	65	73	80	85	93	98	101	106	108	112
50	50	30	28	42	51	60	68	74	83	89	93	99	103	108	111
		10	27	40	48	56	63	68	75	80	83	88	90	94	96
	30	30	21	34	42	51	59	65	75	82	87	94	98	104	109
		10	21	33	41	48	56	61	69	75	79	84	87	91	95
30	10	10	16	28	35	43	51	56	64	70	75	80	84	89	93
		50	30	27	41	49	57	65	70	78	84	88	93	97	101
	30	10	26	39	47	54	61	66	73	78	81	85	88	92	94
		30	30	21	33	41	49	58	63	72	78	83	89	93	98
0	10	10	20	33	40	48	55	60	68	73	77	82	86	90	93
		30	30	20	33	41	48	56	61	69	75	79	85	88	93
	10	10	16	28	35	42	50	55	63	69	73	78	82	86	90
		0	0	15	26	33	40	48	52	60	66	70	76	79	83