


形名	EL-LFB4741A AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-D/17/24-N4		
最大 取付 間隔	高さ	H		
	A-A'	1.2 H		
	B-B'	1.2 H		
器具効率		上方光束	下方光束	計
		0.1%	61.8%	61.8%
保守率		良い 0.770	普通 0.720	悪い 0.680

○配光曲線図 (cd/1000lm)

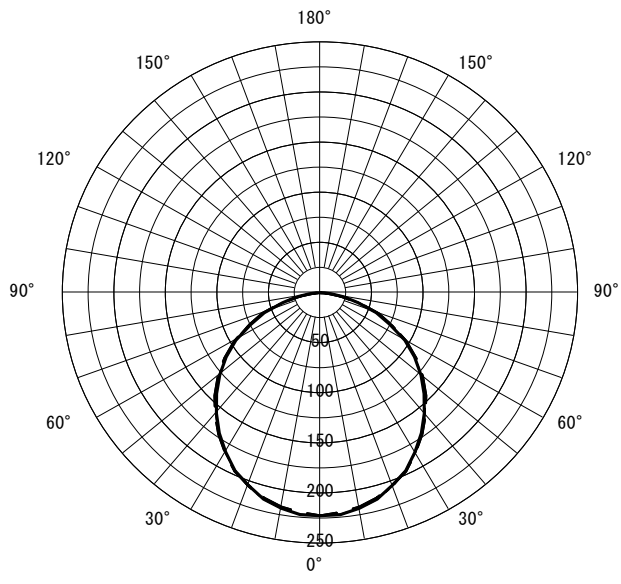

○直射水平面照度 (全光束: 2400 × 1 = 2400lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

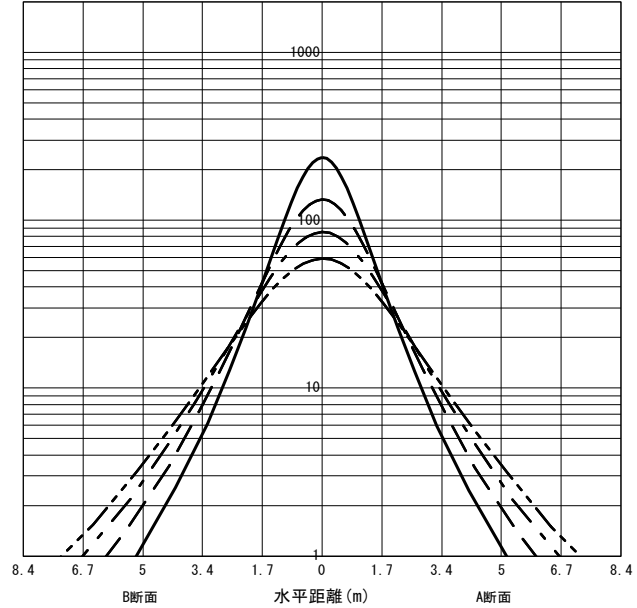

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照明率 (× 0.01)																																	
0.60	39	36	30	28	24	24	21	20	38	35	29	28	24	23	21	20	36	34	28	27	24	23	20	20	34	32	28	27	23	23	20	20	20	19
0.80	46	42	37	35	32	30	28	27	45	41	37	35	31	30	27	27	42	40	35	34	31	30	27	27	40	38	34	33	30	29	27	27	26	25
1.00	51	46	43	40	37	35	33	32	50	45	42	39	37	35	32	31	47	43	40	38	36	34	32	31	44	42	39	37	35	34	32	31	31	30
1.25	56	50	48	44	42	40	38	36	54	49	47	44	42	39	38	36	51	47	45	42	41	39	37	36	48	45	43	41	39	38	36	36	35	34
1.50	60	52	52	47	46	43	42	40	58	51	51	47	46	43	42	40	54	50	48	45	44	42	41	39	51	48	46	44	43	41	40	39	39	37
2.00	64	56	58	52	53	48	49	45	62	55	56	51	52	48	48	45	58	53	53	50	50	47	46	44	55	51	51	48	48	46	45	44	43	42
2.50	67	58	62	54	57	51	53	48	65	57	60	54	56	51	52	48	61	55	57	52	53	50	50	48	57	54	54	51	51	49	49	47	47	45
3.00	69	60	64	56	60	54	56	51	67	59	62	56	59	53	55	51	63	57	59	54	56	52	53	50	59	55	56	53	53	51	51	49	49	48
4.00	72	61	68	59	64	57	61	55	70	61	66	58	63	56	60	54	65	59	62	57	60	55	57	53	61	57	59	55	57	54	55	53	52	51
5.00	74	63	70	60	67	59	65	57	71	62	68	60	65	58	63	56	66	60	64	58	62	57	60	55	62	58	60	57	59	56	57	55	54	53
7.00	76	64	73	62	71	61	69	59	73	63	71	62	69	60	67	59	68	61	66	60	65	59	63	58	64	60	62	59	61	58	60	57	56	55
10.00	78	65	76	64	74	63	72	62	75	64	73	63	71	62	70	61	69	62	68	62	67	61	66	60	65	61	64	60	63	60	62	59	58	57

JIS C 8030:2014

三菱電機照明株式会社