



○諸特性

光源		LDL40S・N/17/25・N5				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.06m	2.71m	3.38m	4.03m	
	B-B	2.13m	2.65m	3.23m	3.82m	
器具効率	上方光束	下方光束		計		
	3.4%	91.5%		94.9%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

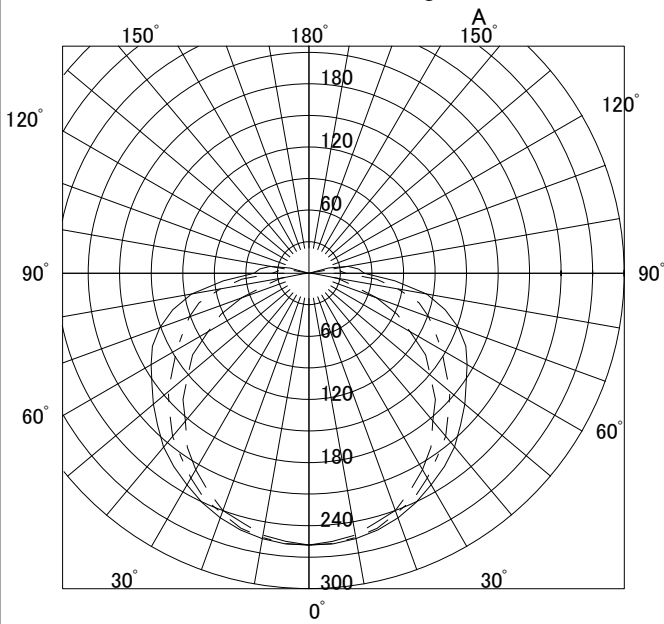

○直射水平面照度

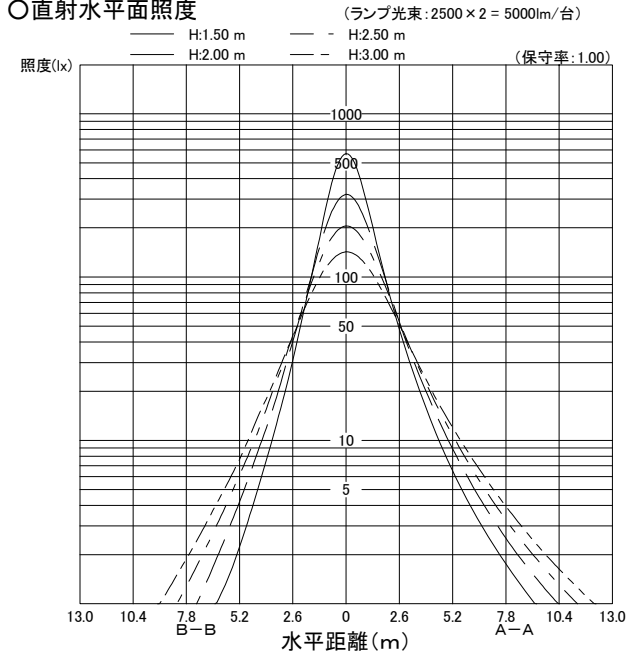

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	41	56	65	73	81	86	93	99	102	107	110	113	116
		10	38	51	59	66	72	76	81	85	87	91	93	95	97
	50	30	28	41	50	58	67	73	82	88	93	99	103	108	112
		10	27	39	47	54	61	66	73	78	81	86	89	92	95
70	30	30	20	33	41	48	57	63	72	80	85	92	97	103	109
		10	20	32	39	46	53	58	66	72	76	81	85	89	92
	10	30	16	26	33	40	47	52	60	66	71	77	81	86	90
		10	16	26	33	40	47	52	60	66	71	77	81	86	90
50	70	30	39	54	63	70	77	82	89	94	98	102	105	109	111
		10	37	50	57	64	70	74	79	83	86	89	91	94	96
	50	30	27	40	49	57	65	70	79	85	89	95	99	104	108
		10	26	39	46	53	60	65	71	76	80	84	87	91	93
30	50	30	20	32	40	48	56	61	70	77	82	89	94	100	105
		10	20	31	38	45	53	57	65	71	75	80	83	88	91
	10	30	15	26	33	40	47	52	60	66	70	76	80	85	89
		10	15	26	33	40	47	52	60	66	70	76	80	85	89
0	30	30	19	30	37	44	52	56	64	70	74	79	83	87	91
		10	19	30	37	43	50	54	62	67	70	75	79	83	86
	10	10	15	25	32	38	45	50	57	63	67	72	76	81	85
0	0	0	13	23	29	36	43	47	54	60	64	69	73	77	81