


EL-LFV20051 HN(13N3)


HN




○諸特性

光源		LDL20S・N/10/13・N3				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.18m	2.90m	3.61m	4.34m	
	B-B	1.94m	2.52m	3.15m	3.78m	
器具効率	上方光束	下方光束		計		
	7.4%	31.0%		38.4%		
保守率	良い	0.810	普通	0.770	悪い	0.720

○配光曲線図 (cd/1000lm)

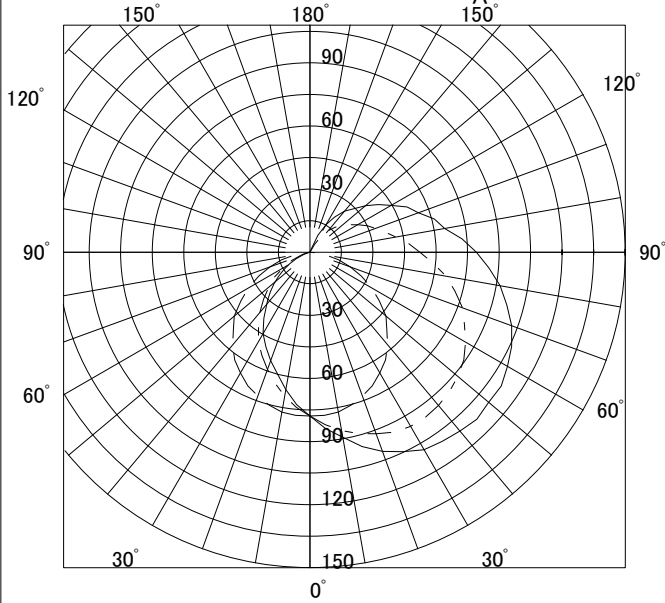

○直射水平面照度

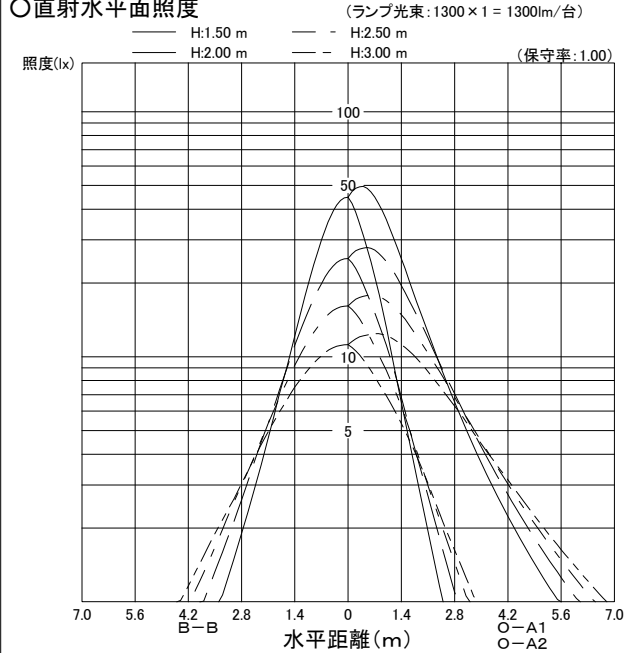

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	16	21	25	28	31	33	36	38	40	41	43	44	45
		10	15	20	23	25	28	29	31	33	34	35	36	37	38
	50	30	11	16	19	22	26	28	31	34	36	38	40	42	44
		10	10	15	18	21	23	25	28	30	31	33	34	36	37
70	30	30	8	12	15	18	22	24	28	30	32	35	37	40	42
		10	8	12	15	18	20	22	25	27	29	31	33	34	36
	10	10	6	10	12	15	18	20	23	25	27	29	31	33	35
		70	15	20	24	27	29	31	34	36	37	39	40	42	43
50	50	30	10	15	18	21	24	27	30	32	34	36	38	40	41
		10	10	14	17	20	23	24	27	29	30	32	33	34	36
	30	30	8	12	15	18	21	23	26	29	31	34	36	38	40
		10	7	12	14	17	20	22	24	27	28	30	32	33	35
30	50	30	9	14	17	20	22	24	27	29	30	32	34	35	37
		10	9	13	16	19	21	23	25	27	28	30	31	32	33
	30	30	7	11	14	17	19	21	24	27	28	31	32	34	36
		10	7	11	13	16	18	20	23	25	26	28	30	31	32
0	30	30	7	10	13	15	18	20	22	24	26	28	29	31	32
		10	6	10	13	15	17	19	21	23	25	26	28	29	30
	10	10	5	9	11	13	16	17	20	22	23	25	27	28	30
		0	4	7	9	11	14	15	18	19	21	23	24	25	27