


形名	EL-LFV2341 1HN(13N4)	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL20S-WW/10/12-N4					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		28.9%	63.6%	92.5%			
保守率		良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

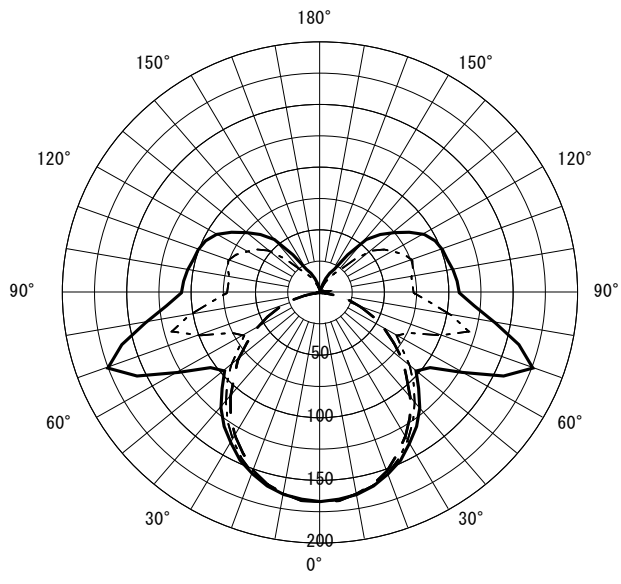

○直射水平面照度 (全光束: 1200 × 1 = 1200lm/台)

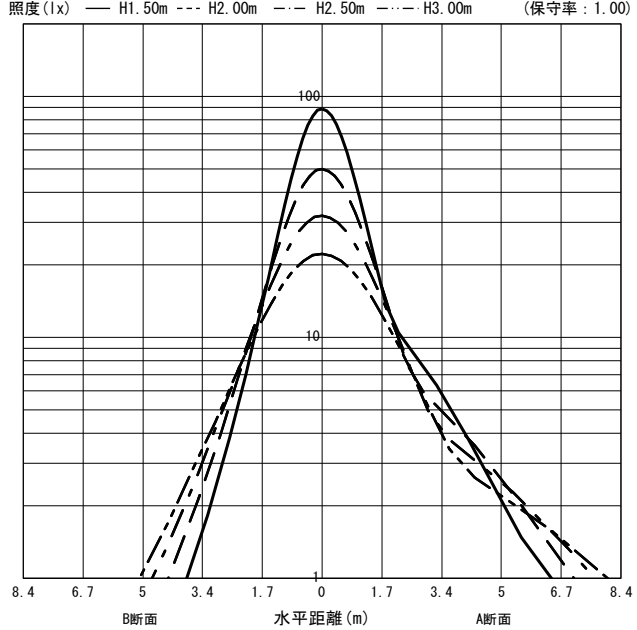

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	50	46	36	34	28	27	22	22	46	43	34	33	27	26	21	21	41	38	31	29	24	24	20	19	35	33	27	26	22	21	18	18	17	14
0.80	59	54	45	42	36	35	30	29	55	50	42	40	34	33	28	28	48	44	38	36	31	30	26	25	41	39	33	32	28	27	23	23	22	19
1.00	66	59	52	48	42	40	36	34	61	55	49	45	40	38	34	33	53	49	43	41	36	35	31	30	45	43	38	36	32	31	28	27	26	22
1.25	72	64	58	54	49	46	42	40	67	60	55	51	46	44	40	38	57	53	48	45	41	40	36	35	49	46	42	40	37	35	32	32	30	25
1.50	77	67	64	58	54	50	47	44	71	63	60	55	51	48	45	43	61	56	52	49	46	43	40	39	52	49	45	43	40	39	36	35	33	28
2.00	83	73	72	64	63	57	56	52	77	68	67	61	59	55	53	49	66	60	59	54	52	49	47	45	57	53	51	48	46	44	42	41	38	33
2.50	88	76	78	68	69	62	62	57	81	72	72	65	65	59	59	54	70	64	63	58	57	54	52	49	60	56	54	52	50	48	46	45	42	36
3.00	91	78	82	72	74	66	68	61	85	74	76	68	70	63	64	58	73	66	66	61	61	57	56	53	62	58	57	54	53	51	50	48	45	39
4.00	96	82	88	76	81	71	75	67	89	77	82	72	76	68	71	64	76	69	71	65	66	61	62	58	65	61	61	58	58	55	55	52	50	43
5.00	99	84	92	79	86	75	81	71	92	79	86	75	80	71	76	68	79	71	74	68	70	64	67	62	67	63	64	61	61	58	58	56	53	46
7.00	103	86	97	83	92	79	88	76	95	82	90	79	86	76	82	73	82	74	78	71	75	68	72	66	70	66	67	64	65	62	63	60	57	50
10.00	106	88	101	86	98	83	94	80	98	84	94	82	91	79	88	77	84	76	82	74	79	72	77	70	72	68	70	66	68	65	67	63	60	53

JIS C 8030:2014

三菱電機照明株式会社