



形名	EL-LFV2361 AHJ(13N4)	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL20S・D/10/12・N4					
最大 取付 間隔	高さ	H					
	A-A'	1.5 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		15.8%	66.7%	82.5%			
保守率		良い	0.770	普通	0.720	悪い	0.680

○配光曲線図 (cd/1000lm)

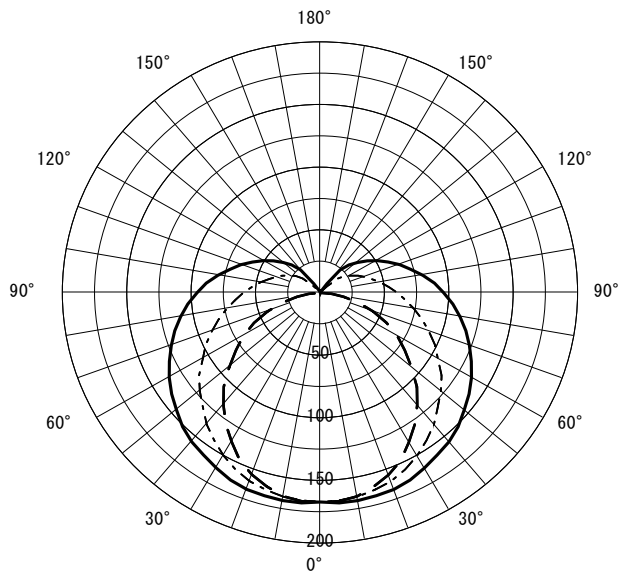

○直射水平面照度 (全光束: 1200 × 1 = 1200lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

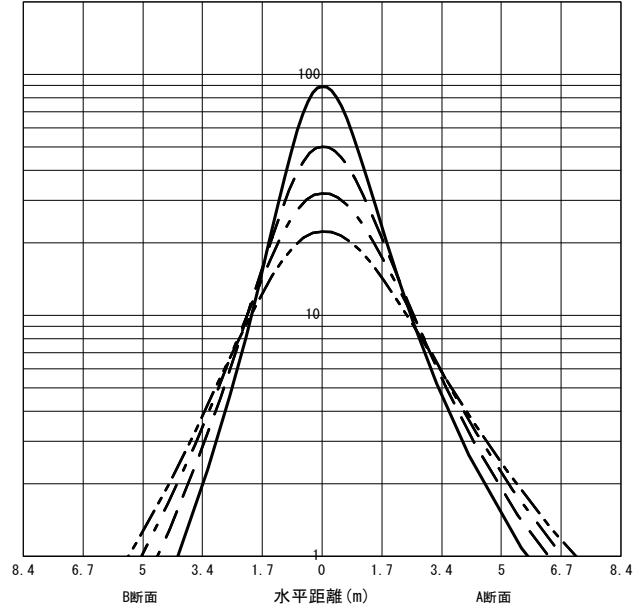

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																	
0.60	46	42	33	31	25	25	20	20	43	40	32	30	25	24	20	20	39	36	29	28	23	23	19	19	35	33	27	26	22	21	18	18	17	15
0.80	54	49	42	39	34	32	28	27	51	47	40	38	33	31	27	27	46	43	37	35	30	29	26	25	41	39	34	33	28	28	24	24	23	21
1.00	61	55	48	45	40	38	34	33	57	52	46	43	38	37	33	32	51	47	42	40	36	34	31	30	46	43	39	37	33	32	29	28	28	25
1.25	67	59	55	50	46	43	40	38	63	57	52	48	45	42	39	37	56	52	48	45	41	39	36	35	50	47	43	41	38	37	34	33	32	29
1.50	71	63	60	54	51	48	45	43	67	60	57	52	49	46	44	41	60	55	52	48	46	43	41	39	53	50	47	45	42	40	38	37	36	32
2.00	77	67	67	60	59	54	53	49	73	65	64	58	57	52	51	48	65	59	58	54	52	49	47	45	58	54	52	50	48	46	44	43	41	38
2.50	82	70	72	64	65	59	59	54	77	68	69	62	62	57	57	52	68	62	62	57	57	53	52	49	61	57	56	53	52	50	48	47	45	41
3.00	85	73	76	67	70	62	64	58	80	70	72	64	66	60	61	56	71	64	65	60	60	56	56	53	63	59	59	56	55	52	51	50	48	44
4.00	89	75	82	71	76	67	71	63	83	73	77	68	72	64	67	61	74	67	69	64	65	60	62	57	66	62	62	59	59	56	56	54	52	48
5.00	91	77	85	73	80	70	75	66	86	74	81	71	76	67	72	64	76	69	72	66	69	63	65	61	68	64	65	61	62	59	59	57	55	51
7.00	95	79	90	76	86	73	82	71	89	77	85	74	81	71	78	69	79	71	76	69	73	67	70	64	70	66	68	64	66	62	64	61	59	54
10.00	97	81	93	79	90	77	87	74	91	78	88	76	85	74	83	72	81	73	79	71	77	69	74	68	72	68	70	66	69	65	67	64	62	57

JIS C 8030:2014

三菱電機照明株式会社