



EL-LFV4221A AHX(25N5)	YOKO
	AHX

○諸特性		LDL40S・N/17/25・N5				
最大 取付 間隔	光源	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.40m	3.14m	3.91m	4.68m	
	B-B	2.13m	2.65m	3.23m	3.81m	
器具効率	上方光束	23.3%	下方光束		計	
			66.4%		89.8%	
保守率	良い	0.770	普通	0.720	悪い	0.680

○配光曲線図 (cd/1000lm)

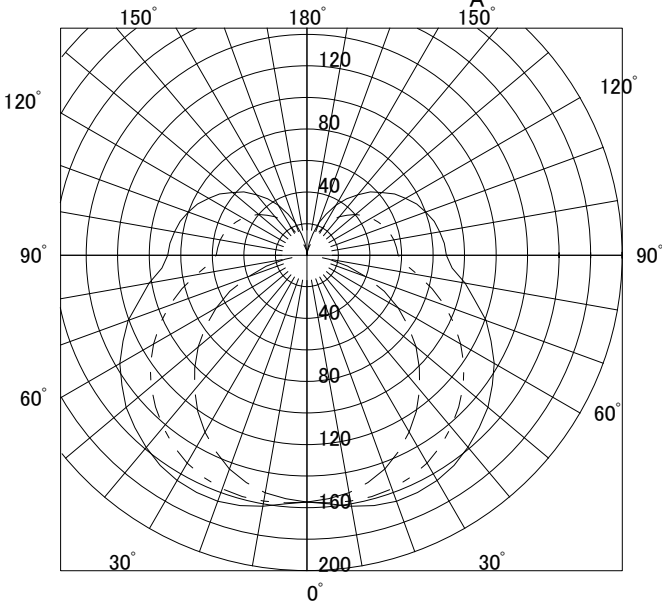

○直射水平面照度

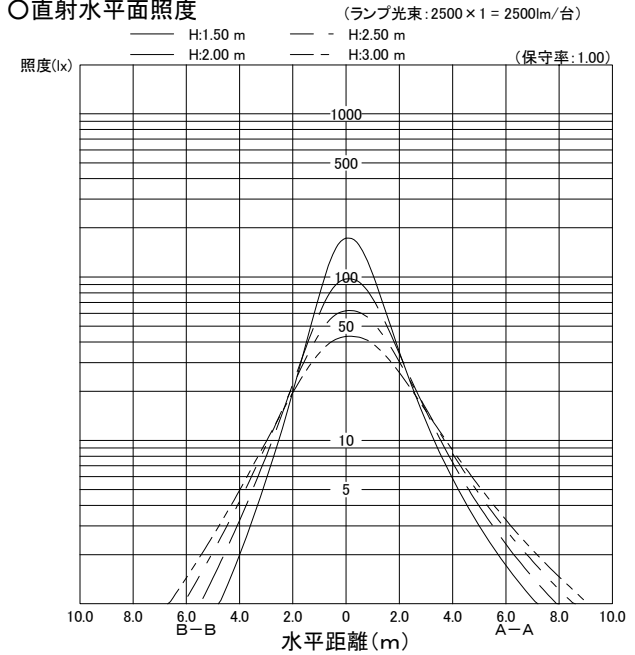

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	49	58	65	72	76	83	88	91	96	98	102	104
		10	34	45	53	58	64	67	72	76	78	81	83	86	87
	50	30	25	36	44	51	59	64	72	78	82	88	92	97	101
		10	24	34	41	48	54	58	65	69	72	76	79	82	85
70	30	30	18	28	35	42	50	55	64	70	75	82	86	92	97
		10	18	27	34	40	47	51	58	63	67	72	75	79	83
	10	10	14	22	29	34	41	45	53	58	62	68	72	76	80
	70	30	34	46	54	61	67	71	78	82	85	89	92	95	98
50		10	32	43	50	55	60	64	69	72	75	78	80	82	84
	50	30	23	34	42	49	56	61	68	74	77	83	86	91	94
		10	23	33	40	46	52	56	62	66	69	73	76	79	82
	30	30	17	27	34	40	47	52	60	67	71	77	81	87	91
30		10	17	26	33	39	45	49	56	61	64	69	72	76	79
	10	10	13	22	28	33	40	44	51	56	60	65	69	74	77
	50	30	21	31	38	44	50	54	61	65	69	73	76	80	83
		10	21	30	36	41	47	51	56	60	63	67	69	72	75
0	30	30	16	25	31	37	43	47	54	60	63	69	72	77	81
		10	15	24	30	36	41	45	51	56	59	64	66	70	73
	10	10	12	20	26	31	37	41	47	52	56	60	64	68	71
0	30	30	14	23	28	33	39	43	49	54	57	61	64	68	71
		10	14	22	28	33	38	41	47	51	54	58	61	64	67
	10	10	11	19	24	29	34	38	44	48	51	56	59	63	66
0	0	0	9	15	20	24	29	32	37	41	44	48	51	54	57