


EL-LFV4621A AHX(25N5)	TATE
	AHX


○諸特性

光源		LDL40S・N/17/25・N5			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	1.90m	2.54m	3.16m	3.77m
	B-B	2.61m	3.34m	4.13m	4.91m
器具効率		上方光束	下方光束	計	
		24.4%	64.1%	88.4%	
保守率		良い 0.770	普通 0.720	悪い 0.680	

○配光曲線図 (cd/1000lm)

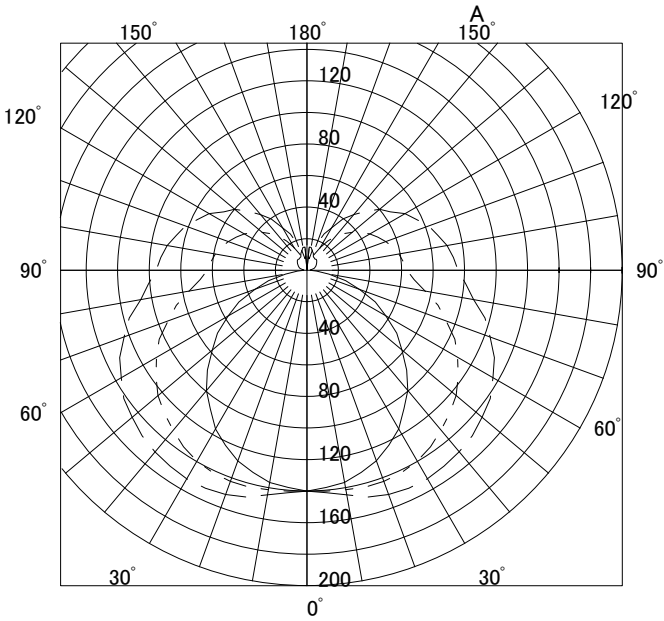

○直射水平面照度

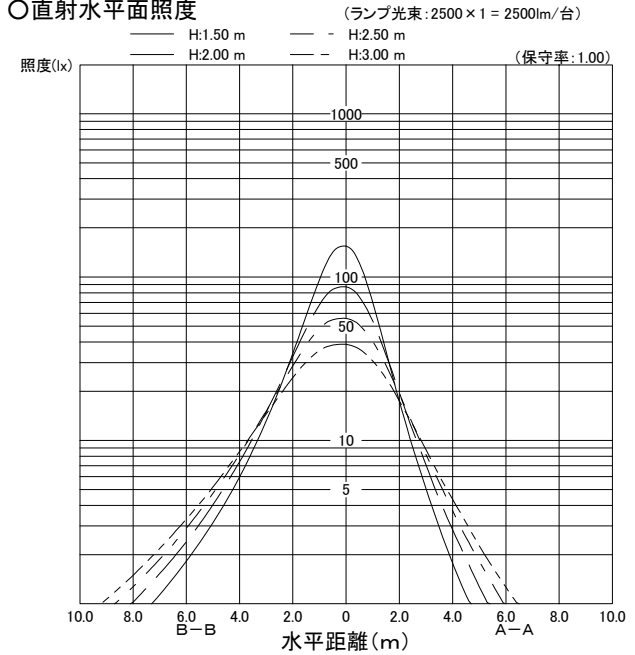

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	48	56	63	70	74	81	86	89	93	96	100	102
		10	33	44	51	57	62	65	71	74	76	79	81	84	86
	50	30	24	35	43	50	57	62	70	76	80	86	90	95	98
		10	23	33	40	46	52	56	63	67	70	74	77	80	83
70	30	30	17	27	34	41	48	53	61	68	73	79	84	90	95
		10	17	26	33	39	45	49	56	61	65	70	73	77	81
	10	10	13	21	27	33	39	43	51	56	60	66	69	74	78
		70	30	33	45	53	59	65	69	76	80	83	87	90	93
50	50	30	23	33	40	47	54	59	66	71	75	80	84	88	92
		10	22	31	38	44	50	54	60	64	67	71	74	77	80
	30	30	16	26	32	39	45	50	58	64	69	75	79	84	89
		10	16	25	31	37	43	47	54	59	62	67	70	74	77
30	10	10	12	20	26	32	38	42	49	54	58	63	67	71	75
		50	30	20	30	36	42	48	52	58	63	66	71	74	77
	30	10	20	28	34	40	45	49	54	58	61	65	67	70	73
		30	30	15	23	29	35	41	45	52	57	61	66	70	74
0	10	10	15	23	29	34	39	43	49	54	57	61	64	68	71
		10	11	19	24	29	35	39	45	50	53	58	61	66	69
	30	30	13	21	27	32	37	41	47	51	54	59	62	65	69
0	10	10	13	21	26	31	36	39	45	49	52	56	59	62	65
		10	10	17	22	27	32	36	41	46	49	53	56	60	63
0	0	0	8	14	18	22	27	30	35	39	41	45	48	52	55