


形名	EL-LFV4711A AHJ (25N5)	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				



光源		LDL40S-W/17/23-N4					
最大 取付 間隔	高さ	H					
	A-A'	1.5 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		17.2%	67.5%	84.7%			
保守率		良い	0.770	普通	0.720	悪い	0.680


○配光曲線図 (cd/1000lm)

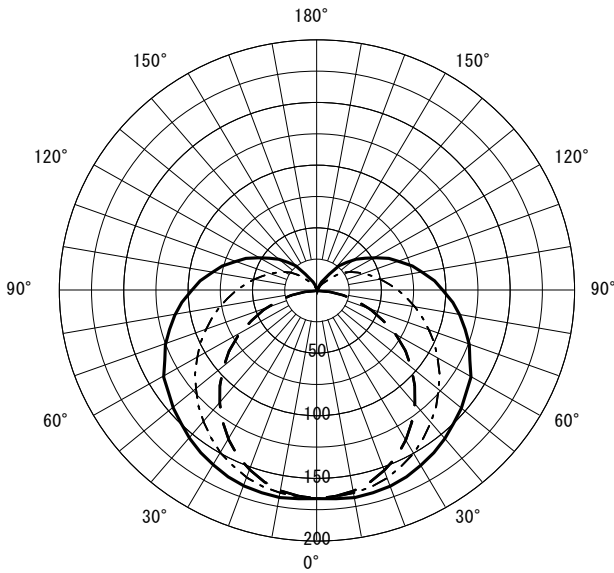

○直射水平面照度

(全光束 : 2300 × 1 = 2300lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

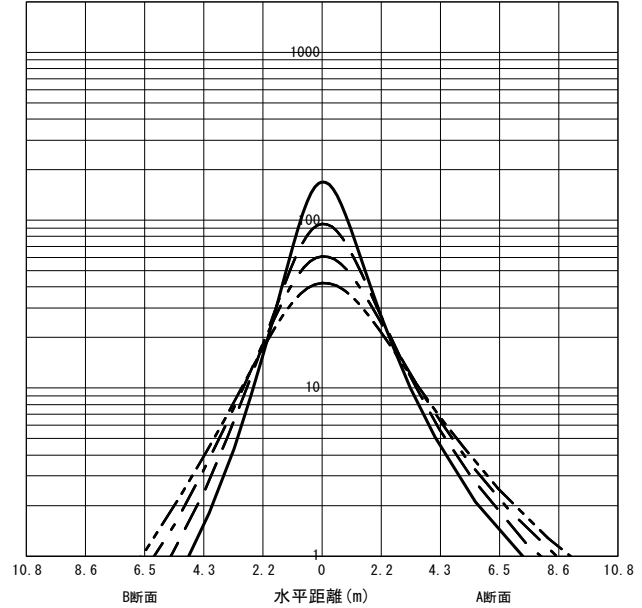

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	46	43	34	32	26	25	21	20	44	41	32	31	25	24	20	20	39	37	30	29	23	23	19	19	35	34	27	26	22	21	18	18	17	15
0.80	56	50	43	40	34	33	28	28	52	48	41	38	33	32	27	27	47	44	37	36	31	30	26	25	42	40	34	33	28	28	24	24	23	21
1.00	62	56	49	46	41	38	34	33	58	53	47	44	39	37	33	32	52	48	43	41	36	35	31	30	46	44	39	37	33	33	29	29	28	25
1.25	68	61	56	51	47	44	41	39	64	58	53	49	45	43	39	38	57	52	48	45	42	40	37	36	51	48	44	42	38	37	34	33	32	29
1.50	73	64	61	55	52	49	46	43	68	61	58	53	50	47	44	42	61	56	52	49	46	44	41	40	54	51	47	45	42	41	38	37	36	32
2.00	79	69	69	61	61	55	54	50	74	66	65	59	58	53	52	49	66	60	59	55	53	50	48	46	58	55	53	50	48	46	44	43	42	38
2.50	83	72	74	65	66	60	60	55	78	69	70	63	63	58	58	53	69	63	63	58	58	54	53	50	61	58	56	54	52	50	49	47	45	41
3.00	87	74	78	68	71	63	65	59	81	71	74	66	68	61	62	57	72	65	66	61	61	57	57	54	64	60	59	56	55	53	52	50	49	44
4.00	91	77	84	72	77	68	72	64	85	74	79	70	74	66	69	62	75	68	71	65	66	61	63	58	67	63	63	60	60	57	57	55	53	48
5.00	93	79	87	75	82	71	77	68	88	76	82	72	78	69	73	66	78	70	74	67	70	64	66	61	69	65	66	62	63	60	60	58	56	51
7.00	97	81	92	78	87	75	83	72	91	78	87	75	83	73	79	70	80	72	77	70	74	68	71	66	71	67	69	65	67	63	64	61	59	55
10.00	99	83	96	81	92	78	89	76	93	80	90	78	87	76	84	74	83	74	80	73	78	71	76	69	73	69	72	67	70	66	68	65	62	58

JIS C 8030:2014

三菱電機照明株式会社